



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint®\_rate2006 = 679

SuperServer 2027GR-TRF (X9DRG-HF, Intel E5-2690)

SPECint\_rate\_base2006 = 651

CPU2006 license: 001176


Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

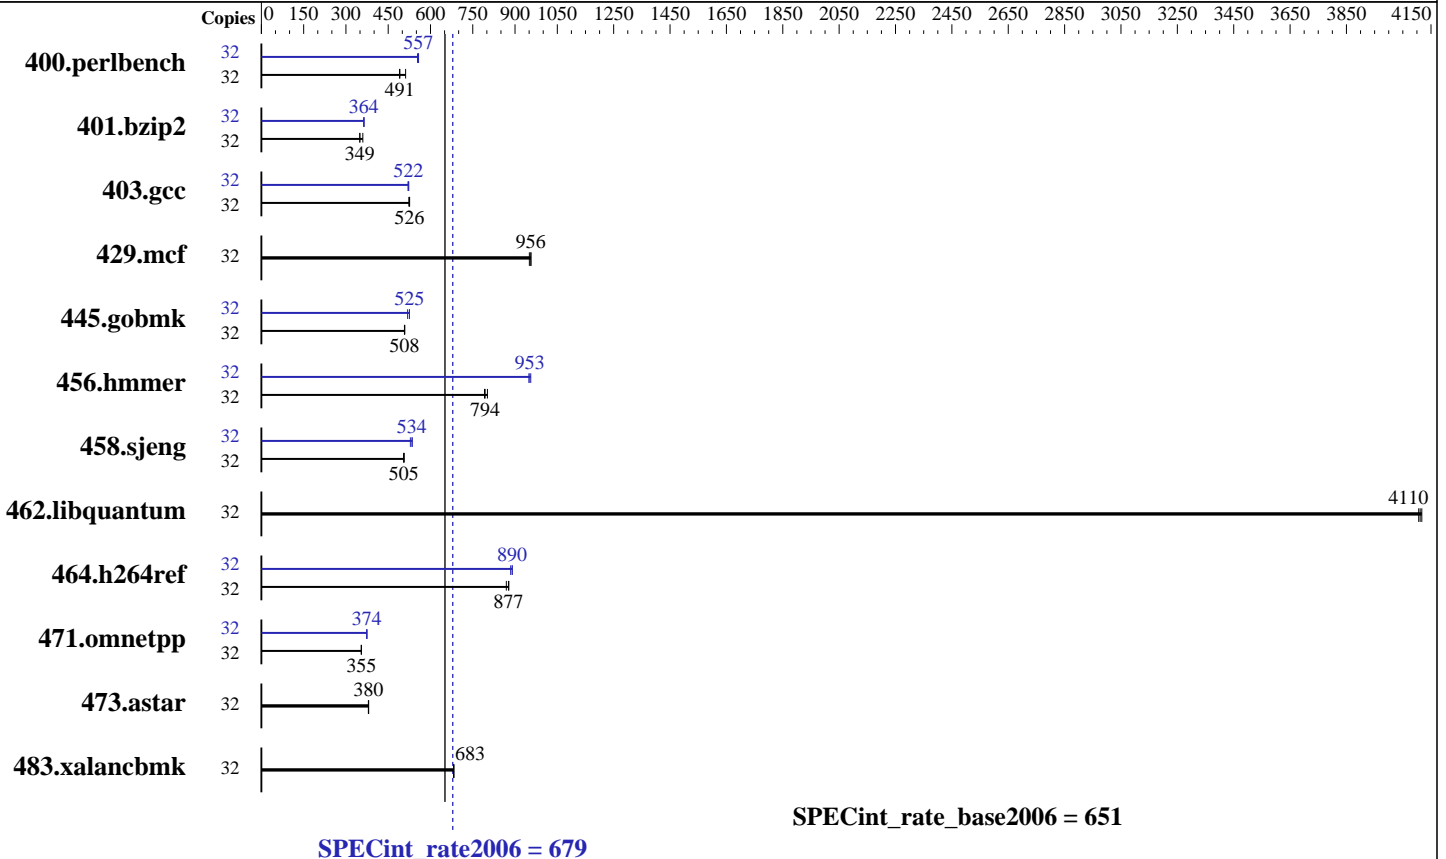

### Hardware

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint\_rate2006 = 679

SuperServer 2027GR-TRF (X9DRG-HF, Intel E5-2690)

SPECint\_rate\_base2006 = 651

CPU2006 license: 001176

Test date: Jan-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Oct-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	611	512	638	490	<b>636</b>	<b>491</b>	32	561	558	564	554	<b>561</b>	<b>557</b>
401.bzip2	32	858	360	<b>884</b>	<b>349</b>	884	349	32	850	363	848	364	<b>849</b>	<b>364</b>
403.gcc	32	490	526	492	523	<b>490</b>	<b>526</b>	32	<b>493</b>	<b>522</b>	495	520	493	523
429.mcf	32	305	956	<b>305</b>	<b>956</b>	307	951	32	305	956	<b>305</b>	<b>956</b>	307	951
445.gobmk	32	<b>661</b>	<b>508</b>	661	508	660	509	32	647	519	639	525	<b>639</b>	<b>525</b>
456.hammer	32	372	802	377	792	<b>376</b>	<b>794</b>	32	315	949	312	956	<b>313</b>	<b>953</b>
458.sjeng	32	<b>766</b>	<b>505</b>	764	507	766	505	32	732	529	<b>725</b>	<b>534</b>	723	535
462.libquantum	32	<b>161</b>	<b>4110</b>	161	4110	161	4120	32	<b>161</b>	<b>4110</b>	161	4110	161	4120
464.h264ref	32	<b>808</b>	<b>877</b>	807	878	815	869	32	<b>796</b>	<b>890</b>	796	890	801	884
471.omnetpp	32	<b>564</b>	<b>355</b>	563	355	564	355	32	<b>535</b>	<b>374</b>	535	374	534	374
473.astar	32	<b>591</b>	<b>380</b>	590	381	592	380	32	<b>591</b>	<b>380</b>	590	381	592	380
483.xalancbmk	32	<b>323</b>	<b>683</b>	323	683	324	682	32	<b>323</b>	<b>683</b>	323	683	324	682

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECint\_rate2006 = 679**

SuperServer 2027GR-TRF (X9DRG-HF, Intel E5-2690)

**SPECint\_rate\_base2006 = 651**

**CPU2006 license:** 001176

**Test date:** Jan-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

`-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECint\_rate2006 = 679**

SuperServer 2027GR-TRF (X9DRG-HF, Intel E5-2690)

**SPECint\_rate\_base2006 = 651**

**CPU2006 license:** 001176

**Test date:** Jan-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
 -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECint\_rate2006 = 679**

SuperServer 2027GR-TRF (X9DRG-HF, Intel E5-2690)

**SPECint\_rate\_base2006 = 651**

**CPU2006 license:** 001176

**Test date:** Jan-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 02:26:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 March 2012.