



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037MC-H8TRF (X9SCD-F single node, Intel Pentium G620)

SPECfp<sup>®</sup>2006 = 38.6

SPECfp\_base2006 = 37.9

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Aug-2011

Software Availability: Oct-2011

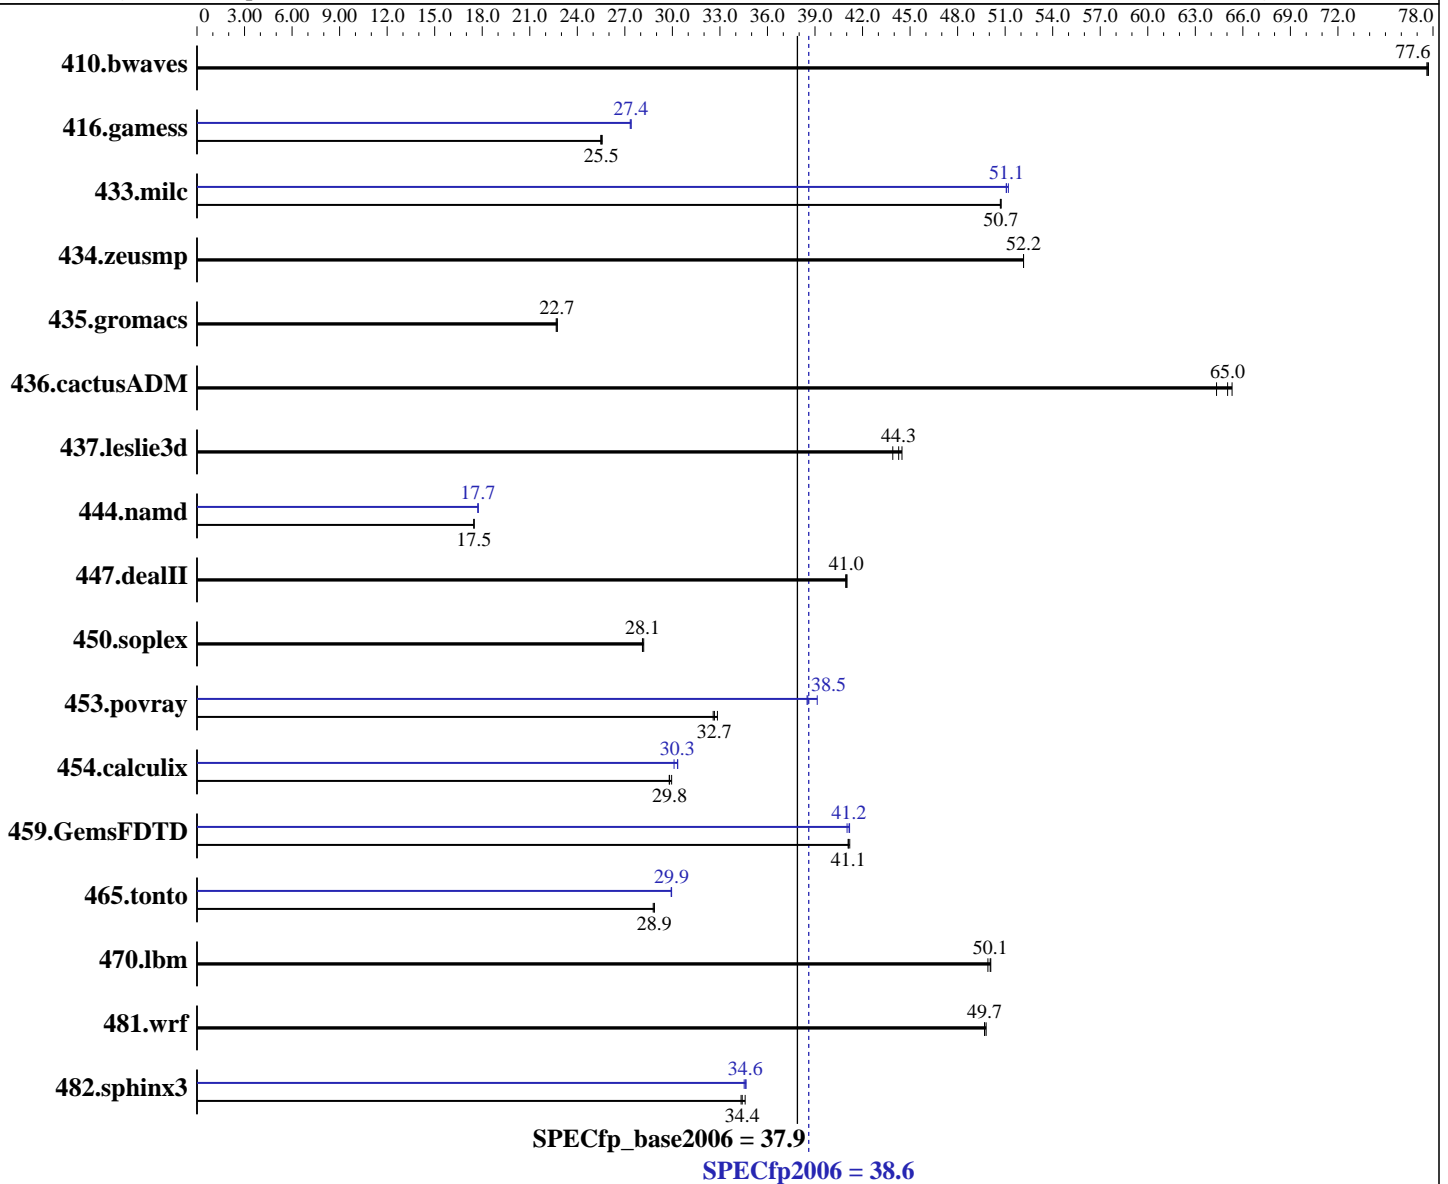

### Hardware

CPU Name: Intel Pentium G620  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037MC-H8TRF (X9SCD-F single node, Intel Pentium G620)

SPECfp2006 = 38.6

SPECfp\_base2006 = 37.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Aug-2011

Software Availability: Oct-2011

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1066 MHz and CL7)  
Disk Subsystem: 1 x 500 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	175	77.6	175	77.7	<b>175</b>	<b>77.6</b>	175	77.6	175	77.7	<b>175</b>	<b>77.6</b>
416.gamess	766	25.6	768	25.5	<b>767</b>	<b>25.5</b>	<b>715</b>	<b>27.4</b>	716	27.3	715	27.4
433.milc	<b>181</b>	<b>50.7</b>	181	50.7	181	50.7	179	51.2	<b>180</b>	<b>51.1</b>	180	51.1
434.zeusmp	<b>174</b>	<b>52.2</b>	174	52.2	174	52.2	<b>174</b>	<b>52.2</b>	174	52.2	174	52.2
435.gromacs	315	22.7	314	22.7	<b>314</b>	<b>22.7</b>	315	22.7	314	22.7	<b>314</b>	<b>22.7</b>
436.cactusADM	183	65.3	<b>184</b>	<b>65.0</b>	186	64.3	183	65.3	<b>184</b>	<b>65.0</b>	186	64.3
437.leslie3d	211	44.5	<b>212</b>	<b>44.3</b>	214	43.9	211	44.5	<b>212</b>	<b>44.3</b>	214	43.9
444.namd	459	17.5	459	17.5	<b>459</b>	<b>17.5</b>	452	17.7	<b>452</b>	<b>17.7</b>	452	17.7
447.dealII	279	41.0	279	40.9	<b>279</b>	<b>41.0</b>	279	41.0	279	40.9	<b>279</b>	<b>41.0</b>
450.soplex	297	28.1	296	28.2	<b>297</b>	<b>28.1</b>	297	28.1	296	28.2	<b>297</b>	<b>28.1</b>
453.povray	162	32.8	<b>163</b>	<b>32.7</b>	163	32.6	136	39.1	138	38.5	<b>138</b>	<b>38.5</b>
454.calculix	<b>277</b>	<b>29.8</b>	275	30.0	277	29.8	274	30.1	272	30.3	<b>272</b>	<b>30.3</b>
459.GemsFDTD	258	41.2	<b>258</b>	<b>41.1</b>	258	41.1	259	41.0	<b>258</b>	<b>41.2</b>	258	41.2
465.tonto	342	28.8	341	28.9	<b>341</b>	<b>28.9</b>	<b>329</b>	<b>29.9</b>	329	29.9	329	29.9
470.lbm	<b>274</b>	<b>50.1</b>	274	50.1	275	49.9	<b>274</b>	<b>50.1</b>	274	50.1	275	49.9
481.wrf	225	49.7	<b>225</b>	<b>49.7</b>	224	49.8	225	49.7	<b>225</b>	<b>49.7</b>	224	49.8
482.sphinx3	568	34.3	563	34.6	<b>566</b>	<b>34.4</b>	564	34.5	562	34.7	<b>563</b>	<b>34.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037MC-H8TRF (X9SCD-F single node, Intel Pentium G620)

SPECfp2006 = 38.6

SPECfp\_base2006 = 37.9

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2012  
Hardware Availability: Aug-2011  
Software Availability: Oct-2011

### General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037MC-H8TRF (X9SCD-F single node, Intel Pentium G620)

SPECfp2006 = 38.6

SPECfp\_base2006 = 37.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Aug-2011

Software Availability: Oct-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037MC-H8TRF (X9SCD-F single node, Intel Pentium G620)

SPECfp2006 = 38.6

SPECfp\_base2006 = 37.9

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Aug-2011

Software Availability: Oct-2011

## Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037MC-H8TRF (X9SCD-F single node,  
Intel Pentium G620)

**SPECfp2006 = 38.6**

**SPECfp\_base2006 = 37.9**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Mar-2012

**Hardware Availability:** Aug-2011

**Software Availability:** Oct-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 07:27:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 April 2012.