



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp®_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

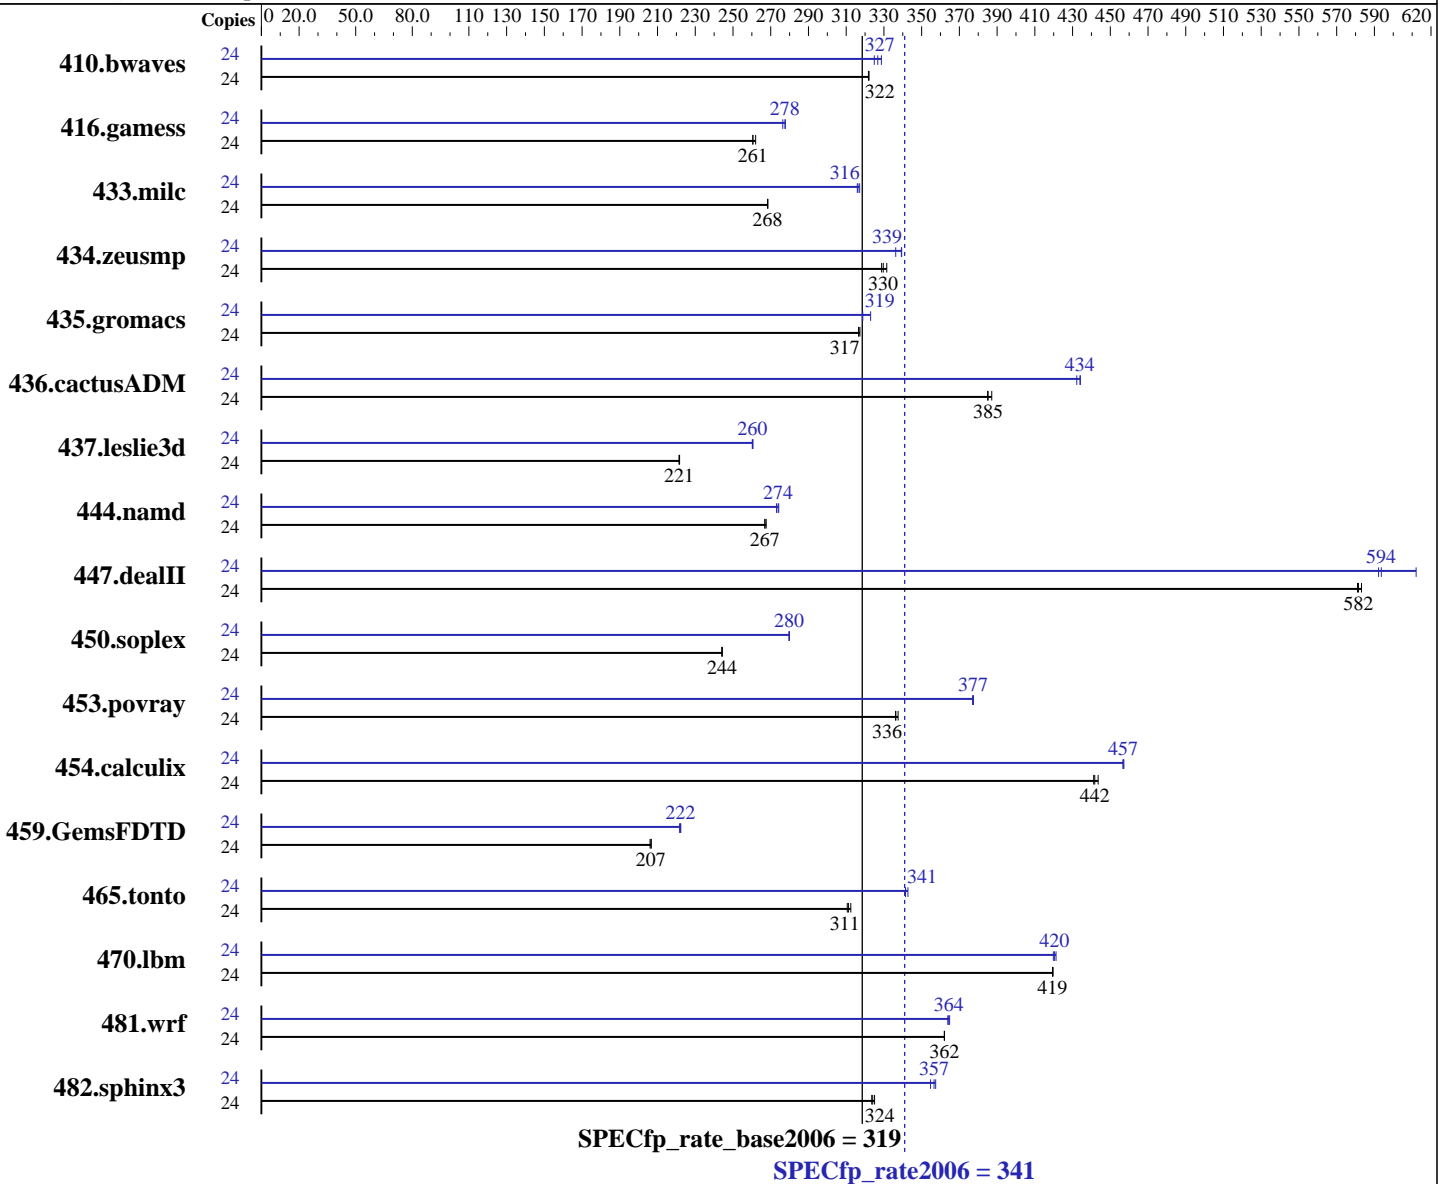

Hardware

CPU Name: AMD Opteron 6238
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 1024 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1014	322	1013	322	1013	322	24	992	329	998	327	1004	325
416.gamess	24	1804	261	1804	260	1794	262	24	1692	278	1700	276	1693	278
433.milc	24	821	268	821	268	821	268	24	695	317	697	316	697	316
434.zeusmp	24	659	332	663	330	664	329	24	649	336	643	339	644	339
435.gromacs	24	541	317	540	317	541	317	24	531	323	538	319	538	319
436.cactusADM	24	741	387	744	385	745	385	24	664	432	661	434	661	434
437.leslie3d	24	1018	222	1019	221	1019	221	24	866	261	866	260	867	260
444.namd	24	719	268	721	267	721	267	24	705	273	702	274	703	274
447.dealII	24	471	583	472	582	473	581	24	462	594	449	612	464	592
450.soplex	24	819	244	820	244	819	244	24	715	280	716	280	715	280
453.povray	24	380	336	380	336	378	338	24	339	377	338	377	338	377
454.calculix	24	449	441	448	442	446	444	24	433	457	433	457	433	457
459.GemsFDTD	24	1233	207	1236	206	1232	207	24	1146	222	1149	222	1146	222
465.tonto	24	759	311	756	312	760	311	24	692	341	692	341	689	343
470.lbm	24	786	420	786	419	786	419	24	784	420	785	420	783	421
481.wrf	24	740	362	740	362	741	362	24	736	364	735	365	737	364
482.sphinx3	24	1443	324	1446	324	1439	325	24	1309	357	1312	357	1319	355

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/usr/cpu2006/amd1104-rate-libs-revB/32:/usr/cpu2006/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
openc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2012
Hardware Availability: Nov-2011
Software Availability: Dec-2011

Peak Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
      -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
      -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
      -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
      -OPT:unroll_times_max=8 -OPT:unroll_size=256
      -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
      -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
      -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
      -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso
```

C++ benchmarks:

```
444.namd: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
      -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
      -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
      -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
      -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
      -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
      -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
      -TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
      -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

450.soplex (continued):

-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022TG-HTRF
(H8DGT-HF, AMD Opteron 6238)

SPECfp_rate2006 = 341

SPECfp_rate_base2006 = 319

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

```
481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
        -CG:load_exe=1 -HP -WOPT:sib=on
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 07:54:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 April 2012.