



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

**SPECfp®\_rate2006 = 337**

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_rate\_base2006 = 331**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

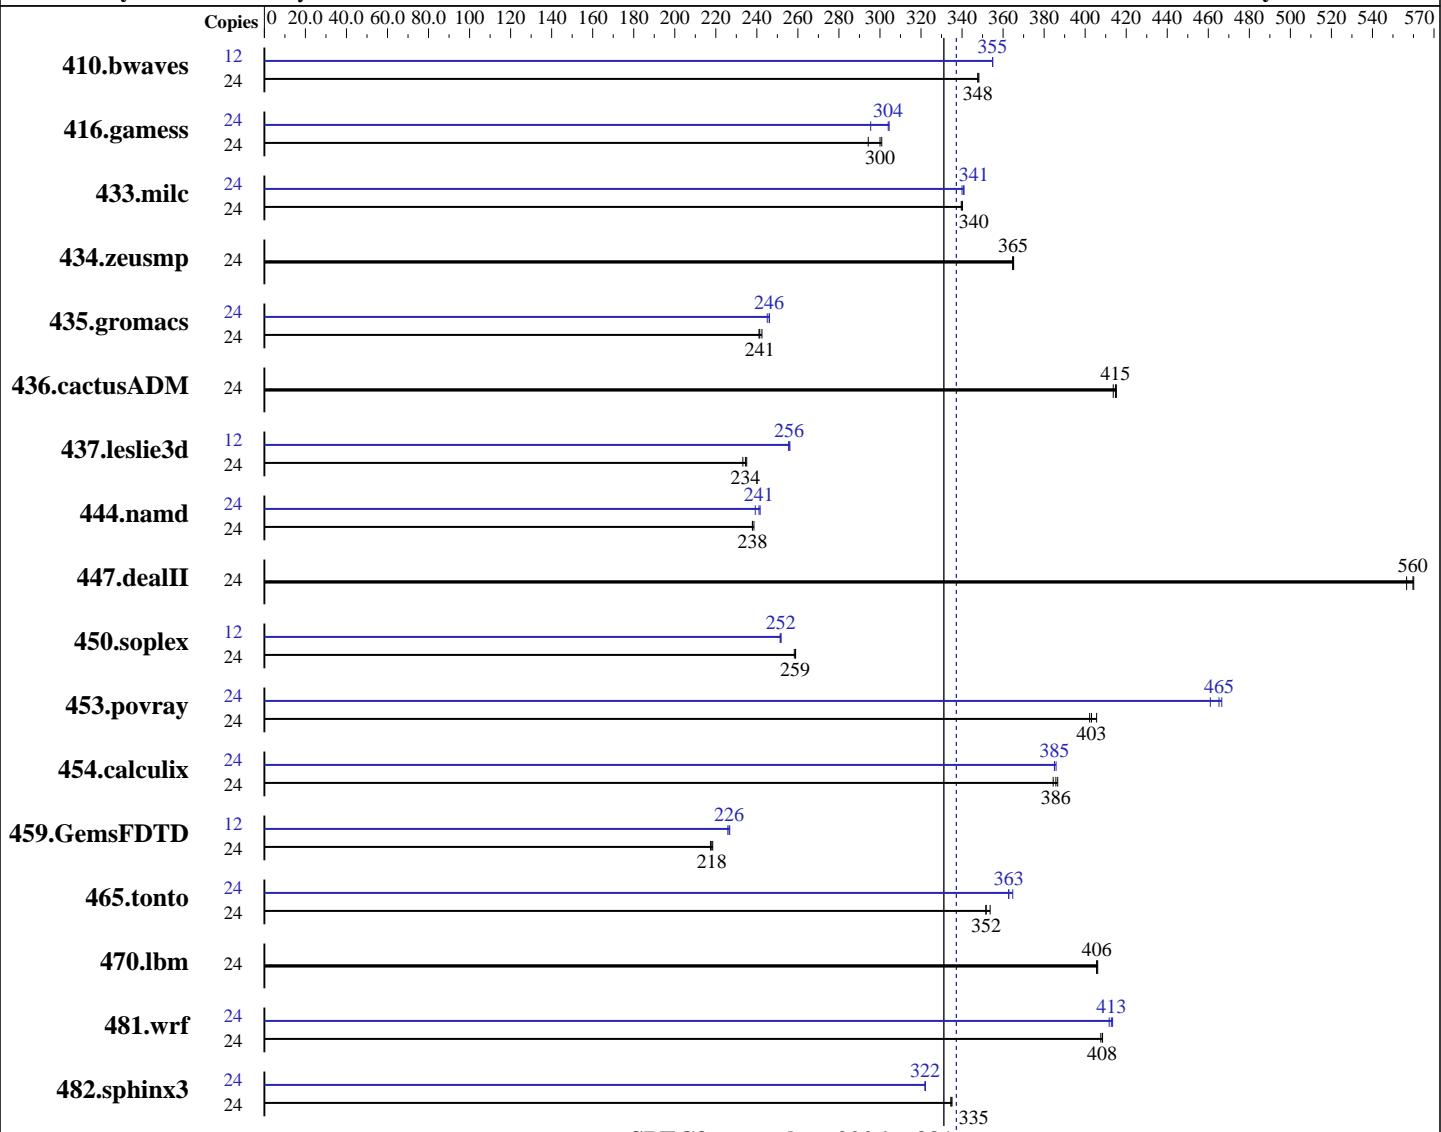

**SPECfp\_rate\_base2006 = 331**

**SPECfp\_rate2006 = 337**

### Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_rate2006 = 337**

**SPECfp\_rate\_base2006 = 331**

**CPU2006 license:** 9019

**Test date:** Mar-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)  
 Disk Subsystem: 1 x 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	938	348	937	348	<b><u>938</u></b>	<b><u>348</u></b>	12	460	355	459	355	<b><u>460</u></b>	<b><u>355</u></b>		
416.gamess	24	1597	294	1562	301	<b><u>1566</u></b>	<b><u>300</u></b>	24	1543	304	<b><u>1546</u></b>	<b><u>304</u></b>	1590	295		
433.milc	24	648	340	649	340	<b><u>648</u></b>	<b><u>340</u></b>	24	<b><u>647</u></b>	<b><u>341</u></b>	648	340	646	341		
434.zeusmp	24	598	365	<b><u>598</u></b>	<b><u>365</u></b>	599	365	24	598	365	<b><u>598</u></b>	<b><u>365</u></b>	599	365		
435.gromacs	24	707	242	711	241	<b><u>710</u></b>	<b><u>241</u></b>	24	<b><u>697</u></b>	<b><u>246</u></b>	696	246	699	245		
436.cactusADM	24	691	415	693	414	<b><u>691</u></b>	<b><u>415</u></b>	24	691	415	693	414	<b><u>691</u></b>	<b><u>415</u></b>		
437.leslie3d	24	968	233	<b><u>962</u></b>	<b><u>234</u></b>	960	235	12	<b><u>441</u></b>	<b><u>256</u></b>	440	256	442	255		
444.namd	24	<b><u>809</u></b>	<b><u>238</u></b>	807	239	809	238	24	805	239	<b><u>799</u></b>	<b><u>241</u></b>	797	242		
447.dealII	24	<b><u>491</u></b>	<b><u>560</u></b>	493	557	490	560	24	<b><u>491</u></b>	<b><u>560</u></b>	493	557	490	560		
450.soplex	24	<b><u>774</u></b>	<b><u>259</u></b>	773	259	775	258	12	<b><u>398</u></b>	<b><u>252</u></b>	397	252	398	251		
453.povray	24	317	402	<b><u>317</u></b>	<b><u>403</u></b>	315	406	24	274	467	<b><u>274</u></b>	<b><u>465</u></b>	277	461		
454.calculix	24	515	384	512	387	<b><u>513</u></b>	<b><u>386</u></b>	24	514	385	513	386	<b><u>514</u></b>	<b><u>385</u></b>		
459.GemsFDTD	24	1165	218	<b><u>1168</u></b>	<b><u>218</u></b>	1171	217	12	<b><u>562</u></b>	<b><u>226</u></b>	561	227	564	226		
465.tonto	24	<b><u>671</u></b>	<b><u>352</u></b>	672	352	668	354	24	648	365	651	363	<b><u>651</u></b>	<b><u>363</u></b>		
470.lbm	24	812	406	<b><u>813</u></b>	<b><u>406</u></b>	813	406	24	812	406	<b><u>813</u></b>	<b><u>406</u></b>	813	406		
481.wrf	24	656	408	<b><u>657</u></b>	<b><u>408</u></b>	658	408	24	<b><u>649</u></b>	<b><u>413</u></b>	649	413	651	412		
482.sphinx3	24	1398	335	1396	335	<b><u>1398</u></b>	<b><u>335</u></b>	24	<b><u>1453</u></b>	<b><u>322</u></b>	1452	322	1453	322		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_rate2006 = 337**

**SPECfp\_rate\_base2006 = 331**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Platform Notes

### BIOS Configuration:

Intel(R) Hyper-Threading Technology set to Enabled  
Processor Power State C6 set to Disabled  
Processor Power State C1 Enhanced set to Disabled  
Power Technology set to Custom  
Energy Performance set to Performance  
DRAM Clock Throttling set to Performance  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3  
running on speccpu-rhel6.2 Sat Mar 31 11:26:23 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings : 12
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      132101632 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux speccpu-rhel6.2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
    2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 31 11:10
```

```
SPEC is set to: /opt/cpu2006-1.2
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda2        ext4  274G   10G  250G   4%  /
```

Additional information from dmidecode:  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECfp\_rate2006 = 337**

**SPECfp\_rate\_base2006 = 331**

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

### Memory:

16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/lib32:/opt/cpu2006-1.2/lib64"

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2  
Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECfp\_rate2006 = 337**

**SPECfp\_rate\_base2006 = 331**

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_rate2006 = 337**

**CPU2006 license:** 9019

**Test date:** Mar-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

```

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
             -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
            -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
            -inline-level=0 -scalar-rep- -static

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2620, 2.00 GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

SPECfp\_rate2006 = 337

SPECfp\_rate\_base2006 = 331

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 07:58:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 May 2012.