




SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2637)

SPECint®_rate2006 = 196

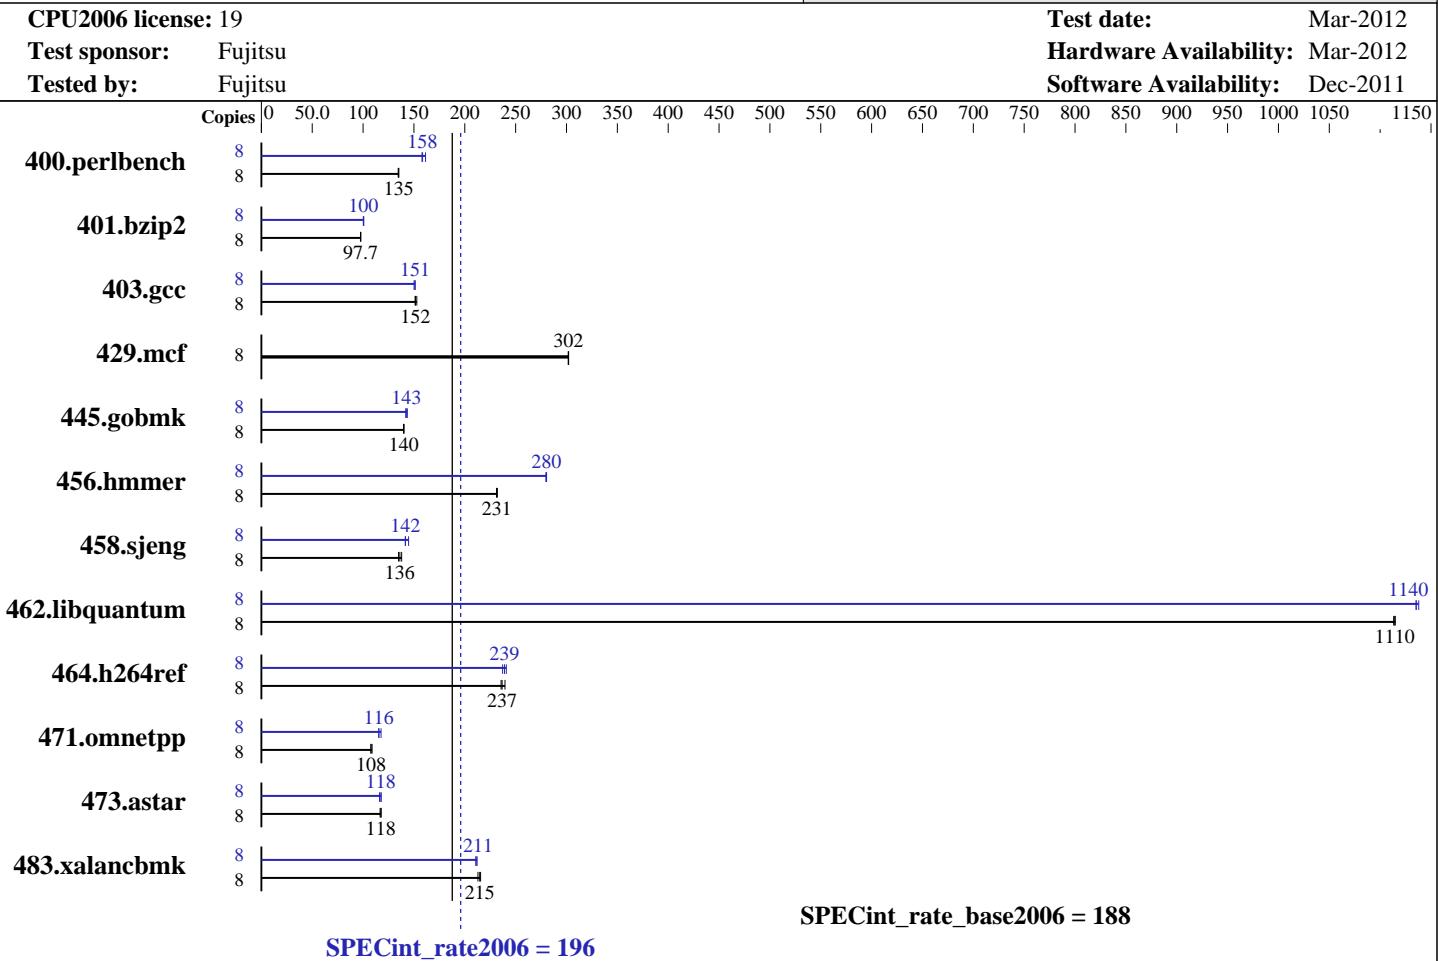

Hardware		Software	
CPU Name:	Intel Xeon E5-2637	Operating System:	Red Hat Enterprise Linux Server release 6.1, 2.6.32-131.0.15.el6.x86_64
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz	Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux
CPU MHz:	3000	Auto Parallel:	No
FPU:	Integrated	File System:	ReiserFS
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip, 2 threads/core	System State:	Run level 3 (multi - user)
CPU(s) orderable:	1,2 chips	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap 10 (Multi-Core)
L3 Cache:	5 MB I+D on chip per chip		
Other Cache:	None		
Memory:	64 GB (16 x 4 GB 2Rx8 PC3-12800R-11, ECC)		
Disk Subsystem:	1 x SATA III, 500 GB, 7200 rpm		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2637)

SPECint_rate2006 = 196

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	579	135	581	135	579	135	8	484	161	493	158	495	158
401.bzip2	8	790	97.7	791	97.7	792	97.5	8	767	101	770	100	769	100
403.gcc	8	425	152	426	151	421	153	8	429	150	426	151	426	151
429.mcf	8	242	302	242	302	242	302	8	242	302	242	302	242	302
445.gobmk	8	599	140	599	140	600	140	8	585	144	589	143	591	142
456.hammer	8	323	231	322	232	322	231	8	266	280	267	280	266	280
458.sjeng	8	711	136	702	138	718	135	8	683	142	669	145	684	141
462.libquantum	8	149	1110	149	1110	149	1110	8	146	1140	146	1140	146	1140
464.h264ref	8	751	236	739	240	748	237	8	746	237	735	241	741	239
471.omnetpp	8	465	108	464	108	459	109	8	433	115	425	118	433	116
473.astar	8	478	118	481	117	477	118	8	478	118	483	116	477	118
483.xalancbmk	8	256	216	259	213	257	215	8	261	211	262	211	260	212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file. For full details on using numactl, please refer to your Linux documentation, 'man numactl'

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Frequency Floor Override = Enabled

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"

Binaries compiled on a system with
2x Xeon E5-2690 CPU + 64 GB memory using
Red Hat Enterprise Linux Server release 6.1 (Santiago)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2637)

SPECint_rate2006 = 196

SPECint_rate_base2006 = 188

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
403.gcc: icc -m32
```

```
429.mcf: icc -m32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2637)

SPECint_rate2006 = 196

SPECint_rate_base2006 = 188

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

445.gobmk: icc -m32

462.libquantum: icc -m32

464.h264ref: icc -m32

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R920 (Intel Xeon E5-2637)

SPECint_rate2006 = 196

SPECint_rate_base2006 = 188

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap/lib -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs
-L/opt/SmartHeap/lib -lsmartheap

483.xalancbmk: Same as 473.astar

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:59:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 April 2012.