



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp®2006 = 35.7

SuperServer 5017C-MF (X9SCL-F, Intel G530)

SPECfp\_base2006 = 35.0

CPU2006 license: 001176


Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Oct-2011

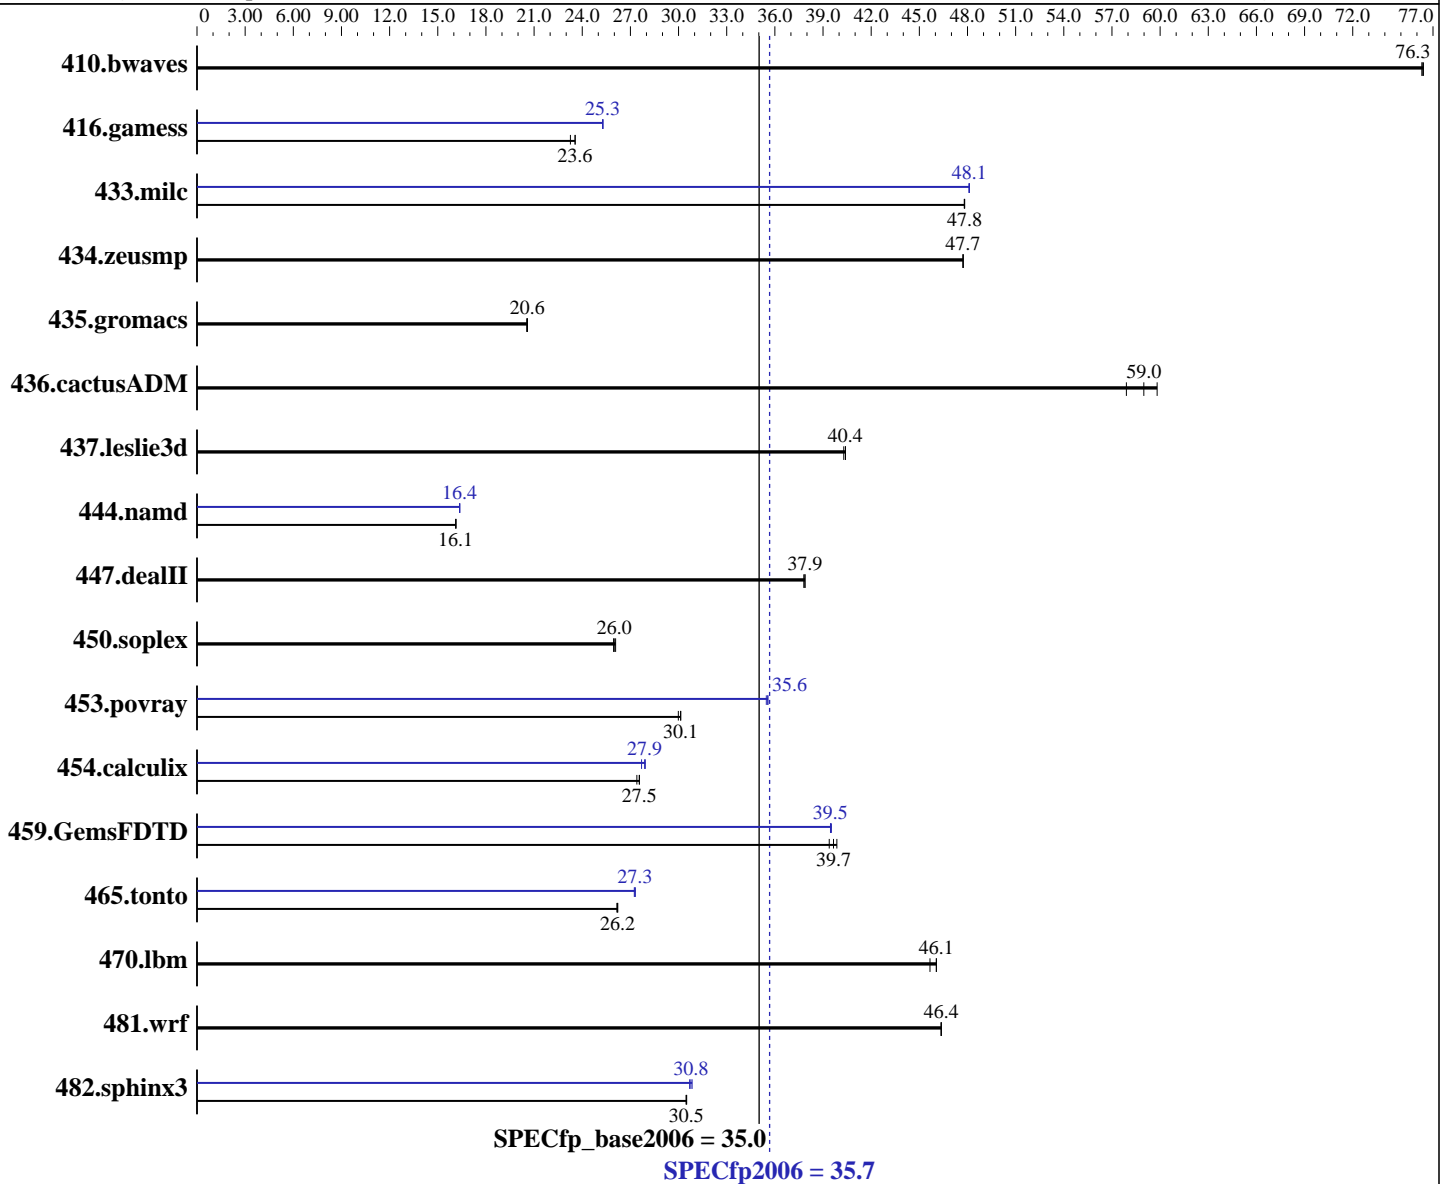

### Hardware

CPU Name: Intel Celeron G530  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **35.7**

SuperServer 5017C-MF (X9SCL-F, Intel G530)

SPECfp\_base2006 = **35.0**

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Apr-2011

Tested by: Supermicro

Software Availability: Oct-2011

L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	178	76.4	178	76.3	<b>178</b>	<b>76.3</b>	178	76.4	178	76.3	<b>178</b>	<b>76.3</b>
416.gamess	842	23.3	831	23.6	<b>831</b>	<b>23.6</b>	775	25.3	774	25.3	<b>775</b>	<b>25.3</b>
433.milc	192	47.8	<b>192</b>	<b>47.8</b>	192	47.8	<b>191</b>	<b>48.1</b>	191	48.1	191	48.1
434.zeusmp	191	47.7	<b>191</b>	<b>47.7</b>	191	47.7	191	47.7	<b>191</b>	<b>47.7</b>	191	47.7
435.gromacs	348	20.5	347	20.6	<b>347</b>	<b>20.6</b>	348	20.5	347	20.6	<b>347</b>	<b>20.6</b>
436.cactusADM	<b>203</b>	<b>59.0</b>	200	59.8	206	57.9	<b>203</b>	<b>59.0</b>	200	59.8	206	57.9
437.leslie3d	<b>233</b>	<b>40.4</b>	233	40.4	233	40.3	<b>233</b>	<b>40.4</b>	233	40.4	233	40.3
444.namd	497	16.1	<b>497</b>	<b>16.1</b>	497	16.1	<b>490</b>	<b>16.4</b>	490	16.4	490	16.4
447.dealII	302	37.9	<b>302</b>	<b>37.9</b>	303	37.8	302	37.9	<b>302</b>	<b>37.9</b>	303	37.8
450.soplex	320	26.1	321	26.0	<b>321</b>	<b>26.0</b>	320	26.1	321	26.0	<b>321</b>	<b>26.0</b>
453.povray	177	30.0	177	30.1	<b>177</b>	<b>30.1</b>	150	35.5	150	35.6	<b>150</b>	<b>35.6</b>
454.calculix	299	27.6	<b>299</b>	<b>27.5</b>	301	27.4	295	27.9	<b>296</b>	<b>27.9</b>	298	27.7
459.GemsFDTD	<b>268</b>	<b>39.7</b>	269	39.4	266	39.9	<b>269</b>	<b>39.5</b>	269	39.5	268	39.5
465.tonto	<b>376</b>	<b>26.2</b>	376	26.2	375	26.2	361	27.2	<b>361</b>	<b>27.3</b>	360	27.3
470.lbm	298	46.1	301	45.7	<b>298</b>	<b>46.1</b>	298	46.1	301	45.7	<b>298</b>	<b>46.1</b>
481.wrf	241	46.4	241	46.4	<b>241</b>	<b>46.4</b>	241	46.4	241	46.4	<b>241</b>	<b>46.4</b>
482.sphinx3	639	30.5	<b>639</b>	<b>30.5</b>	639	30.5	632	30.8	635	30.7	<b>633</b>	<b>30.8</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on localhost.localdomain Fri Apr 6 20:34:44 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 35.7**

SuperServer 5017C-MF (X9SCL-F, Intel G530)

**SPECfp\_base2006 = 35.0**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Apr-2011

Software Availability: Oct-2011

### Platform Notes (Continued)

model name : Intel(R) Celeron(R) CPU G530 @ 2.40GHz

1 "physical id"s (chips)

2 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 2

physical 0: cores 0 1

cache size : 2048 KB

From /proc/meminfo

MemTotal: 8040724 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsc\_release -d

Red Hat Enterprise Linux Server release 6.1 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux localhost.localdomain 2.6.32-131.0.15.el6.x86\_64 #1 SMP Tue May 10 15:42:40 EDT 2011 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Apr 6 20:34

SPEC is set to: /usr/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/mapper/VolGroup-lv\_root

ext4 50G 35G 13G 75% /

Additional information from dmidecode:

Memory:

2x Micron 18JSF51272AZ-1G4D1 4 GB 1067 MHz 2 rank

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

OMP\_NUM\_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RHEL5.5

Transparent Huge Pages enabled with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

**SuperServer 5017C-MF (X9SCL-F, Intel G530)**

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176

**Test date:** Apr-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Apr-2011

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## General Notes (Continued)

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

**SuperServer 5017C-MF (X9SCL-F, Intel G530)**

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176

**Test date:** Apr-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Apr-2011

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

**SuperServer 5017C-MF (X9SCL-F, Intel G530)**

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176

**Test date:** Apr-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Apr-2011

**Tested by:** Supermicro

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 35.7**

SuperServer 5017C-MF (X9SCL-F, Intel G530)

**SPECfp\_base2006 = 35.0**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Apr-2011

**Software Availability:** Oct-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 05:06:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 May 2012.