



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint®\_rate2006 = 611**

IBM System x3500 M4 (Intel Xeon E5-2665)

**SPECint\_rate\_base2006 = 588**

CPU2006 license: 11


**Test date:** Apr-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2012

**Tested by:** IBM Corporation

**Software Availability:** Oct-2011

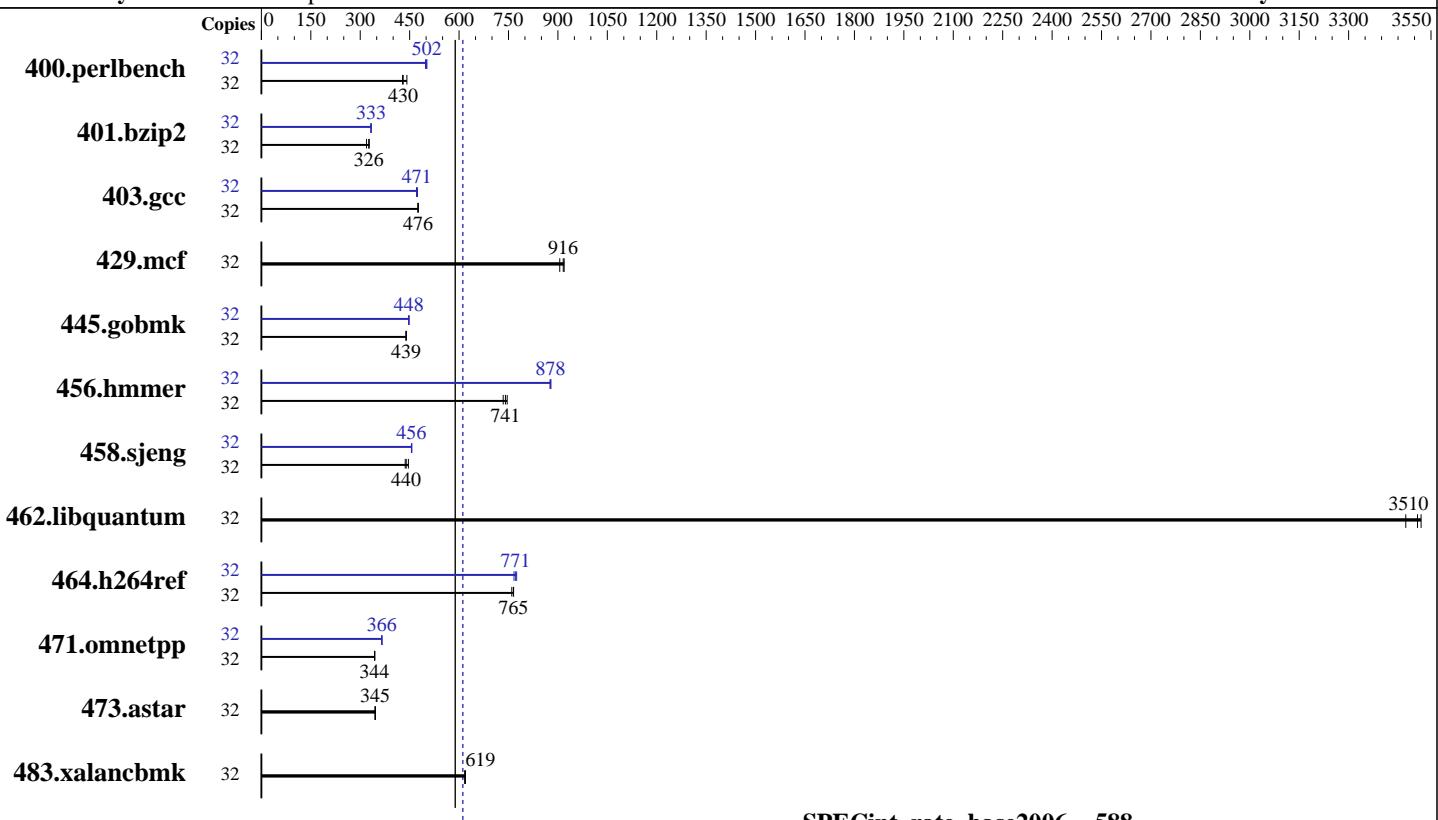

**SPECint\_rate\_base2006 = 588**

**SPECint\_rate2006 = 611**

## Hardware

CPU Name: Intel Xeon E5-2665  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx8 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 Compiler: 2.6.32-131.0.15.el6.x86\_64  
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 611**

**IBM System x3500 M4 (Intel Xeon E5-2665)**

**SPECint\_rate\_base2006 = 588**

**CPU2006 license:** 11

**Test date:** Apr-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2012

**Tested by:** IBM Corporation

**Software Availability:** Oct-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	708	442	729	429	<b>726</b>	<b>430</b>	32	<b>623</b>	<b>502</b>	623	502	628	498
401.bzip2	32	<b>948</b>	<b>326</b>	943	327	968	319	32	929	332	<b>928</b>	<b>333</b>	926	333
403.gcc	32	<b>542</b>	<b>476</b>	541	476	542	475	32	<b>547</b>	<b>471</b>	<b>546</b>	<b>471</b>	544	474
429.mcf	32	<b>319</b>	<b>916</b>	318	919	322	906	32	<b>319</b>	<b>916</b>	318	919	322	906
445.gobmk	32	<b>764</b>	<b>439</b>	763	440	765	439	32	<b>750</b>	<b>448</b>	750	447	749	448
456.hammer	32	<b>403</b>	<b>741</b>	400	746	407	734	32	<b>340</b>	<b>878</b>	340	879	341	876
458.sjeng	32	<b>881</b>	<b>440</b>	887	436	868	446	32	<b>849</b>	<b>456</b>	848	457	850	455
462.libquantum	32	<b>189</b>	<b>3510</b>	188	3520	191	3470	32	<b>189</b>	<b>3510</b>	188	3520	191	3470
464.h264ref	32	932	760	<b>926</b>	<b>765</b>	925	766	32	914	775	<b>919</b>	<b>771</b>	924	767
471.omnetpp	32	<b>582</b>	<b>344</b>	581	344	582	344	32	<b>547</b>	<b>366</b>	547	366	547	365
473.astar	32	649	346	<b>650</b>	<b>345</b>	651	345	32	649	346	<b>650</b>	<b>345</b>	651	345
483.xalancbmk	32	357	619	<b>357</b>	<b>619</b>	358	617	32	357	619	<b>357</b>	<b>619</b>	358	617

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS Settings:

Operating Mode set to Maximum Performance  
Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on x3500M4 Mon Apr 9 17:43:19 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2665 0 @ 2.40GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 611

IBM System x3500 M4 (Intel Xeon E5-2665)

SPECint\_rate\_base2006 = 588

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:       66044804 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3500M4 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 9 17:14
```

```
SPEC is set to: /root/SPECcpu-v1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3500m4-lv_root
                  ext4   210G   69G   130G   35%  /
```

Additional information from dmidecode:

```
Memory:
16x Samsung M393B5273DH0-CK0 4 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 611**

IBM System x3500 M4 (Intel Xeon E5-2665)

**SPECint\_rate\_base2006 = 588**

CPU2006 license: 11

**Test date:** Apr-2012

Test sponsor: IBM Corporation

**Hardware Availability:** Mar-2012

Tested by: IBM Corporation

**Software Availability:** Oct-2011

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 611

IBM System x3500 M4 (Intel Xeon E5-2665)

SPECint\_rate\_base2006 = 588

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 611**

IBM System x3500 M4 (Intel Xeon E5-2665)

**SPECint\_rate\_base2006 = 588**

CPU2006 license: 11

**Test date:** Apr-2012

Test sponsor: IBM Corporation

**Hardware Availability:** Mar-2012

Tested by: IBM Corporation

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:03:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.