



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017R-WRF (X9DRW-iF, Intel Xeon E5-2650L)

SPECfp[®]_rate2006 = 379

SPECfp_rate_base2006 = 371

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

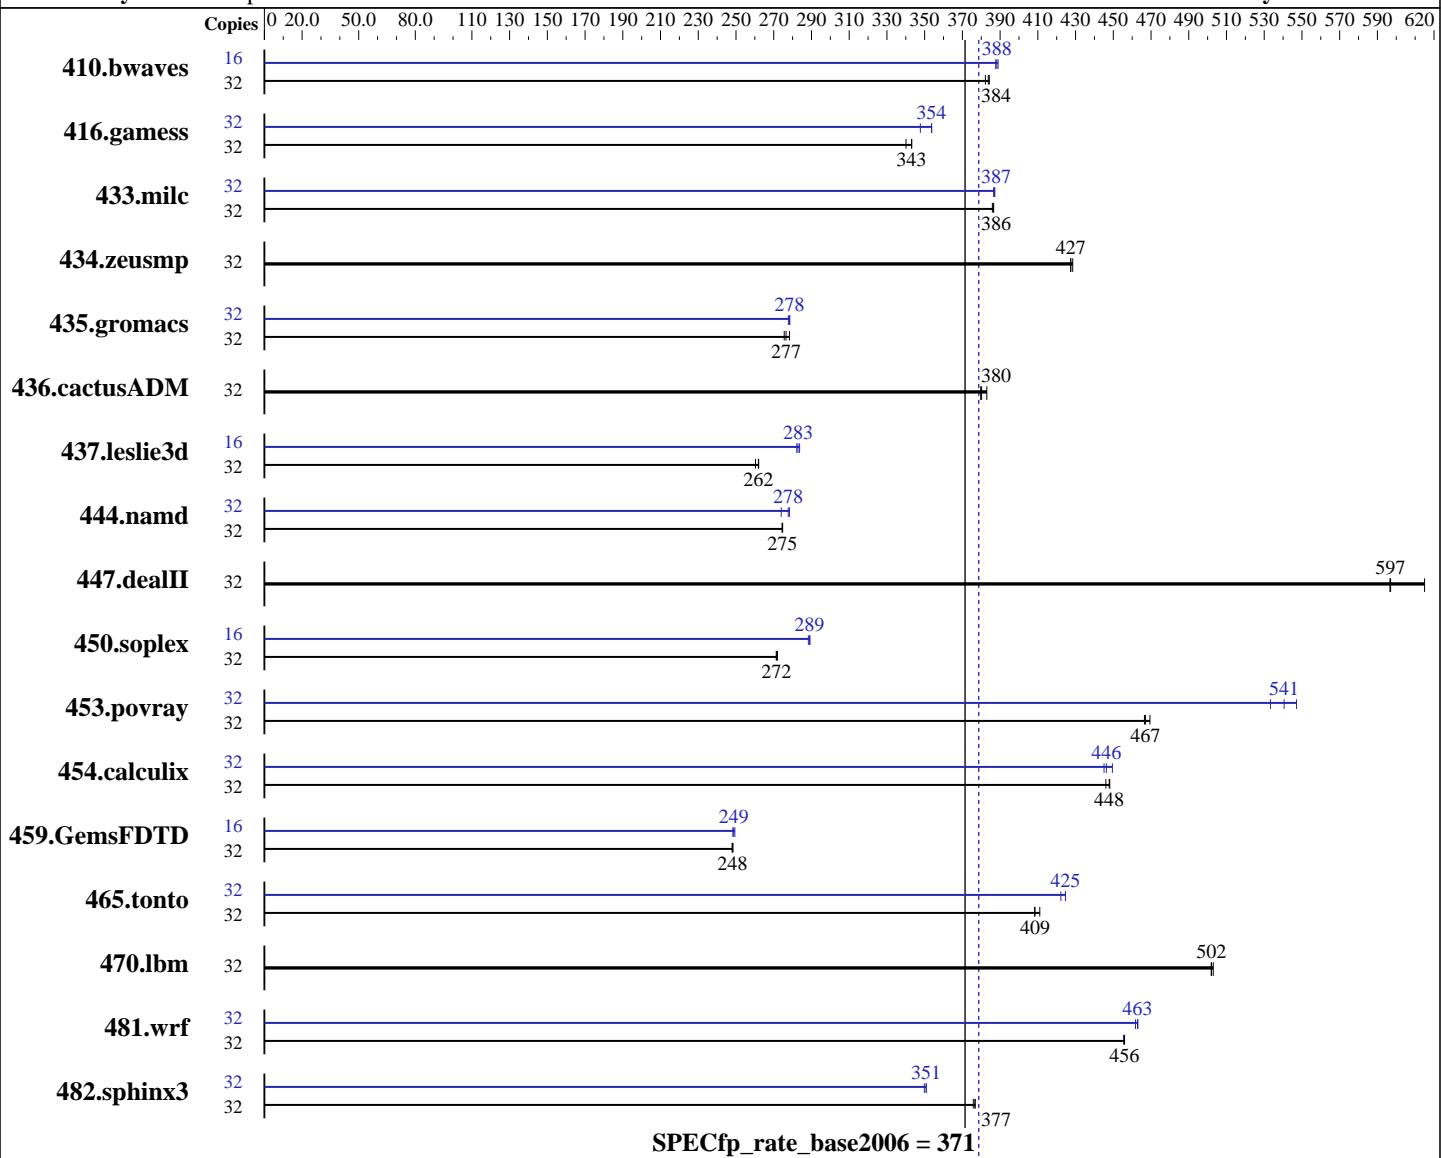

Hardware

CPU Name: Intel Xeon E5-2650L
CPU Characteristics: Intel Turbo Boost Technology up to 2.30 GHz
CPU MHz: 1800
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017R-WRF (X9DRW-iF, Intel Xeon E5-2650L)

SPECfp_rate2006 = 379

SPECfp_rate_base2006 = 371

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA III, 7200 RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1132	384	1138	382	1133	384	16	560	388	559	389	561	388
416.gamess	32	1842	340	1826	343	1826	343	32	1771	354	1772	354	1802	348
433.milc	32	760	386	761	386	760	387	32	759	387	759	387	760	387
434.zeusmp	32	680	428	681	427	681	427	32	680	428	681	427	681	427
435.gromacs	32	826	277	829	276	821	278	32	823	278	821	278	820	279
436.cactusADM	32	1006	380	1007	380	999	383	32	1006	380	1007	380	999	383
437.leslie3d	32	1148	262	1149	262	1155	260	16	530	284	533	282	532	283
444.namd	32	934	275	934	275	935	274	32	924	278	922	278	937	274
447.dealII	32	614	597	613	597	595	615	32	614	597	613	597	595	615
450.soplex	32	981	272	984	271	983	272	16	462	289	461	289	463	288
453.povray	32	364	467	365	467	363	469	32	311	547	315	541	319	533
454.calculix	32	589	448	592	446	590	448	32	587	450	592	446	593	445
459.GemsFDTD	32	1369	248	1367	248	1368	248	16	681	249	684	248	682	249
465.tonto	32	766	411	771	408	771	409	32	741	425	746	422	742	425
470.lbm	32	874	503	876	502	876	502	32	874	503	876	502	876	502
481.wrf	32	784	456	785	456	784	456	32	774	462	772	463	772	463
482.sphinx3	32	1660	376	1656	377	1655	377	32	1778	351	1783	350	1778	351

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017R-WRF (X9DRW-iF, Intel Xeon E5-2650L)

SPECfp_rate2006 = 379

SPECfp_rate_base2006 = 371

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017R-WRF (X9DRW-iF, Intel Xeon E5-2650L)

SPECfp_rate2006 = 379

SPECfp_rate_base2006 = 371

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3:

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex:

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves:

```
-DSPEC_CPU_LP64
```


416.gamess:

```
-DSPEC_CPU_LP64
```


433.milc:

```
-DSPEC_CPU_LP64
```


434.zeusmp:

```
-DSPEC_CPU_LP64
```


435.gromacs:

```
-DSPEC_CPU_LP64 -nofor_main
```


436.cactusADM:

```
-DSPEC_CPU_LP64 -nofor_main
```


437.leslie3d:

```
-DSPEC_CPU_LP64
```


444.namd:

```
-DSPEC_CPU_LP64
```


447.dealII:

```
-DSPEC_CPU_LP64
```


453.povray:

```
-DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017R-WRF (X9DRW-iF, Intel Xeon E5-2650L)

SPECfp_rate2006 = 379

SPECfp_rate_base2006 = 371

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017R-WRF (X9DRW-iF, Intel Xeon E5-2650L)

SPECfp_rate2006 = 379

SPECfp_rate_base2006 = 371

CPU2006 license: 001176

Test date: Apr-2012

Test sponsor: Supermicro

Hardware Availability: Mar-2012

Tested by: Supermicro

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:08:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.