



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp®\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

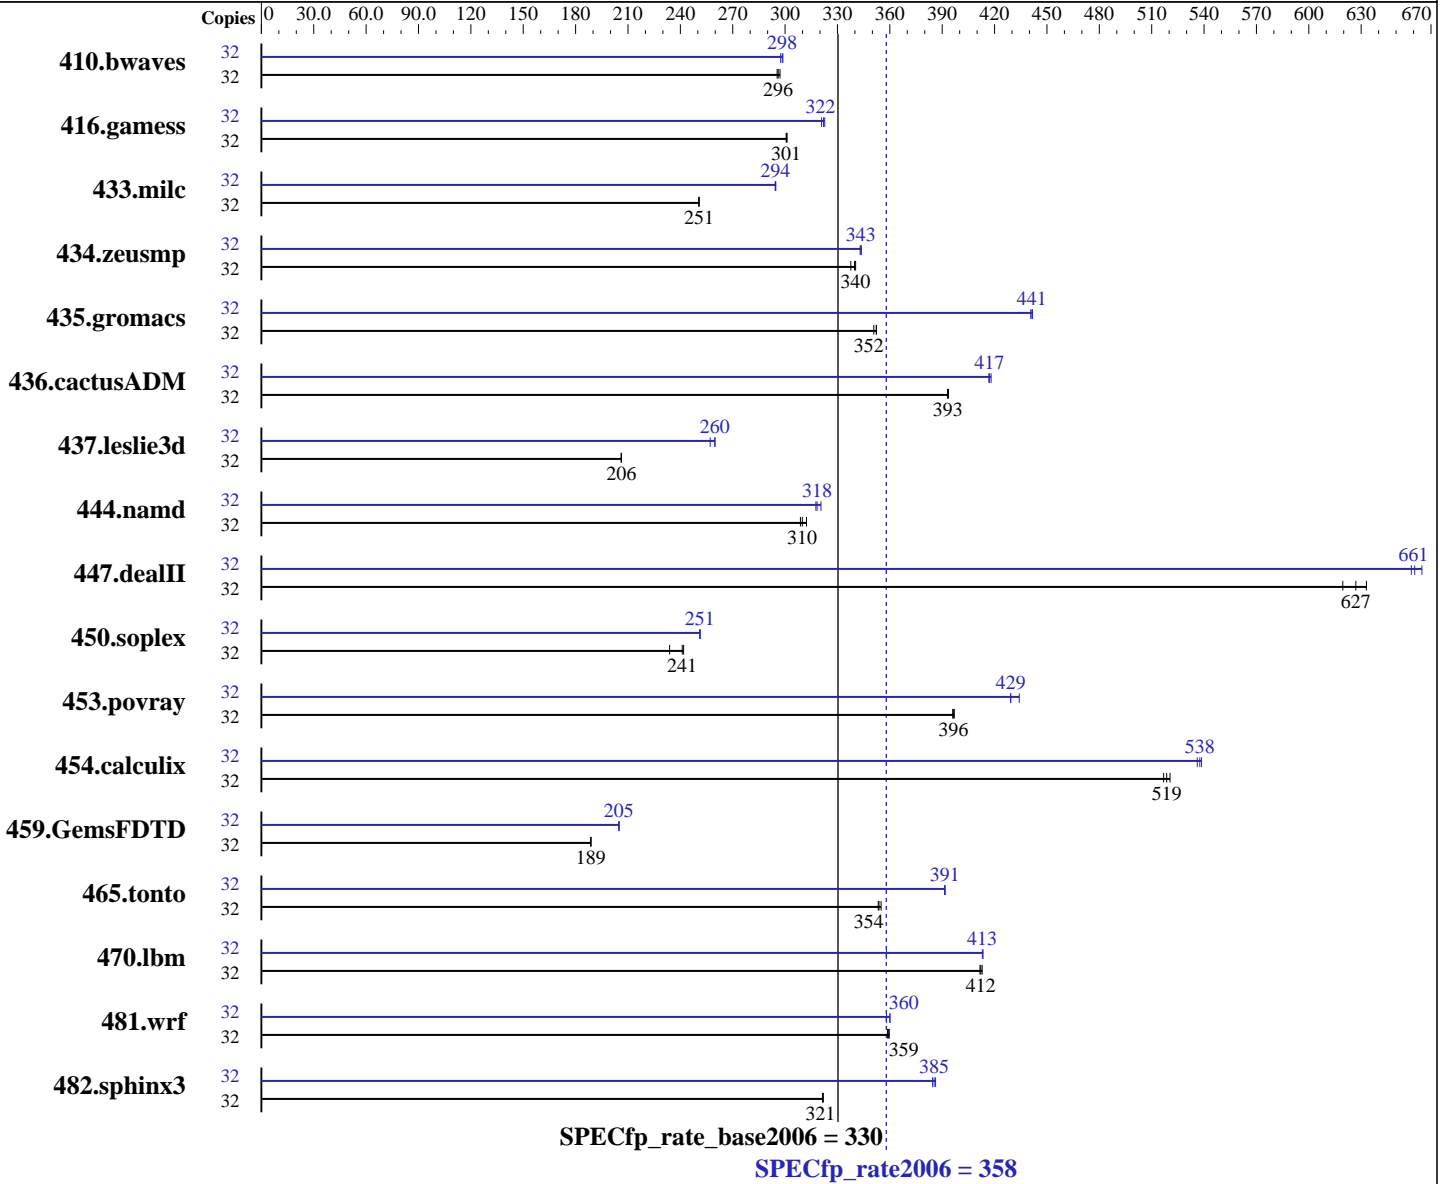

### Hardware

CPU Name: AMD Opteron 6276  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 500 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	1464	297	<u>1469</u>	<u>296</u>	1472	295	32	1462	297	<u>1458</u>	<u>298</u>	1456	299		
416.gamess	32	2084	301	<u>2084</u>	<u>301</u>	2080	301	32	<u>1946</u>	<u>322</u>	1942	323	1952	321		
433.milc	32	1172	251	<u>1172</u>	<u>251</u>	1172	251	32	<u>998</u>	<u>294</u>	998	294	997	295		
434.zeusmp	32	<u>857</u>	<u>340</u>	855	340	862	338	32	847	344	<u>848</u>	<u>343</u>	849	343		
435.gromacs	32	648	352	651	351	<u>649</u>	<u>352</u>	32	518	441	517	442	<u>518</u>	<u>441</u>		
436.cactusADM	32	<u>973</u>	<u>393</u>	972	394	973	393	32	<u>917</u>	<u>417</u>	918	417	915	418		
437.leslie3d	32	1460	206	1458	206	<u>1458</u>	<u>206</u>	32	1170	257	1157	260	<u>1158</u>	<u>260</u>		
444.namd	32	<u>828</u>	<u>310</u>	822	312	831	309	32	<u>806</u>	<u>318</u>	808	318	801	321		
447.dealII	32	578	633	<u>584</u>	<u>627</u>	591	619	32	<u>554</u>	<u>661</u>	551	665	556	659		
450.soplex	32	1141	234	<u>1107</u>	<u>241</u>	1103	242	32	<u>1062</u>	<u>251</u>	1062	251	1062	251		
453.povray	32	430	396	429	397	<u>429</u>	<u>396</u>	32	<u>397</u>	<u>429</u>	392	434	397	429		
454.calculix	32	<u>509</u>	<u>519</u>	507	520	511	517	32	492	536	490	539	<u>491</u>	<u>538</u>		
459.GemsFDTD	32	1799	189	<u>1799</u>	<u>189</u>	1799	189	32	1657	205	<u>1657</u>	<u>205</u>	1658	205		
465.tonto	32	<u>890</u>	<u>354</u>	891	353	887	355	32	804	392	<u>804</u>	<u>391</u>	805	391		
470.lbm	32	1068	412	1065	413	<u>1067</u>	<u>412</u>	32	1064	413	1228	358	<u>1065</u>	<u>413</u>		
481.wrf	32	997	359	994	360	<u>995</u>	<u>359</u>	32	993	360	<u>993</u>	<u>360</u>	998	358		
482.sphinx3	32	1940	321	<u>1940</u>	<u>321</u>	1937	322	32	1615	386	<u>1618</u>	<u>385</u>	1622	384		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2012  
Hardware Availability: Nov-2011  
Software Availability: Dec-2011

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## Platform Notes

Fan speed set to Full Speed in BIOS setup.  
PowerNow and C1E set to disabled in BIOS setup.

## General Notes

As tested, the system used a Supermicro H8DGU-F motherboard.  
Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/home/spec/amd1104-rate-libs-revC/32:/home/spec/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Base Portability Flags (Continued)

```

447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
      -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

```

C++ benchmarks:

```

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

```

Fortran benchmarks:

```

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

```

Benchmarks using both Fortran and C:

```

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

```

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2012  
Hardware Availability: Nov-2011  
Software Availability: Dec-2011

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealIII (continued):

-TENV:frame\_pointer=off

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:ignore\_feedback=off

-INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE\_arith=3

-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on

-fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m

-WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off

-CG:p2align=0 -CG:p2align\_split=on -CG:dsched=on

-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2

-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on

-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4

-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on

-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0

-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1

-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off

-IPA:plimit=1500 -HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0

-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll\_size=0

-LNO:fission=2 -CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias

-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525

-HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)

-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2

-HP:bdt=2m:heap=2m -CG:local\_sched\_alg=2 -GRA:unspill=ON

-CG:load\_exe=3 -LNO:simd=3

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server, 1022G-URF  
AMD Opteron 6276

SPECfp\_rate2006 = 358

SPECfp\_rate\_base2006 = 330

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-CG:dsched=on -WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

<http://www.spec.org/cpu2006/flags/smci-amd-platform-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>

<http://www.spec.org/cpu2006/flags/smci-amd-platform-rate-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:10:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 May 2012.