



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

SPECfp<sup>®</sup>2006 = 47.0

SPECfp\_base2006 = 41.3

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

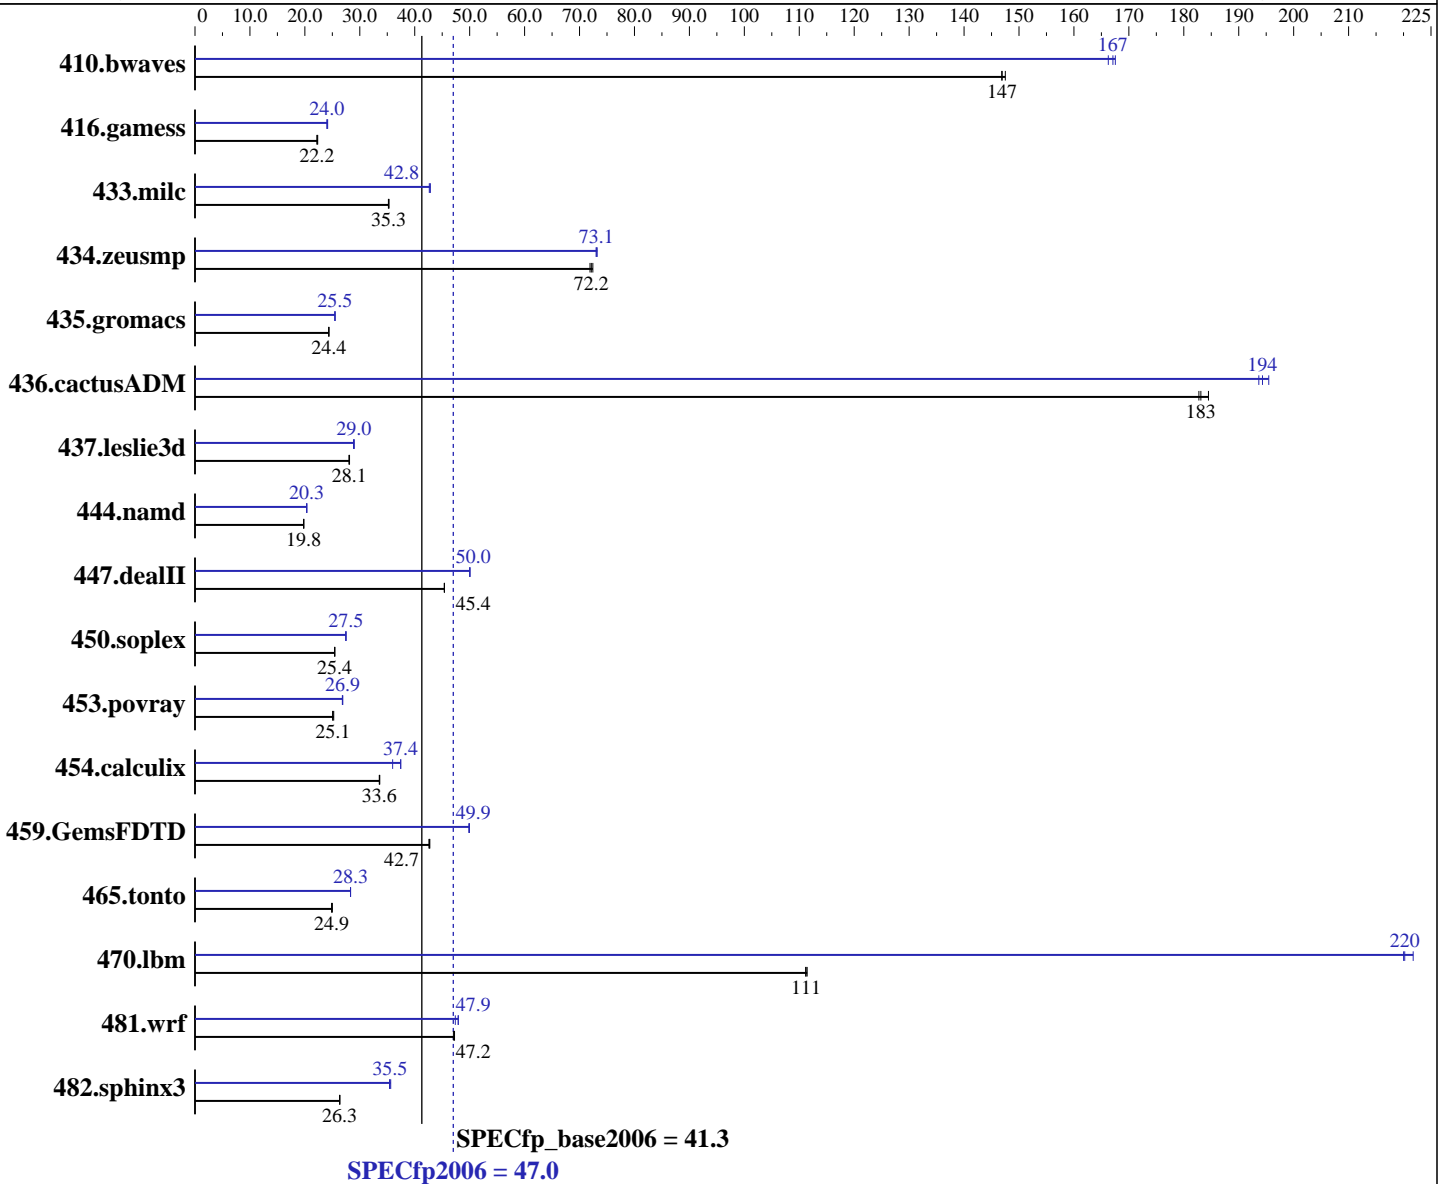

## Hardware

CPU Name: AMD Opteron 4240  
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

**SPECfp2006 = 47.0**

**SPECfp\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

**Primary Cache:** 192 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

**Secondary Cache:** 6 MB I+D on chip per chip, 2 MB shared / 2 cores

**L3 Cache:** 8 MB I+D on chip per chip

**Other Cache:** None

**Memory:** 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)

**Disk Subsystem:** 1 x 128 GB SATA, 7200 RPM

**Other Hardware:** None

**Other Software:** None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	92.1	148	<b><u>92.5</u></b>	<b><u>147</u></b>	92.5	147	<b><u>81.3</u></b>	<b><u>167</u></b>	81.1	168	81.7	166
416.gamess	882	22.2	877	22.3	<b><u>881</u></b>	<b><u>22.2</u></b>	811	24.1	<b><u>814</u></b>	<b><u>24.0</u></b>	815	24.0
433.milc	<b><u>260</u></b>	<b><u>35.3</u></b>	260	35.3	261	35.2	<b><u>215</u></b>	<b><u>42.8</u></b>	214	42.8	215	42.6
434.zeusmp	126	72.4	<b><u>126</u></b>	<b><u>72.2</u></b>	127	71.9	124	73.2	125	73.0	<b><u>125</u></b>	<b><u>73.1</u></b>
435.gromacs	293	24.3	293	24.4	<b><u>293</u></b>	<b><u>24.4</u></b>	281	25.5	<b><u>280</u></b>	<b><u>25.5</u></b>	280	25.5
436.cactusADM	65.4	183	<b><u>65.3</u></b>	<b><u>183</u></b>	64.8	184	61.7	194	61.1	195	<b><u>61.5</u></b>	<b><u>194</u></b>
437.leslie3d	334	28.1	335	28.0	<b><u>335</u></b>	<b><u>28.1</u></b>	326	28.9	324	29.0	<b><u>325</u></b>	<b><u>29.0</u></b>
444.namd	405	19.8	406	19.8	<b><u>405</u></b>	<b><u>19.8</u></b>	395	20.3	394	20.4	<b><u>394</u></b>	<b><u>20.3</u></b>
447.dealII	252	45.4	<b><u>252</u></b>	<b><u>45.4</u></b>	252	45.4	229	50.0	229	50.0	<b><u>229</u></b>	<b><u>50.0</u></b>
450.soplex	328	25.5	<b><u>328</u></b>	<b><u>25.4</u></b>	328	25.4	<b><u>303</u></b>	<b><u>27.5</u></b>	304	27.4	303	27.5
453.povray	<b><u>212</u></b>	<b><u>25.1</u></b>	212	25.1	211	25.3	198	26.8	198	26.9	<b><u>198</u></b>	<b><u>26.9</u></b>
454.calculix	246	33.5	245	33.6	<b><u>246</u></b>	<b><u>33.6</u></b>	<b><u>220</u></b>	<b><u>37.4</u></b>	220	37.5	229	36.0
459.GemsFDTD	249	42.6	248	42.7	<b><u>249</u></b>	<b><u>42.7</u></b>	<b><u>212</u></b>	<b><u>49.9</u></b>	213	49.9	212	50.0
465.tonto	<b><u>395</u></b>	<b><u>24.9</u></b>	393	25.0	395	24.9	348	28.3	347	28.3	<b><u>348</u></b>	<b><u>28.3</u></b>
470.lbm	124	111	<b><u>124</u></b>	<b><u>111</u></b>	123	111	62.0	222	<b><u>62.4</u></b>	<b><u>220</u></b>	62.5	220
481.wrf	<b><u>237</u></b>	<b><u>47.2</u></b>	237	47.0	236	47.2	233	47.9	<b><u>233</u></b>	<b><u>47.9</u></b>	236	47.4
482.sphinx3	739	26.4	741	26.3	<b><u>740</u></b>	<b><u>26.3</u></b>	550	35.4	<b><u>549</u></b>	<b><u>35.5</u></b>	547	35.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

**SPECfp2006 = 47.0**

**SPECfp\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Operating System Notes (Continued)

cpuspeed stop was used to set the CPU frequency to its maximum.

```
Set vm/nr_hugepages=2000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "2000"
```

```
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"
```

```
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11"
```

```
O64_OMP_SPIN_COUNT = "800000"
```

```
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

**SPECfp2006 = 47.0**

**SPECfp\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Base Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso  
 -OPT:alias=restricted -OPT:malloc\_alg=2 -LNO:parallel\_overhead=10000

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -CG:p2align=0  
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:fusion\_peeling\_limit=0  
 -LNO:parallel\_overhead=10000 -OPT:rsqrt=2 -OPT:unroll\_size=256  
 -HP:bdt=2m:heap=2m -apo

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso  
 -OPT:alias=restricted -OPT:malloc\_alg=2 -LNO:parallel\_overhead=10000  
 -LNO:blocking=off -LNO:fusion\_peeling\_limit=0 -OPT:rsqrt=2  
 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

**SPECfp2006 = 47.0**

**SPECfp\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive

470.lbm: -march=bdver1 -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -CG:use_incdec=off
-INLINE:aggressive=on -WOPT:sib=on -HP

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -LNO:simd=0 -D__OPEN64_FAST_SET
-static -INLINE:aggressive=on -OPT:alias=disjoint
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

**SPECfp2006 = 47.0**

**SPECfp\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
-m32 -HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -OPT:Ofast  
-OPT:treeheight=on -LNO:blocking=off -LNO:prefetch=2  
-LNO:pf2=0 -LNO:prefetch\_ahead=3 -LNO:ignore\_feedback=off  
-LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -CG:cmp\_peep=on -CG:p2align=0

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -apo -LNO:blocking=off  
-LNO:interchange=off -LNO:fusion\_peeling\_limit=0  
-OPT:treeheight=on -OPT:unroll\_size=256 -CG:cmp\_peep=on  
-CG:compute\_to=on -GRA:prioritize\_by\_density=on  
-HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -LNO:prefetch=2 -LNO:blocking=off  
-CG:interior\_ptrs=on -OPT:unroll\_size=256  
-GRA:prioritize\_by\_density=on -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP -apo

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -CG:local\_sched\_alg=1  
-IPA:plimit=525 -HP

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

Tyan YR190-B8228,  
AMD Opteron 4240

**SPECfp2006 = 47.0**

**SPECfp\_base2006 = 41.3**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP:bdt=2m:heap=2m -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -WOPT:sib=on -apo

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -OPT:unroll\_size=256 -LNO:blocking=off  
-LANG:copyinout=off -IPA:callee\_limit=5000  
-GRA:prioritize\_by\_density=on -CG:load\_exe=1 -HP  
-WOPT:sib=on -apo

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 04:31:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 June 2012.