



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint<sup>®</sup>\_rate2006 = 175

ProLiant DL380p Gen8  
(1.80 GHz, Intel Xeon E5-2603)

SPECint\_rate\_base2006 = 168

CPU2006 license: 3


Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

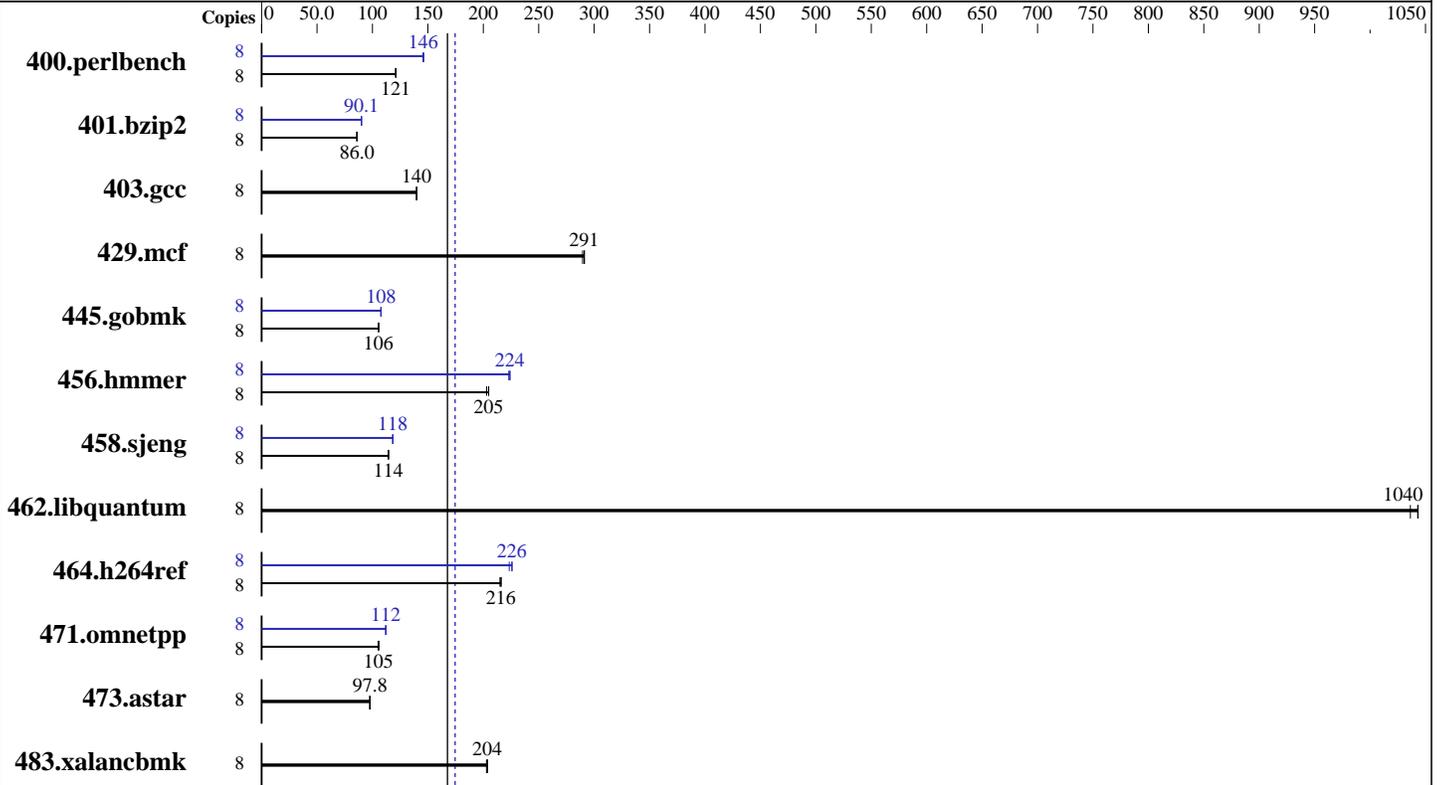

SPECint\_rate\_base2006 = 168

SPECint\_rate2006 = 175

### Hardware

CPU Name: Intel Xeon E5-2603  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 2 x 146 GB 15 K SAS, RAID 1  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01  
 HP Array Configuration Utility, CLI version



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 175

ProLiant DL380p Gen8  
(1.80 GHz, Intel Xeon E5-2603)

SPECint\_rate\_base2006 = 168

CPU2006 license: 3

Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	645	121	647	121	<b>646</b>	<b>121</b>	8	534	146	<b>536</b>	<b>146</b>	537	146
401.bzip2	8	899	85.9	<b>898</b>	<b>86.0</b>	897	86.0	8	857	90.0	856	90.2	<b>857</b>	<b>90.1</b>
403.gcc	8	<b>461</b>	<b>140</b>	461	140	460	140	8	<b>461</b>	<b>140</b>	461	140	460	140
429.mcf	8	252	290	<b>251</b>	<b>291</b>	250	291	8	252	290	<b>251</b>	<b>291</b>	250	291
445.gobmk	8	794	106	795	105	<b>795</b>	<b>106</b>	8	779	108	780	108	<b>779</b>	<b>108</b>
456.hammer	8	<b>365</b>	<b>205</b>	368	203	364	205	8	335	223	333	224	<b>333</b>	<b>224</b>
458.sjeng	8	846	114	<b>846</b>	<b>114</b>	846	114	8	818	118	818	118	<b>818</b>	<b>118</b>
462.libquantum	8	159	1040	<b>159</b>	<b>1040</b>	160	1040	8	159	1040	<b>159</b>	<b>1040</b>	160	1040
464.h264ref	8	823	215	819	216	<b>820</b>	<b>216</b>	8	783	226	793	223	<b>784</b>	<b>226</b>
471.omnetpp	8	<b>474</b>	<b>105</b>	476	105	472	106	8	<b>446</b>	<b>112</b>	447	112	446	112
473.astar	8	576	97.6	<b>574</b>	<b>97.8</b>	574	97.8	8	576	97.6	<b>574</b>	<b>97.8</b>	574	97.8
483.xalancbmk	8	271	204	<b>271</b>	<b>204</b>	272	203	8	271	204	<b>271</b>	<b>204</b>	272	203

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version  
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
Energy/Performance Bias is set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on DL380G8-3 Tue Jul 31 16:26:36 2012  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 175

ProLiant DL380p Gen8  
(1.80 GHz, Intel Xeon E5-2603)

SPECint\_rate\_base2006 = 168

CPU2006 license: 3

Test date: Jul-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 4
siblings       : 4
physical 0:    : cores 0 1 2 3
physical 1:    : cores 0 1 2 3
cache size     : 10240 KB
```

From /proc/meminfo

```
MemTotal:      132260288 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux DL380G8-3 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 31 16:25

SPEC is set to: /cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        ext4      133G  7.8G  118G   7% /
```

Additional information from dmidecode:

BIOS HP P70 02/21/2012

Memory:

16x Not Specified Not Specified 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 175**

ProLiant DL380p Gen8  
(1.80 GHz, Intel Xeon E5-2603)

**SPECint\_rate\_base2006 = 168**

**CPU2006 license:** 3

**Test date:** Jul-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2012

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

Binaries compiled on a system with 2x Xeon E5-2667 CPU + 256GB  
memory using SLES11SP2RC3

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/spec/libs2/32 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 175**

ProLiant DL380p Gen8  
(1.80 GHz, Intel Xeon E5-2603)

**SPECint\_rate\_base2006 = 168**

**CPU2006 license:** 3

**Test date:** Jul-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2012

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 175**

ProLiant DL380p Gen8  
(1.80 GHz, Intel Xeon E5-2603)

**SPECint\_rate\_base2006 = 168**

**CPU2006 license:** 3

**Test date:** Jul-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/spec/libs2/32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120523.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120523.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:58:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2012.