



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 199

IBM System x3250 M4 (Intel Xeon E3-1280 v2)

SPECint\_rate\_base2006 = 191

CPU2006 license: 11


Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

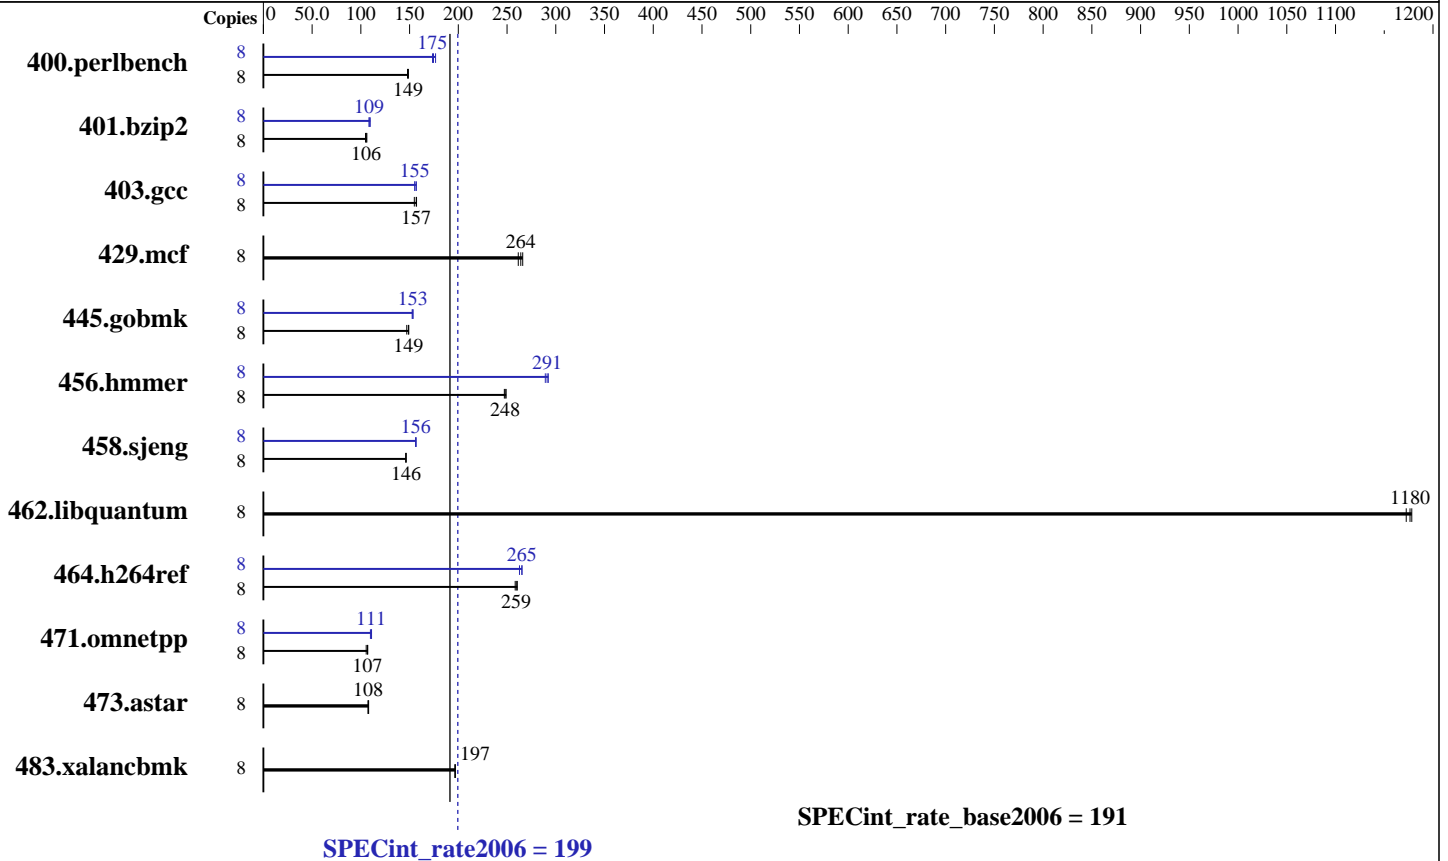

### Hardware

CPU Name: Intel Xeon E3-1280 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint\_rate2006 = 199

IBM System x3250 M4 (Intel Xeon E3-1280 v2)

SPECint\_rate\_base2006 = 191

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	525	149	529	148	<u>526</u>	<u>149</u>	8	450	174	<u>448</u>	<u>175</u>	442	177
401.bzip2	8	<u>731</u>	<u>106</u>	727	106	737	105	8	704	110	<u>711</u>	<u>109</u>	712	108
403.gcc	8	410	157	<u>411</u>	<u>157</u>	416	155	8	414	155	410	157	<u>414</u>	<u>155</u>
429.mcf	8	279	262	274	266	<u>276</u>	<u>264</u>	8	279	262	274	266	<u>276</u>	<u>264</u>
445.gobmk	8	563	149	571	147	<u>564</u>	<u>149</u>	8	547	154	550	153	<u>547</u>	<u>153</u>
456.hammer	8	<u>301</u>	<u>248</u>	302	247	300	249	8	255	292	258	289	<u>256</u>	<u>291</u>
458.sjeng	8	<u>661</u>	<u>146</u>	661	146	663	146	8	620	156	<u>619</u>	<u>156</u>	618	157
462.libquantum	8	<u>141</u>	<u>1180</u>	141	1170	141	1180	8	<u>141</u>	<u>1180</u>	141	1170	141	1180
464.h264ref	8	<u>682</u>	<u>259</u>	685	258	680	261	8	674	263	<u>668</u>	<u>265</u>	667	265
471.omnetpp	8	474	105	<u>468</u>	<u>107</u>	467	107	8	<u>452</u>	<u>111</u>	451	111	455	110
473.astar	8	523	107	520	108	<u>522</u>	<u>108</u>	8	523	107	520	108	<u>522</u>	<u>108</u>
483.xalancbmk	8	<u>281</u>	<u>197</u>	281	197	280	197	8	<u>281</u>	<u>197</u>	281	197	280	197

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Turbo Mode enabled in BIOS

C-State enabled in BIOS

Sysinfo program /root/SPECcpul.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Tue May 8 17:07:50 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1280 V2 @ 3.60GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 199

IBM System x3250 M4 (Intel Xeon E3-1280 v2)

SPECint\_rate\_base2006 = 191

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Platform Notes (Continued)

```

caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

```

```

From /proc/meminfo
MemTotal:      16322724 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 8 14:49

```

SPEC is set to: /root/SPECcpul.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      50G   12G   36G   24% /

```

Additional information from dmidecode:

```

Memory:
2x Micron 18JSF1G72AZ-1G6D1 8 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/SPECcpul.2/libs/32:/root/SPECcpul.2/libs/64"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 199

IBM System x3250 M4 (Intel Xeon E3-1280 v2)

SPECint\_rate\_base2006 = 191

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 199

IBM System x3250 M4 (Intel Xeon E3-1280 v2)

SPECint\_rate\_base2006 = 191

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 199

IBM System x3250 M4 (Intel Xeon E3-1280 v2)

SPECint\_rate\_base2006 = 191

CPU2006 license: 11

Test date: May-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:21:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.