



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp<sup>®</sup>\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019


Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

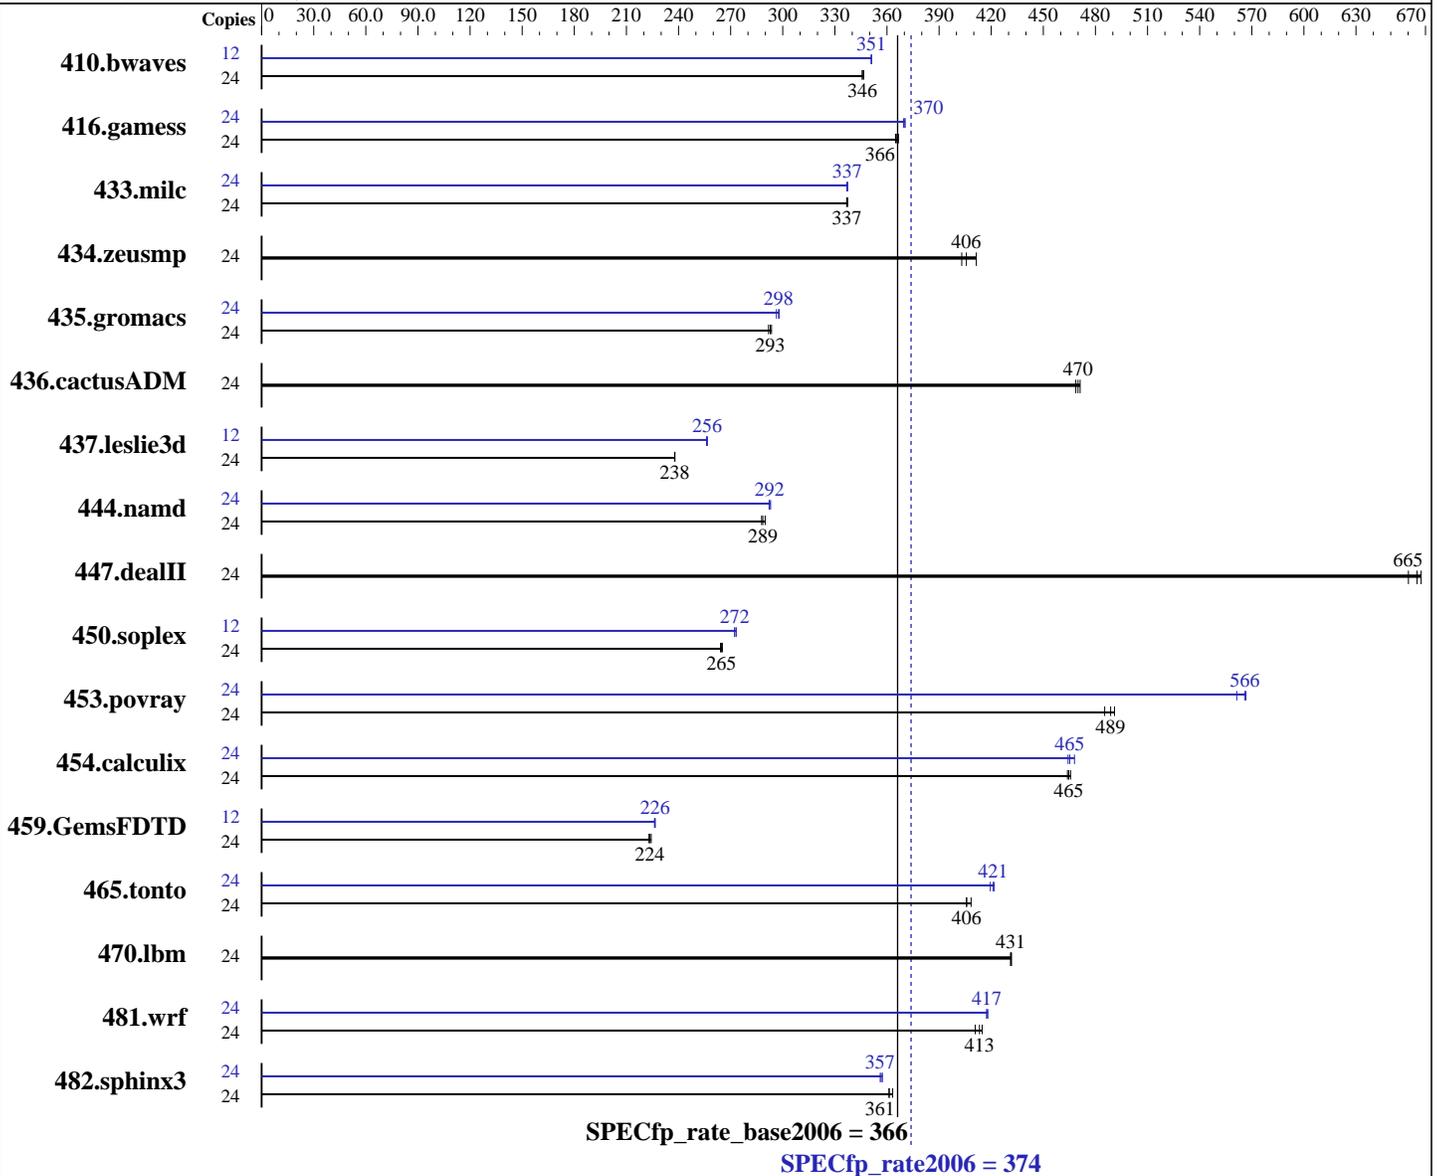

### Hardware

CPU Name: Intel Xeon E5-2640  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)  
 Disk Subsystem: 1 X 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	941	347	<b>943</b>	<b>346</b>	943	346	12	<b>465</b>	<b>351</b>	465	351	465	351
416.gamess	24	1282	367	1288	365	<b>1285</b>	<b>366</b>	24	1272	370	1269	370	<b>1269</b>	<b>370</b>
433.milc	24	653	337	654	337	<b>654</b>	<b>337</b>	24	653	337	<b>654</b>	<b>337</b>	654	337
434.zeusmp	24	542	403	<b>538</b>	<b>406</b>	531	411	24	542	403	<b>538</b>	<b>406</b>	531	411
435.gromacs	24	584	294	587	292	<b>585</b>	<b>293</b>	24	575	298	<b>576</b>	<b>298</b>	578	296
436.cactusADM	24	609	471	612	469	<b>610</b>	<b>470</b>	24	609	471	612	469	<b>610</b>	<b>470</b>
437.leslie3d	24	<b>948</b>	<b>238</b>	948	238	949	238	12	440	257	440	256	<b>440</b>	<b>256</b>
444.namd	24	669	288	<b>667</b>	<b>289</b>	664	290	24	659	292	657	293	<b>658</b>	<b>292</b>
447.dealII	24	411	667	416	660	<b>413</b>	<b>665</b>	24	411	667	416	660	<b>413</b>	<b>665</b>
450.soplex	24	<b>756</b>	<b>265</b>	755	265	758	264	12	<b>367</b>	<b>272</b>	366	273	367	272
453.povray	24	263	485	<b>261</b>	<b>489</b>	260	491	24	225	567	<b>226</b>	<b>566</b>	227	561
454.calculix	24	<b>426</b>	<b>465</b>	427	464	425	466	24	427	464	<b>426</b>	<b>465</b>	423	468
459.GemsFDTD	24	1135	224	1142	223	<b>1139</b>	<b>224</b>	12	<b>562</b>	<b>226</b>	562	227	563	226
465.tonto	24	578	408	<b>582</b>	<b>406</b>	582	406	24	<b>561</b>	<b>421</b>	563	419	560	422
470.lbm	24	764	432	765	431	<b>765</b>	<b>431</b>	24	764	432	765	431	<b>765</b>	<b>431</b>
481.wrf	24	653	411	646	415	<b>649</b>	<b>413</b>	24	641	418	642	417	<b>642</b>	<b>417</b>
482.sphinx3	24	1288	363	<b>1295</b>	<b>361</b>	1295	361	24	1309	357	1314	356	<b>1311</b>	<b>357</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

### Platform Notes

#### BIOS Configuration:

Processor C6 Report set to Disabled

Processor C1E set to Disabled

CPU Performance set to HPC

LV DDR Mode set to Performance-mode

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Wed May 16 11:36:38 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

#### From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2640 0 @ 2.50GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 15360 KB

#### From /proc/meminfo

MemTotal: 132100944 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

#### /usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

#### From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

#### uname -a:

Linux localhost.localdomain 2.6.32-220.el6.x86\_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86\_64 x86\_64 x86\_64 GNU/Linux

#### run-level 3 May 16 11:27

#### SPEC is set to: /opt/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	275G	8.0G	253G	4%	/

#### Additional information from dmidecode:

##### Memory:

16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology = enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
        -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
        -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
        -unroll2

```

### C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
        -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
        -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
        -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
        -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
        -opt-mem-layout-trans=3

```

### Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
        -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
        -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
        -inline-level=0 -scalar-rep- -static

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 374

Cisco UCS B200 M3 (Intel Xeon E5-2640, 2.50 GHz)

SPECfp\_rate\_base2006 = 366

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 05:21:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.