



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 299

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate_base2006 = 291

CPU2006 license: 20


Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

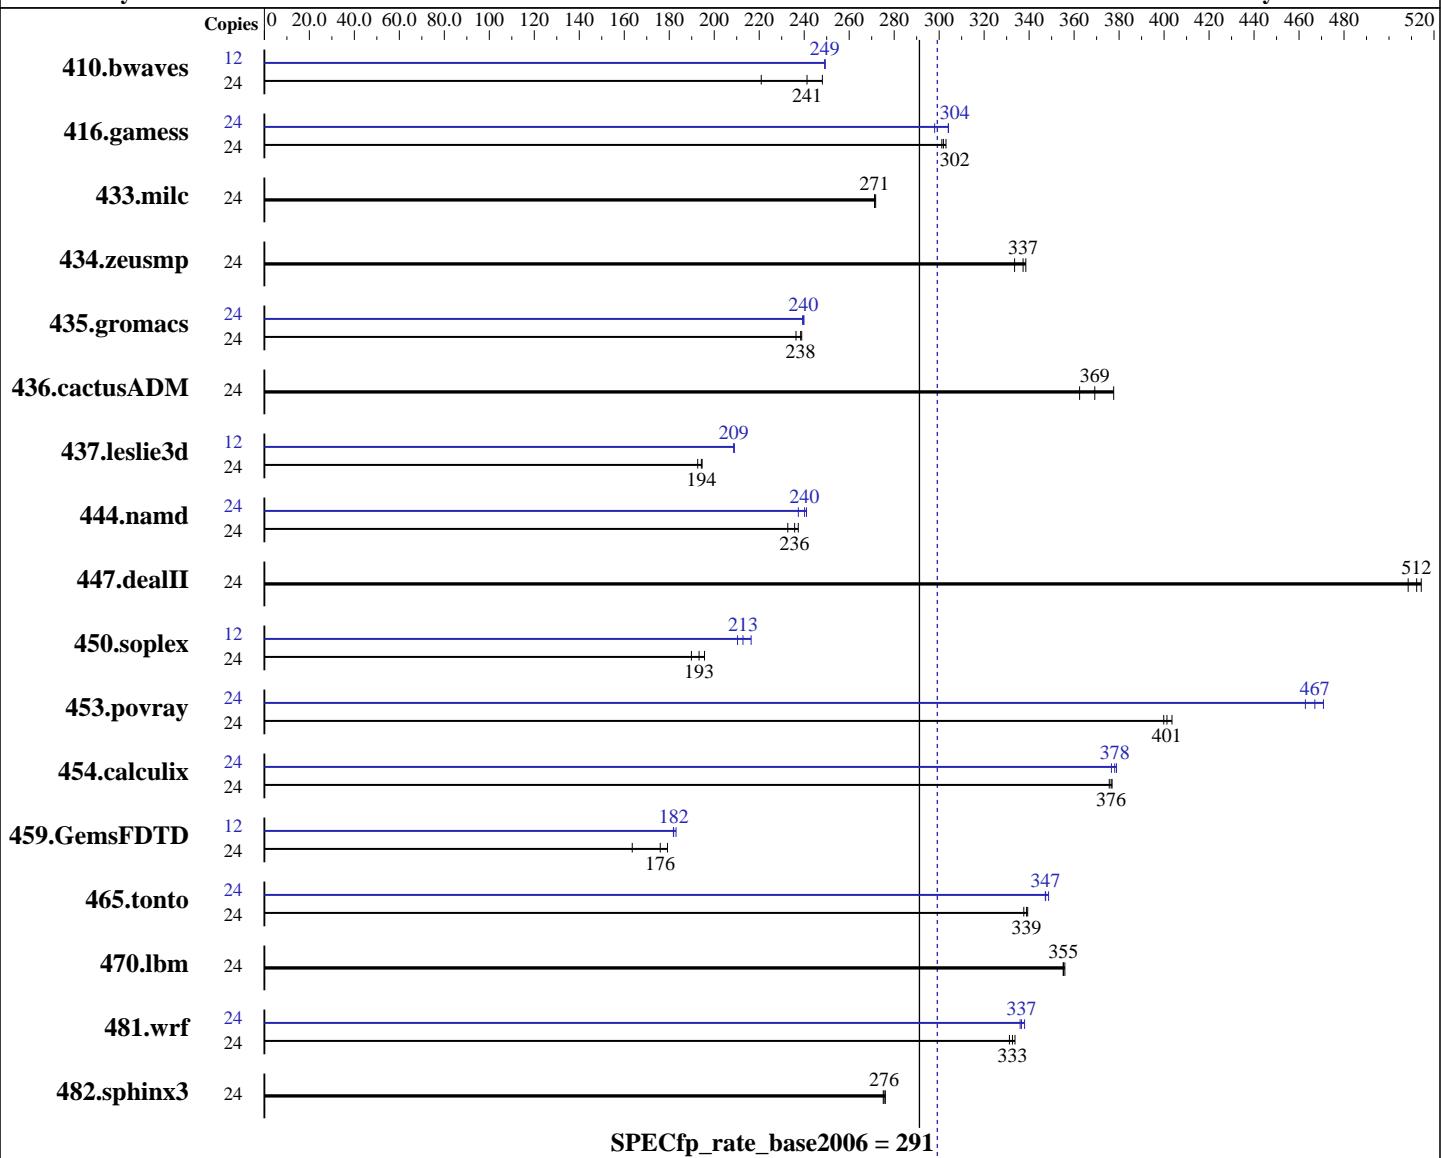

Hardware

CPU Name: Intel Xeon E5-2430L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE
 for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran
 Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (add definition here)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 299

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate_base2006 = 291

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem:	2 x 600 GB 15000 RPM SAS, RAID 1
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1315	248	<u>1352</u>	<u>241</u>	1476	221	12	655	249	654	249	<u>654</u>	<u>249</u>		
416.gamess	24	1560	301	1551	303	<u>1557</u>	<u>302</u>	24	<u>1546</u>	<u>304</u>	1577	298	<u>1545</u>	<u>304</u>		
433.milc	24	811	272	<u>812</u>	<u>271</u>	812	271	24	811	272	<u>812</u>	<u>271</u>	812	271		
434.zeusmp	24	<u>647</u>	<u>337</u>	645	339	655	334	24	<u>647</u>	<u>337</u>	645	339	<u>655</u>	<u>334</u>		
435.gromacs	24	<u>719</u>	<u>238</u>	725	236	717	239	24	<u>715</u>	<u>240</u>	716	239	<u>714</u>	<u>240</u>		
436.cactusADM	24	760	378	<u>777</u>	<u>369</u>	791	362	24	760	378	<u>777</u>	<u>369</u>	<u>791</u>	<u>362</u>		
437.leslie3d	24	1159	195	<u>1161</u>	<u>194</u>	1171	193	12	540	209	540	209	<u>540</u>	<u>209</u>		
444.namd	24	811	237	<u>816</u>	<u>236</u>	827	233	24	811	237	<u>801</u>	<u>240</u>	799	241		
447.dealII	24	534	514	540	509	<u>536</u>	<u>512</u>	24	534	514	540	509	<u>536</u>	<u>512</u>		
450.soplex	24	1054	190	<u>1036</u>	<u>193</u>	1023	196	12	462	216	<u>470</u>	<u>213</u>	476	210		
453.povray	24	319	400	<u>318</u>	<u>401</u>	316	404	24	<u>273</u>	<u>467</u>	276	463	271	471		
454.calculix	24	527	376	525	377	<u>526</u>	<u>376</u>	24	<u>524</u>	<u>378</u>	523	379	<u>526</u>	<u>377</u>		
459.GemsFDTD	24	1421	179	1557	164	<u>1447</u>	<u>176</u>	12	700	182	696	183	<u>700</u>	<u>182</u>		
465.tonto	24	696	339	699	338	<u>697</u>	<u>339</u>	24	680	347	<u>680</u>	<u>347</u>	677	349		
470.lbm	24	929	355	927	356	<u>928</u>	<u>355</u>	24	929	355	927	356	<u>928</u>	<u>355</u>		
481.wrf	24	809	331	<u>806</u>	<u>333</u>	803	334	24	798	336	793	338	<u>796</u>	<u>337</u>		
482.sphinx3	24	1700	275	1694	276	<u>1698</u>	<u>276</u>	24	1700	275	1694	276	<u>1698</u>	<u>276</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost set to Enabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 299

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate_base2006 = 291

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on Slice Sat Feb 25 19:14:10 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2430L 0 @ 2.00GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 15360 KB

From /proc/meminfo

MemTotal: 49381468 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 11 (x86_64)

VERSION = 11

PATCHLEVEL = 2

uname -a:

Linux Slice 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012 (54ddfaf)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 25 04:21 last=S

SPEC is set to: /root/CPU2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext3	266G	32G	221G	13%	/

Additional information from dmidecode:

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate2006 = 299

SPECfp_rate_base2006 = 291

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Dell PowerEdge R420 and

the Bull NovaScale R430 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge R420 model

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate2006 = 299

SPECfp_rate_base2006 = 291

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate2006 = 299

SPECfp_rate_base2006 = 291

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
           -inline-level=0 -scalar-rep- -static
434.zeusmp: basepeak = yes
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R430 F3 (Intel Xeon E5-2430L, 2.00 GHz)

SPECfp_rate2006 = 299

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

SPECfp_rate_base2006 = 291

Peak Optimization Flags (Continued)

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-icl2.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-icl2.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:13:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.