



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp<sup>®</sup>\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019


Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

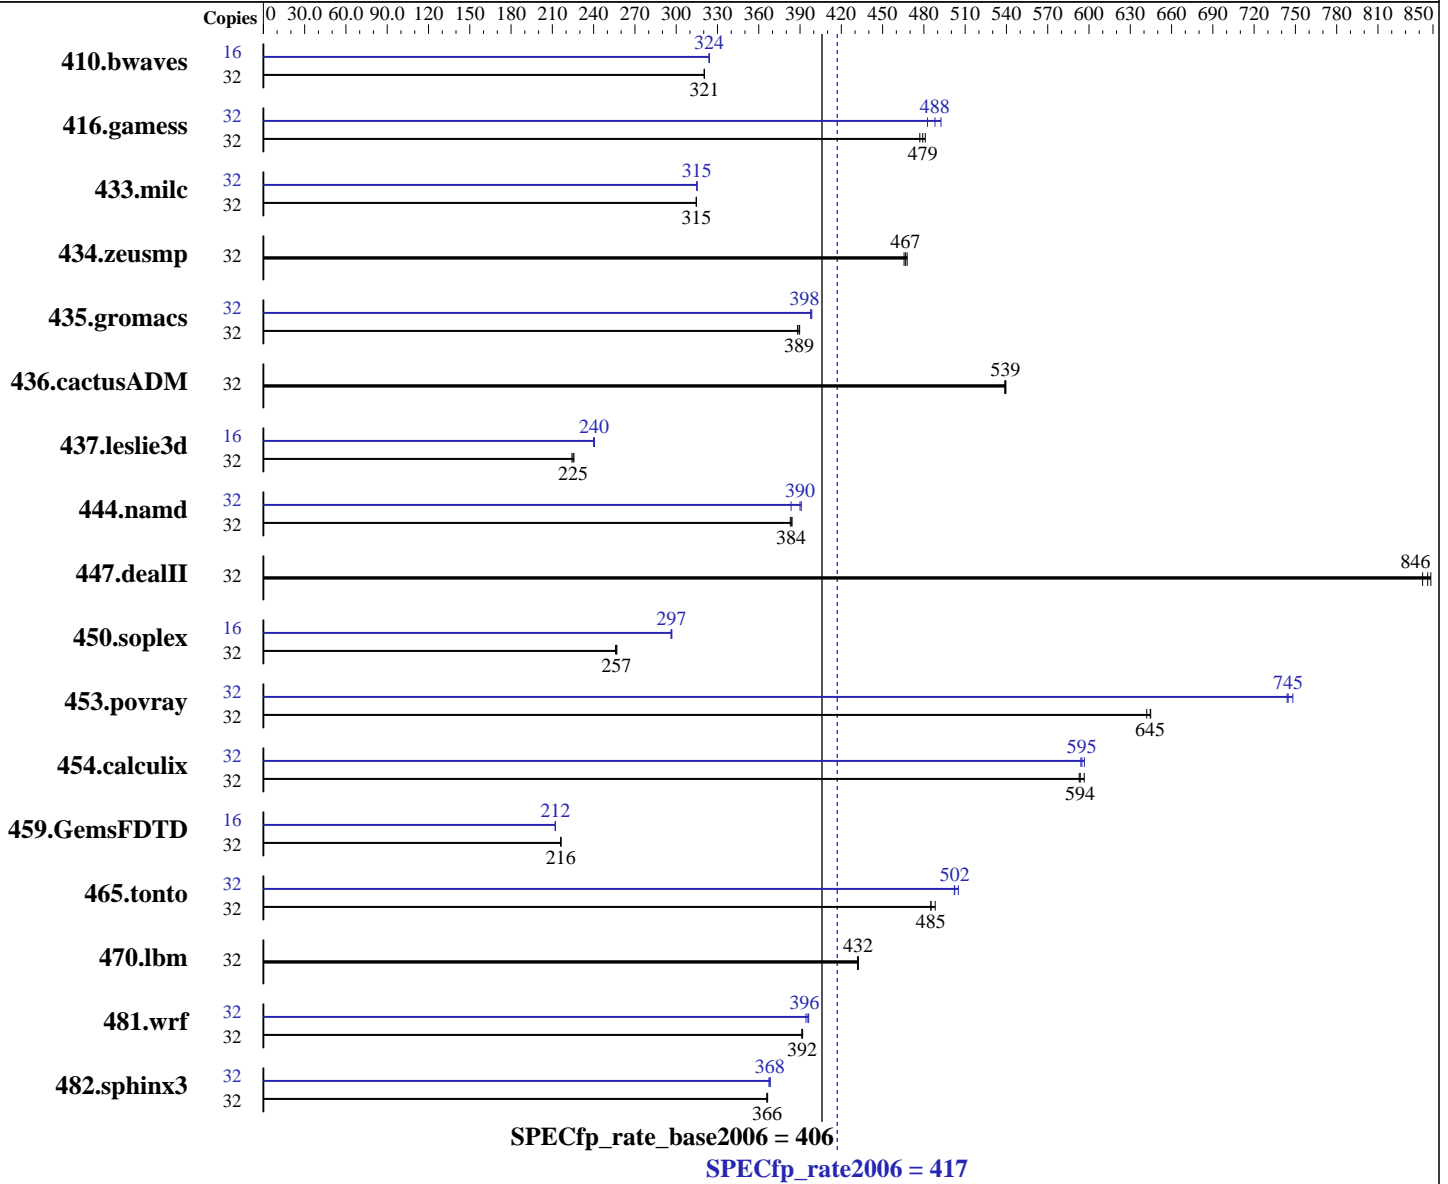

### Hardware

CPU Name: Intel Xeon E5-2470  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 146 GB 15000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1357	321	1358	320	<u>1357</u>	<u>321</u>	16	671	324	671	324	<u>671</u>	<u>324</u>
416.gamess	32	1303	481	<u>1308</u>	<u>479</u>	1313	477	32	1272	492	<u>1284</u>	<u>488</u>	1298	483
433.milc	32	934	315	933	315	<u>934</u>	<u>315</u>	32	932	315	932	315	<u>932</u>	<u>315</u>
434.zeusmp	32	<u>624</u>	<u>467</u>	625	466	622	468	32	<u>624</u>	<u>467</u>	625	466	622	468
435.gromacs	32	589	388	<u>587</u>	<u>389</u>	586	390	32	573	399	<u>574</u>	<u>398</u>	574	398
436.cactusADM	32	<u>709</u>	<u>539</u>	709	540	710	539	32	<u>709</u>	<u>539</u>	709	540	710	539
437.leslie3d	32	1341	224	1333	226	<u>1337</u>	<u>225</u>	16	625	241	<u>626</u>	<u>240</u>	627	240
444.namd	32	<u>669</u>	<u>384</u>	668	384	670	383	32	657	391	669	384	<u>658</u>	<u>390</u>
447.dealII	32	435	842	431	848	<u>433</u>	<u>846</u>	32	435	842	431	848	<u>433</u>	<u>846</u>
450.soplex	32	1043	256	1039	257	<u>1040</u>	<u>257</u>	16	450	296	449	297	<u>450</u>	<u>297</u>
453.povray	32	264	645	<u>264</u>	<u>645</u>	265	642	32	228	748	229	744	<u>229</u>	<u>745</u>
454.calculix	32	443	597	445	593	<u>445</u>	<u>594</u>	32	442	597	444	594	<u>444</u>	<u>595</u>
459.GemsFDTD	32	1570	216	<u>1570</u>	<u>216</u>	1572	216	16	800	212	801	212	<u>800</u>	<u>212</u>
465.tonto	32	649	485	645	488	<u>649</u>	<u>485</u>	32	<u>627</u>	<u>502</u>	623	505	627	502
470.lbm	32	<u>1017</u>	<u>432</u>	1017	432	1018	432	32	<u>1017</u>	<u>432</u>	1017	432	1018	432
481.wrf	32	912	392	<u>913</u>	<u>392</u>	913	391	32	<u>903</u>	<u>396</u>	902	396	906	394
482.sphinx3	32	<u>1703</u>	<u>366</u>	1702	366	1705	366	32	1693	368	<u>1694</u>	<u>368</u>	1698	367

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Thu May 24 18:46:59 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2470 0 @ 2.30GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
 cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      99039988 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 24 18:38

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      134G  9.9G  118G   8% /

```

Additional information from dmidecode:

```

Memory:
12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology = disable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static  
 -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
 -opt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 417

Cisco UCS C22 M3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_rate\_base2006 = 406

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:48:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 June 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7