



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp<sup>®</sup>2006 = **66.3**

### Express5800/T120d (Intel Xeon E5-2430)

SPECfp\_base2006 = **63.8**

CPU2006 license: 9006


Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

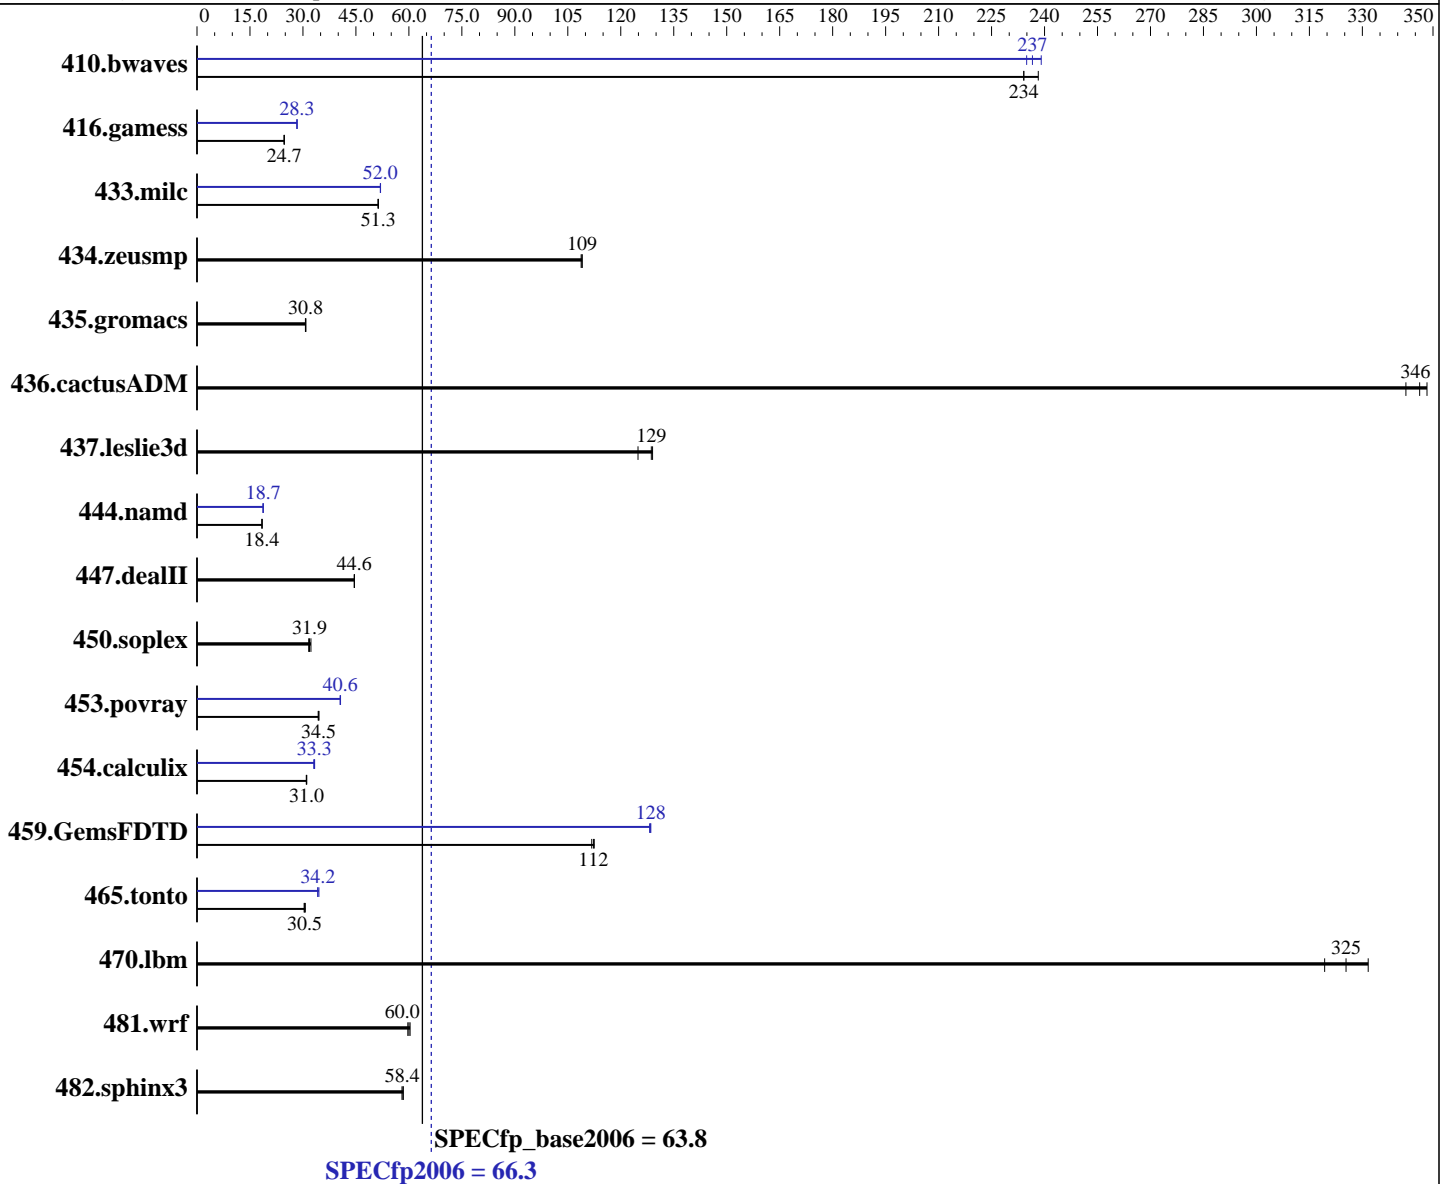

Hardware	
CPU Name:	Intel Xeon E5-2430
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago)
	Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
	Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **66.3**

## Express5800/T120d (Intel Xeon E5-2430)

SPECfp\_base2006 = **63.8**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>58.0</b>	<b>234</b>	57.0	238	58.0	234	<b>57.4</b>	<b>237</b>	56.8	239	57.8	235
416.gamess	792	24.7	<b>793</b>	<b>24.7</b>	794	24.7	<b>691</b>	<b>28.3</b>	692	28.3	691	28.3
433.milc	179	51.4	179	51.3	<b>179</b>	<b>51.3</b>	<b>177</b>	<b>52.0</b>	177	52.0	177	51.9
434.zeusmp	83.5	109	<b>83.5</b>	<b>109</b>	83.7	109	83.5	109	<b>83.5</b>	<b>109</b>	83.7	109
435.gromacs	<b>232</b>	<b>30.8</b>	232	30.8	233	30.7	<b>232</b>	<b>30.8</b>	232	30.8	233	30.7
436.cactusADM	34.3	348	34.9	342	<b>34.5</b>	<b>346</b>	34.3	348	34.9	342	<b>34.5</b>	<b>346</b>
437.leslie3d	<b>73.1</b>	<b>129</b>	72.9	129	75.3	125	<b>73.1</b>	<b>129</b>	72.9	129	75.3	125
444.namd	435	18.4	<b>436</b>	<b>18.4</b>	436	18.4	428	18.7	428	18.7	<b>428</b>	<b>18.7</b>
447.dealII	<b>257</b>	<b>44.6</b>	257	44.6	257	44.5	<b>257</b>	<b>44.6</b>	257	44.6	257	44.5
450.soplex	<b>262</b>	<b>31.9</b>	264	31.6	258	32.3	<b>262</b>	<b>31.9</b>	264	31.6	258	32.3
453.povray	155	34.3	154	34.5	<b>154</b>	<b>34.5</b>	131	40.6	131	40.6	<b>131</b>	<b>40.6</b>
454.calculix	267	30.9	265	31.1	<b>266</b>	<b>31.0</b>	250	33.1	248	33.3	<b>248</b>	<b>33.3</b>
459.GemsFDTD	94.9	112	<b>94.5</b>	<b>112</b>	94.3	112	82.8	128	82.6	128	<b>82.6</b>	<b>128</b>
465.tonto	321	30.7	324	30.3	<b>323</b>	<b>30.5</b>	285	34.5	<b>288</b>	<b>34.2</b>	288	34.2
470.lbm	<b>42.2</b>	<b>325</b>	41.4	332	43.0	319	<b>42.2</b>	<b>325</b>	41.4	332	43.0	319
481.wrf	185	60.3	<b>186</b>	<b>60.0</b>	187	59.7	185	60.3	<b>186</b>	<b>60.0</b>	187	59.7
482.sphinx3	334	58.4	336	58.0	<b>334</b>	<b>58.4</b>	334	58.4	336	58.0	<b>334</b>	<b>58.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 66.3

Express5800/T120d (Intel Xeon E5-2430)

SPECfp\_base2006 = 63.8

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## General Notes (Continued)

OMP\_NUM\_THREADS = "12"

Added glibc-static-2.12-1.47.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 66.3

Express5800/T120d (Intel Xeon E5-2430)

SPECfp\_base2006 = 63.8

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 66.3

Express5800/T120d (Intel Xeon E5-2430)

SPECfp\_base2006 = 63.8

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 66.3

Express5800/T120d (Intel Xeon E5-2430)

SPECfp\_base2006 = 63.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:35:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 June 2012.