



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint®\_rate2006 = 351**

Express5800/A1020a (Intel Xeon E5-2690)

**SPECint\_rate\_base2006 = 334**

**CPU2006 license:** 9006


**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

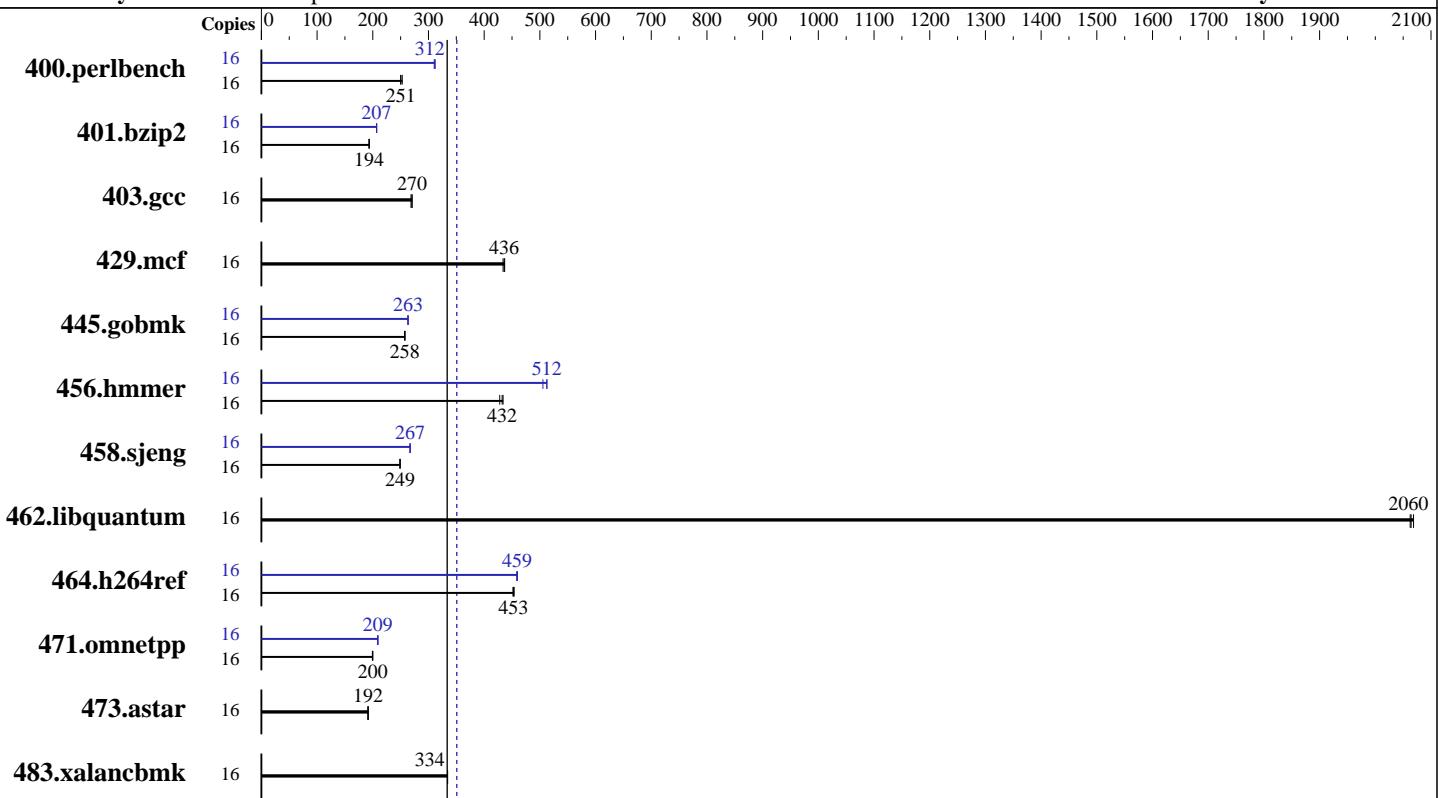

**SPECint\_rate\_base2006 = 334**

**SPECint\_rate2006 = 351**

## Hardware

CPU Name: Intel Xeon E5-2690  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 2900  
FPU: Integrated  
CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 15000 RPM  
Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 5.7 (Tikanga)  
Compiler: Kernel 2.6.18-274.el5 on an x86\_64  
Auto Parallel: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/A1020a (Intel Xeon E5-2690)

**SPECint\_rate2006 = 351**

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	618	253	625	250	<b>624</b>	<b>251</b>	16	504	310	<b>502</b>	<b>312</b>	501	312
401.bzip2	16	797	194	799	193	<b>797</b>	<b>194</b>	16	<b>746</b>	<b>207</b>	746	207	746	207
403.gcc	16	476	271	480	269	<b>476</b>	<b>270</b>	16	476	271	480	269	<b>476</b>	<b>270</b>
429.mcf	16	<b>335</b>	<b>436</b>	336	434	334	437	16	<b>335</b>	<b>436</b>	336	434	334	437
445.gobmk	16	<b>651</b>	<b>258</b>	651	258	653	257	16	638	263	637	263	<b>637</b>	<b>263</b>
456.hammer	16	344	434	<b>345</b>	<b>432</b>	349	428	16	295	506	<b>291</b>	<b>512</b>	291	513
458.sjeng	16	778	249	<b>778</b>	<b>249</b>	777	249	16	<b>725</b>	<b>267</b>	725	267	725	267
462.libquantum	16	160	2070	161	2060	<b>161</b>	<b>2060</b>	16	160	2070	161	2060	<b>161</b>	<b>2060</b>
464.h264ref	16	784	452	780	454	<b>782</b>	<b>453</b>	16	<b>771</b>	<b>459</b>	770	460	772	459
471.omnetpp	16	500	200	<b>500</b>	<b>200</b>	502	199	16	478	209	478	209	<b>478</b>	<b>209</b>
473.astar	16	585	192	<b>586</b>	<b>192</b>	588	191	16	<b>585</b>	192	<b>586</b>	<b>192</b>	588	191
483.xalancbmk	16	330	334	330	334	<b>330</b>	<b>334</b>	16	330	334	330	334	<b>330</b>	<b>334</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

Memory Voltage: 1.5 V

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

```
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 19800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2690)

**SPECint\_rate2006 = 351**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/A1020a (Intel Xeon E5-2690)

**SPECint\_rate2006 = 351**

**CPU2006 license:** 9006

**Test date:** May-2012

**Test sponsor:** NEC Corporation

**Hardware Availability:** May-2012

**Tested by:** NEC Corporation

**Software Availability:** Dec-2011

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`  
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`  
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`  
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`  
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 351

Express5800/A1020a (Intel Xeon E5-2690)

SPECint\_rate\_base2006 = 334

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/opt/SmartHeap_8.1/lib -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:40:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 June 2012.