



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECint®\_rate2006 = 408**

ACTINA SOLAR 205 S5 (Intel Xeon E5-2430)

**SPECint\_rate\_base2006 = 392**

CPU2006 license: 9008


Test date: Apr-2012

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

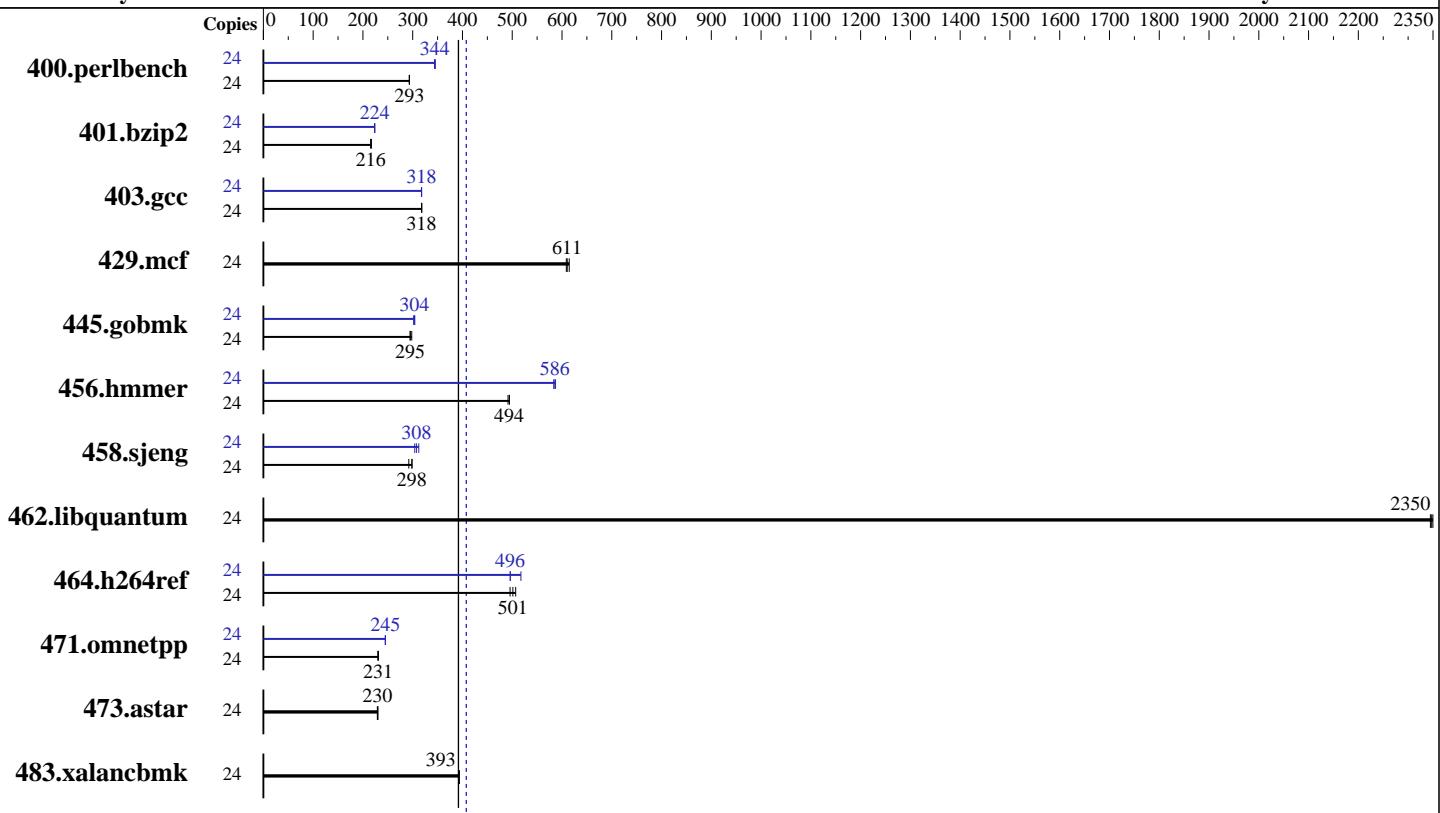

**SPECint\_rate\_base2006 = 392**

**SPECint\_rate2006 = 408**

## Hardware

CPU Name: Intel Xeon E5-2430  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 2 TB SATA 7200 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>408</b>
ACTINA SOLAR 205 S5 (Intel Xeon E5-2430)	<b>SPECint_rate_base2006 =</b>	<b>392</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Apr-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	May-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	799	294	800	293	<b>799</b>	<b>293</b>	24	679	345	682	344	<b>681</b>	<b>344</b>
401.bzip2	24	1068	217	1074	216	<b>1071</b>	<b>216</b>	24	1035	224	1037	223	<b>1036</b>	<b>224</b>
403.gcc	24	607	318	<b>608</b>	<b>318</b>	608	318	24	607	318	<b>608</b>	<b>318</b>	608	318
429.mcf	24	356	615	<b>359</b>	<b>611</b>	360	609	24	356	615	<b>359</b>	<b>611</b>	360	609
445.gobmk	24	<b>853</b>	<b>295</b>	845	298	854	295	24	828	304	<b>828</b>	<b>304</b>	834	302
456.hammer	24	<b>453</b>	<b>494</b>	456	492	453	494	24	384	583	<b>382</b>	<b>586</b>	381	587
458.sjeng	24	<b>973</b>	<b>298</b>	994	292	972	299	24	955	304	<b>944</b>	<b>308</b>	930	312
462.libquantum	24	212	2350	<b>212</b>	<b>2350</b>	212	2340	24	212	2350	<b>212</b>	<b>2350</b>	212	2340
464.h264ref	24	1048	507	<b>1059</b>	<b>501</b>	1072	496	24	1026	517	1071	496	<b>1071</b>	<b>496</b>
471.omnetpp	24	649	231	652	230	<b>650</b>	<b>231</b>	24	612	245	612	245	<b>612</b>	<b>245</b>
473.astar	24	732	230	<b>734</b>	<b>230</b>	736	229	24	732	230	<b>734</b>	<b>230</b>	736	229
483.xalancbmk	24	421	393	<b>421</b>	<b>393</b>	421	394	24	421	393	<b>421</b>	<b>393</b>	421	394

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on linux-zwpf Mon Apr 30 11:50:49 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>408</b>
ACTINA SOLAR 205 S5 (Intel Xeon E5-2430)	<b>SPECint_rate_base2006 =</b>	<b>392</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Apr-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	May-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
  MemTotal:       65925688 kB
  HugePages_Total:        0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
  SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 2

uname -a:
  Linux linux-zwfp 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
  (d73692b) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 30 11:44 last=S

SPEC is set to: /cpu2006.1.2
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2        ext3  1.8T   51G  1.8T    3%  /


Additional information from dmidecode:

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>408</b>
ACTINA SOLAR 205 S5 (Intel Xeon E5-2430)	<b>SPECint_rate_base2006 =</b>	<b>392</b>
CPU2006 license: 9008	Test date:	Apr-2012
Test sponsor: ACTION S.A.	Hardware Availability:	May-2012
Tested by: ACTION S.A.	Software Availability:	Feb-2012

## Base Compiler Invocation

C benchmarks:  
  `icc -m32`

C++ benchmarks:  
  `icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:  
  `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:  
  `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  -Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:  
  `403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):  
  `icc -m32`

400.perlbench: `icc -m64`  
401.bzip2: `icc -m64`  
456.hmmmer: `icc -m64`  
458.sjeng: `icc -m64`

C++ benchmarks:  
  `icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>408</b>
ACTINA SOLAR 205 S5 (Intel Xeon E5-2430)	<b>SPECint_rate_base2006 =</b>	<b>392</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Apr-2012
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	May-2012
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
  
473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>408</b>
ACTINA SOLAR 205 S5 (Intel Xeon E5-2430)	<b>SPECint_rate_base2006 =</b>	<b>392</b>
CPU2006 license: 9008	Test date:	Apr-2012
Test sponsor: ACTION S.A.	Hardware Availability:	May-2012
Tested by: ACTION S.A.	Software Availability:	Feb-2012

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:41:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 June 2012.