



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp®_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

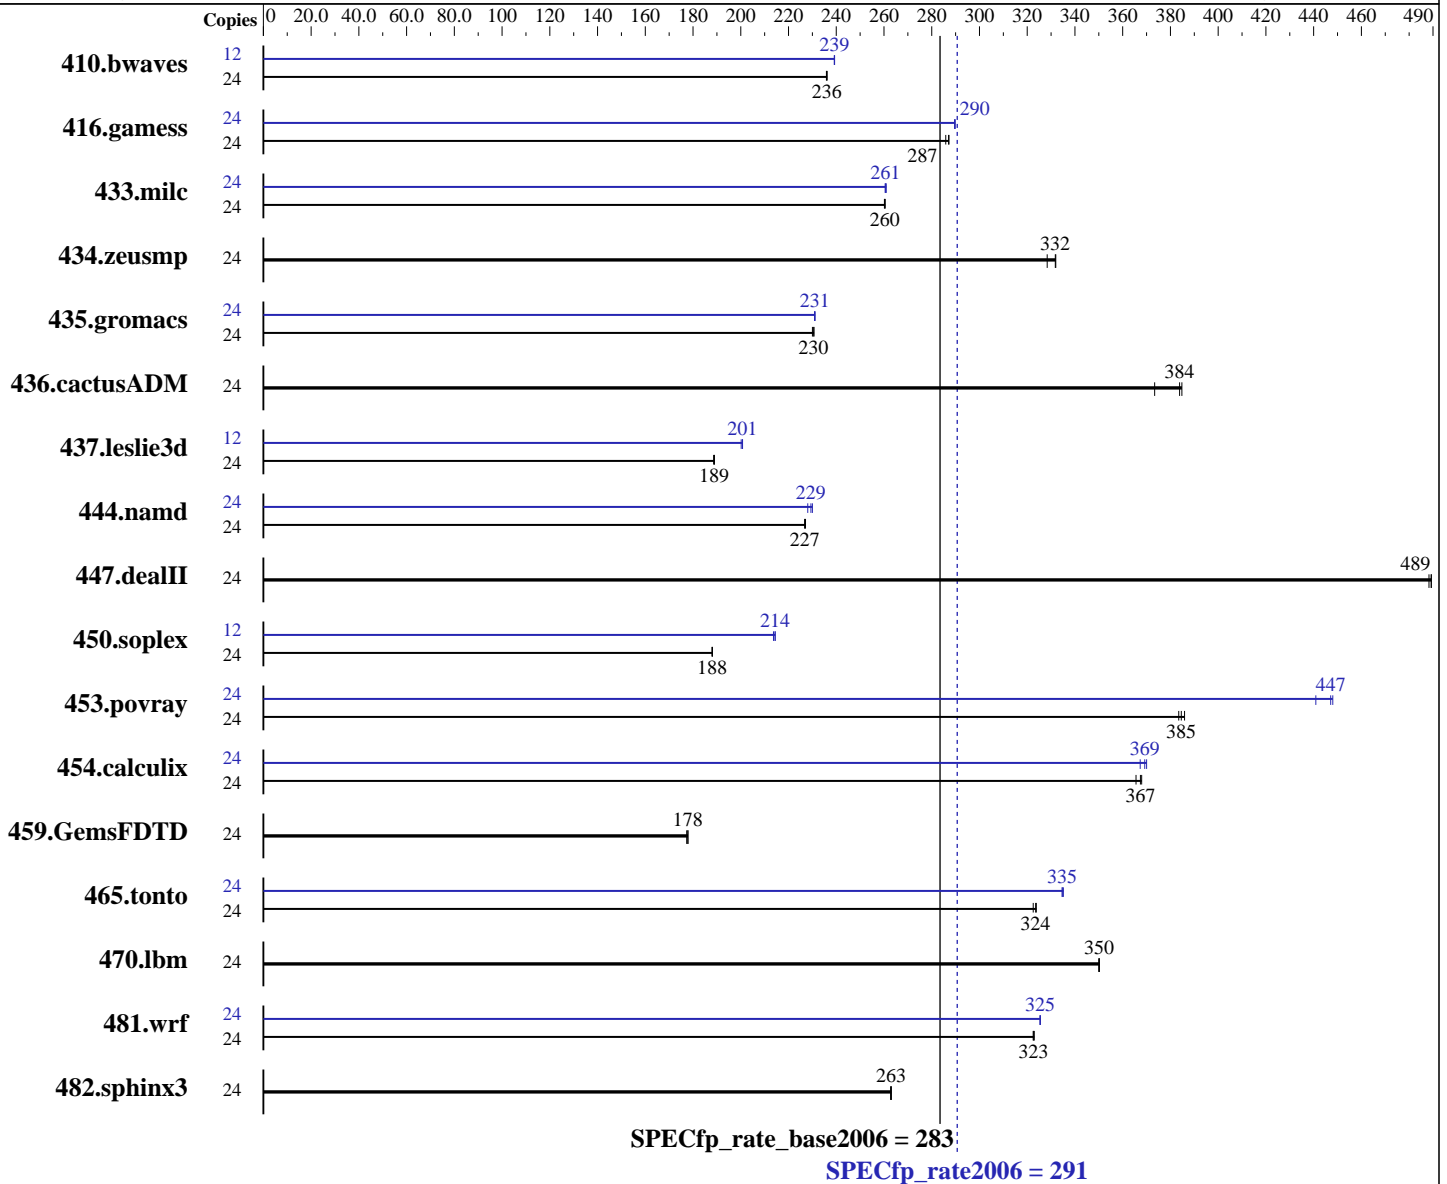

Hardware

CPU Name: Intel Xeon E5-2420
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
Disk Subsystem: 2 x 147 GB SAS, 15000 RPM RAID1 configuration
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1383	236	<u>1382</u>	<u>236</u>	1381	236	12	<u>682</u>	<u>239</u>	682	239	681	239		
416.gamess	24	1636	287	<u>1637</u>	<u>287</u>	1644	286	24	<u>1622</u>	<u>290</u>	1623	290	1622	290		
433.milc	24	847	260	846	260	<u>846</u>	<u>260</u>	24	846	260	844	261	<u>845</u>	<u>261</u>		
434.zeusmp	24	665	328	<u>658</u>	<u>332</u>	658	332	24	665	328	<u>658</u>	<u>332</u>	658	332		
435.gromacs	24	743	231	<u>744</u>	<u>230</u>	745	230	24	<u>742</u>	<u>231</u>	742	231	741	231		
436.cactusADM	24	768	373	745	385	<u>747</u>	<u>384</u>	24	768	373	745	385	<u>747</u>	<u>384</u>		
437.leslie3d	24	<u>1194</u>	<u>189</u>	1196	189	1194	189	12	563	200	562	201	<u>562</u>	<u>201</u>		
444.namd	24	847	227	<u>849</u>	<u>227</u>	849	227	24	<u>839</u>	<u>229</u>	837	230	844	228		
447.dealII	24	<u>561</u>	<u>489</u>	561	489	562	488	24	<u>561</u>	<u>489</u>	561	489	562	488		
450.soplex	24	<u>1064</u>	<u>188</u>	1064	188	1065	188	12	<u>467</u>	<u>214</u>	467	214	468	214		
453.povray	24	333	383	<u>332</u>	<u>385</u>	331	386	24	285	448	<u>286</u>	<u>447</u>	290	441		
454.calculix	24	<u>539</u>	<u>367</u>	542	366	538	368	24	535	370	<u>536</u>	<u>369</u>	539	367		
459.GemsFDTD	24	<u>1432</u>	<u>178</u>	1436	177	1432	178	24	<u>1432</u>	<u>178</u>	1436	177	1432	178		
465.tonto	24	729	324	<u>730</u>	<u>324</u>	732	323	24	705	335	<u>706</u>	<u>335</u>	706	335		
470.lbm	24	942	350	<u>942</u>	<u>350</u>	942	350	24	942	350	<u>942</u>	<u>350</u>	942	350		
481.wrf	24	830	323	831	322	<u>831</u>	<u>323</u>	24	<u>824</u>	<u>325</u>	824	325	824	325		
482.sphinx3	24	1780	263	1778	263	<u>1778</u>	<u>263</u>	24	1780	263	1778	263	<u>1778</u>	<u>263</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Tue Jul 24 09:09:19 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2420 0 @ 1.90GHz
 2 "physical id"s (chips)
 24 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 6
siblings       : 12
physical 0:    : cores 0 1 2 3 4 5
physical 1:    : cores 0 1 2 3 4 5
cache size     : 15360 KB
```

From /proc/meminfo

```
MemTotal:      99009112 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 24 09:02

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

General Notes (Continued)

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35

Test date: Jul-2012

Test sponsor: HITACHI

Hardware Availability: Jun-2012

Tested by: HITACHI

Software Availability: Feb-2012

Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp_rate2006 = 291

BladeSymphony BS320 (Intel Xeon E5-2420)

SPECfp_rate_base2006 = 283

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:12:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 August 2012.