



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR380 F2 (Xeon E5-2670)

SPECfp®_rate2006 = 450

SPECfp_rate_base2006 = 436

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

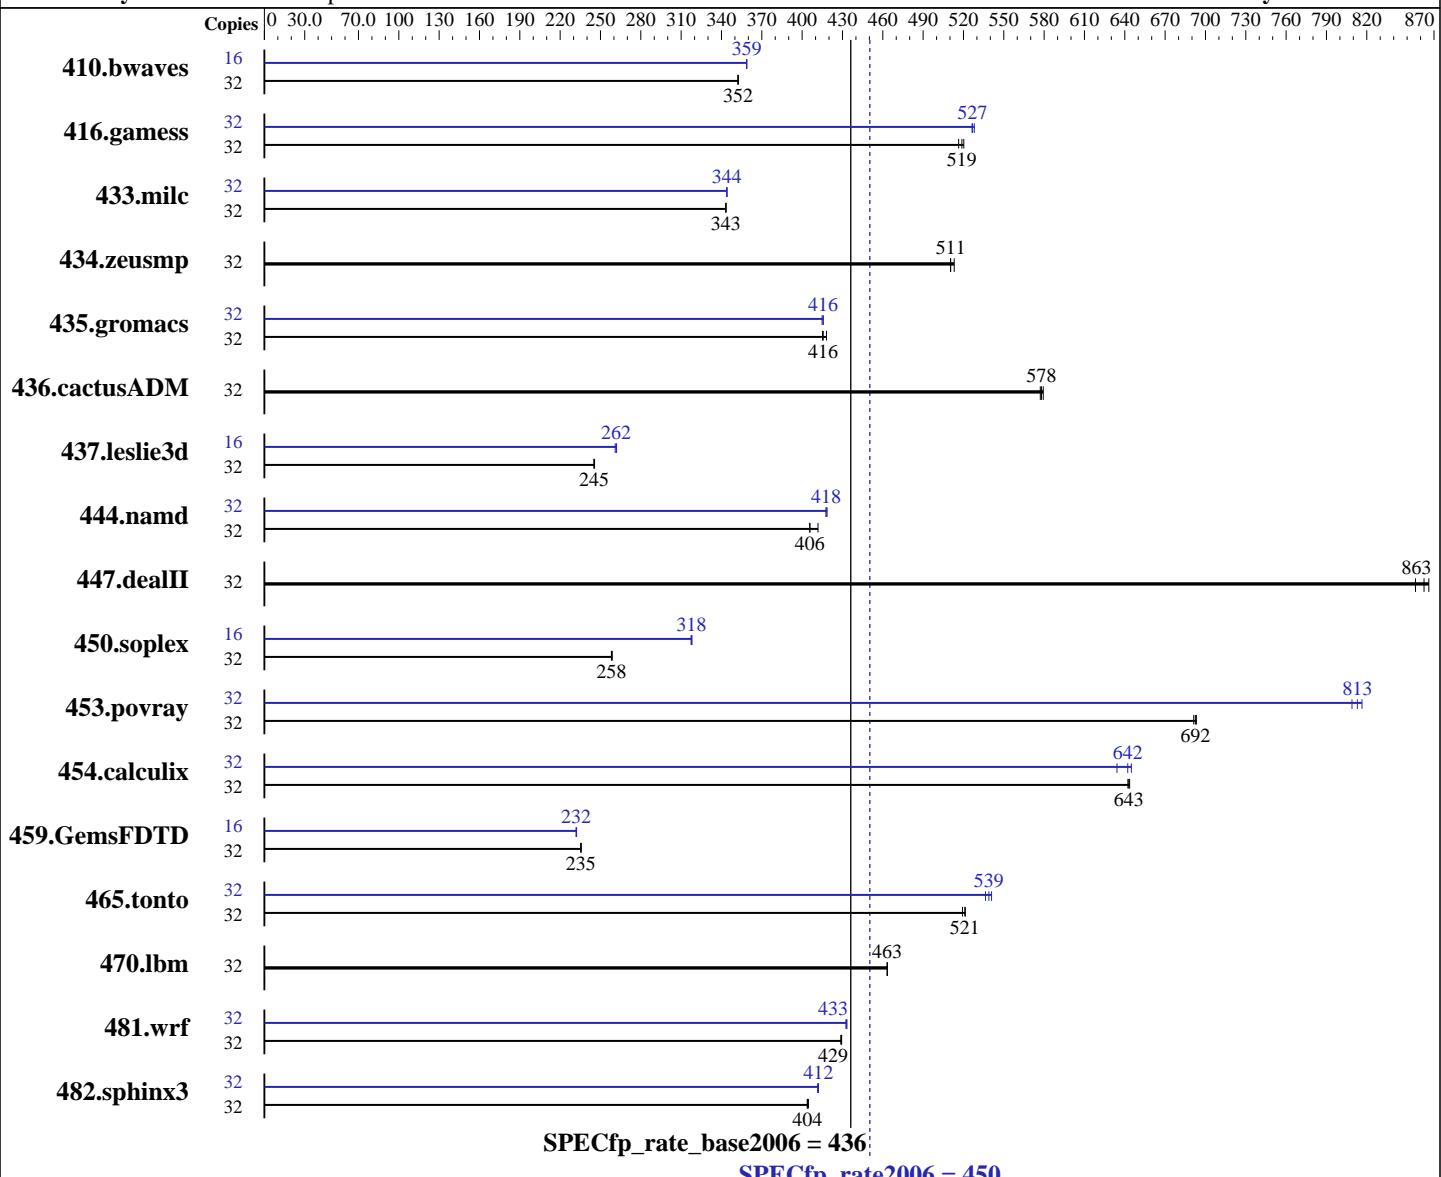

Hardware

CPU Name: Intel Xeon E5-2670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 450

Acer AR380 F2 (Xeon E5-2670)

SPECfp_rate_base2006 = 436

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jun-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
 Disk Subsystem: 1 x 600 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1235	352	1233	353	<u>1234</u>	<u>352</u>	16	606	359	606	359	<u>606</u>	<u>359</u>
416.gamess	32	1204	520	<u>1208</u>	<u>519</u>	1213	516	32	<u>1189</u>	<u>527</u>	1190	526	<u>1187</u>	<u>528</u>
433.milc	32	855	343	856	343	<u>856</u>	<u>343</u>	32	<u>854</u>	<u>344</u>	854	344	<u>854</u>	<u>344</u>
434.zeusmp	32	567	513	571	510	<u>570</u>	<u>511</u>	32	567	513	571	510	<u>570</u>	<u>511</u>
435.gromacs	32	546	418	<u>550</u>	<u>416</u>	550	415	32	<u>550</u>	<u>416</u>	550	416	<u>551</u>	<u>415</u>
436.cactusADM	32	<u>662</u>	<u>578</u>	660	579	663	577	32	<u>662</u>	<u>578</u>	660	579	<u>663</u>	<u>577</u>
437.leslie3d	32	1227	245	1225	246	<u>1227</u>	<u>245</u>	16	574	262	<u>575</u>	<u>262</u>	576	261
444.namd	32	633	406	<u>632</u>	<u>406</u>	623	412	32	614	418	<u>614</u>	<u>418</u>	613	419
447.dealII	32	428	856	423	866	<u>424</u>	<u>863</u>	32	428	856	423	866	<u>424</u>	<u>863</u>
450.soplex	32	1031	259	1034	258	<u>1034</u>	<u>258</u>	16	420	318	420	317	<u>420</u>	<u>318</u>
453.povray	32	246	693	<u>246</u>	<u>692</u>	246	691	32	210	809	<u>209</u>	<u>813</u>	209	816
454.calculix	32	411	642	410	644	<u>411</u>	<u>643</u>	32	416	634	409	645	<u>411</u>	<u>642</u>
459.GemsFDTD	32	1442	235	<u>1442</u>	<u>235</u>	1441	236	16	<u>732</u>	<u>232</u>	731	232	<u>732</u>	<u>232</u>
465.tonto	32	604	521	<u>604</u>	<u>521</u>	606	519	32	<u>584</u>	<u>539</u>	587	536	<u>582</u>	<u>541</u>
470.lbm	32	<u>949</u>	<u>463</u>	949	463	949	463	32	<u>949</u>	<u>463</u>	949	463	<u>949</u>	<u>463</u>
481.wrf	32	832	429	834	429	<u>833</u>	<u>429</u>	32	825	433	<u>825</u>	<u>433</u>	826	433
482.sphinx3	32	1544	404	1541	405	<u>1544</u>	<u>404</u>	32	<u>1513</u>	<u>412</u>	1516	412	<u>1513</u>	<u>412</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on spec Mon Sep 10 12:00:02 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 450

Acer AR380 F2 (Xeon E5-2670)

SPECfp_rate_base2006 = 436

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jun-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132269728 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux spec 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 10 11:48
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  397G  8.2G  369G   3%  /
```

```
Additional information from dmidecode:
```

```
Memory:
 14x Hynix Semiconducto HMT31GR7CFR4A 8 GB 1333 MHz 1 rank
 2x Hynix Semiconductor HMT31GR7CFR4A- 8 GB 1333 MHz 1 rank
```

```
(End of data from sysinfo program)
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR380 F2 (Xeon E5-2670)

SPECfp_rate2006 = 450

SPECfp_rate_base2006 = 436

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jun-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Acer AR360 F2 and AR380 F2 are electronically equivalent.

This result was measured on Acer AR380 F2.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR380 F2 (Xeon E5-2670)

SPECfp_rate2006 = 450

SPECfp_rate_base2006 = 436

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3:

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex:

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves:

```
-DSPEC_CPU_LP64
```


416.gamess:

```
-DSPEC_CPU_LP64
```


433.milc:

```
-DSPEC_CPU_LP64
```


434.zeusmp:

```
-DSPEC_CPU_LP64
```


435.gromacs:

```
-DSPEC_CPU_LP64 -nofor_main
```


436.cactusADM:

```
-DSPEC_CPU_LP64 -nofor_main
```


437.leslie3d:

```
-DSPEC_CPU_LP64
```


444.namd:

```
-DSPEC_CPU_LP64
```


447.dealII:

```
-DSPEC_CPU_LP64
```


453.povray:

```
-DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR380 F2 (Xeon E5-2670)

SPECfp_rate2006 = 450

SPECfp_rate_base2006 = 436

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR380 F2 (Xeon E5-2670)

SPECfp_rate2006 = 450

SPECfp_rate_base2006 = 436

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 12:50:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 October 2012.