



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037A-iL (X9SAE, Intel Xeon E3-1280 v2)

SPECint®\_rate2006 = 197

SPECint\_rate\_base2006 = 190

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

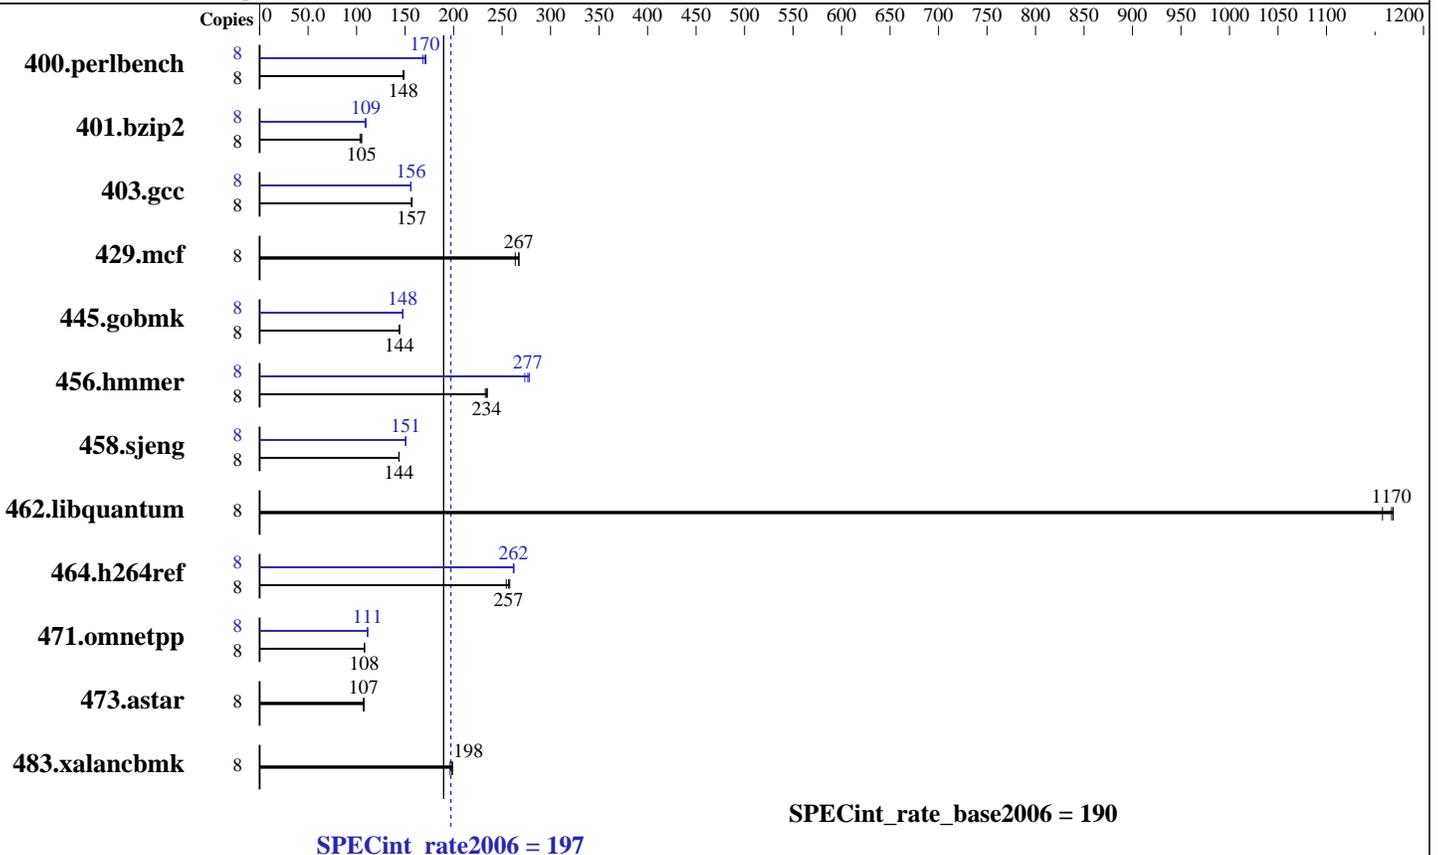

### Hardware

CPU Name: Intel Xeon E3-1280 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800U-11)  
 Disk Subsystem: 1 x 300 GB SATA II, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037A-iL (X9SAE, Intel Xeon E3-1280 v2)

SPECint\_rate2006 = 197

SPECint\_rate\_base2006 = 190

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2012  
Hardware Availability: Apr-2012  
Software Availability: Jun-2012

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	8	525	149	528	148	<u>528</u>	<u>148</u>	8	464	168	<u>458</u>	<u>170</u>	456	171		
401.bzip2	8	734	105	746	104	<u>735</u>	<u>105</u>	8	710	109	<u>706</u>	<u>109</u>	704	110		
403.gcc	8	412	156	410	157	<u>411</u>	<u>157</u>	8	<u>413</u>	<u>156</u>	412	156	413	156		
429.mcf	8	<u>273</u>	<u>267</u>	277	264	273	268	8	<u>273</u>	<u>267</u>	277	264	273	268		
445.gobmk	8	582	144	<u>582</u>	<u>144</u>	582	144	8	569	147	567	148	<u>568</u>	<u>148</u>		
456.hammer	8	<u>319</u>	<u>234</u>	321	233	318	235	8	273	273	268	278	<u>270</u>	<u>277</u>		
458.sjeng	8	673	144	<u>674</u>	<u>144</u>	674	144	8	642	151	643	151	<u>643</u>	<u>151</u>		
462.libquantum	8	143	1160	<u>142</u>	<u>1170</u>	142	1170	8	143	1160	<u>142</u>	<u>1170</u>	142	1170		
464.h264ref	8	686	258	<u>690</u>	<u>257</u>	696	254	8	<u>676</u>	<u>262</u>	677	262	675	262		
471.omnetpp	8	463	108	461	108	<u>463</u>	<u>108</u>	8	450	111	448	112	<u>450</u>	<u>111</u>		
473.astar	8	521	108	525	107	<u>524</u>	<u>107</u>	8	521	108	525	107	<u>524</u>	<u>107</u>		
483.xalancbmk	8	281	196	278	199	<u>278</u>	<u>198</u>	8	281	196	278	199	<u>278</u>	<u>198</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /usr/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ 8787f7622badcf24e01c368b1db4377c
running on localhost Wed Sep 26 14:58:39 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 V2 @ 3.60GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037A-iL (X9SAE, Intel Xeon E3-1280 v2)

SPECint\_rate2006 = 197

SPECint\_rate\_base2006 = 190

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2012  
Hardware Availability: Apr-2012  
Software Availability: Jun-2012

### Platform Notes (Continued)

physical 0: cores 0 1 2 3  
cache size : 8192 KB

From /proc/meminfo  
MemTotal: 16412704 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux localhost 2.6.32-279.el6.x86\_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Sep 26 14:54

SPEC is set to: /usr/cpu2006  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/VolGroup-lv\_root  
ext4 50G 36G 12G 76% /

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

### Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037A-iL (X9SAE, Intel Xeon E3-1280 v2)

SPECint\_rate2006 = 197

SPECint\_rate\_base2006 = 190

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2012  
Hardware Availability: Apr-2012  
Software Availability: Jun-2012

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64  
C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037A-iL (X9SAE, Intel Xeon E3-1280 v2)

SPECint\_rate2006 = 197

SPECint\_rate\_base2006 = 190

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5037A-iL (X9SAE, Intel Xeon E3-1280 v2)

SPECint\_rate2006 = 197

SPECint\_rate\_base2006 = 190

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:53:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 October 2012.