



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C260 M2 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 583**

**SPECint\_rate\_base2006 = 552**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Oct-2012

**Hardware Availability:** Jun-2011

**Software Availability:** Dec-2011

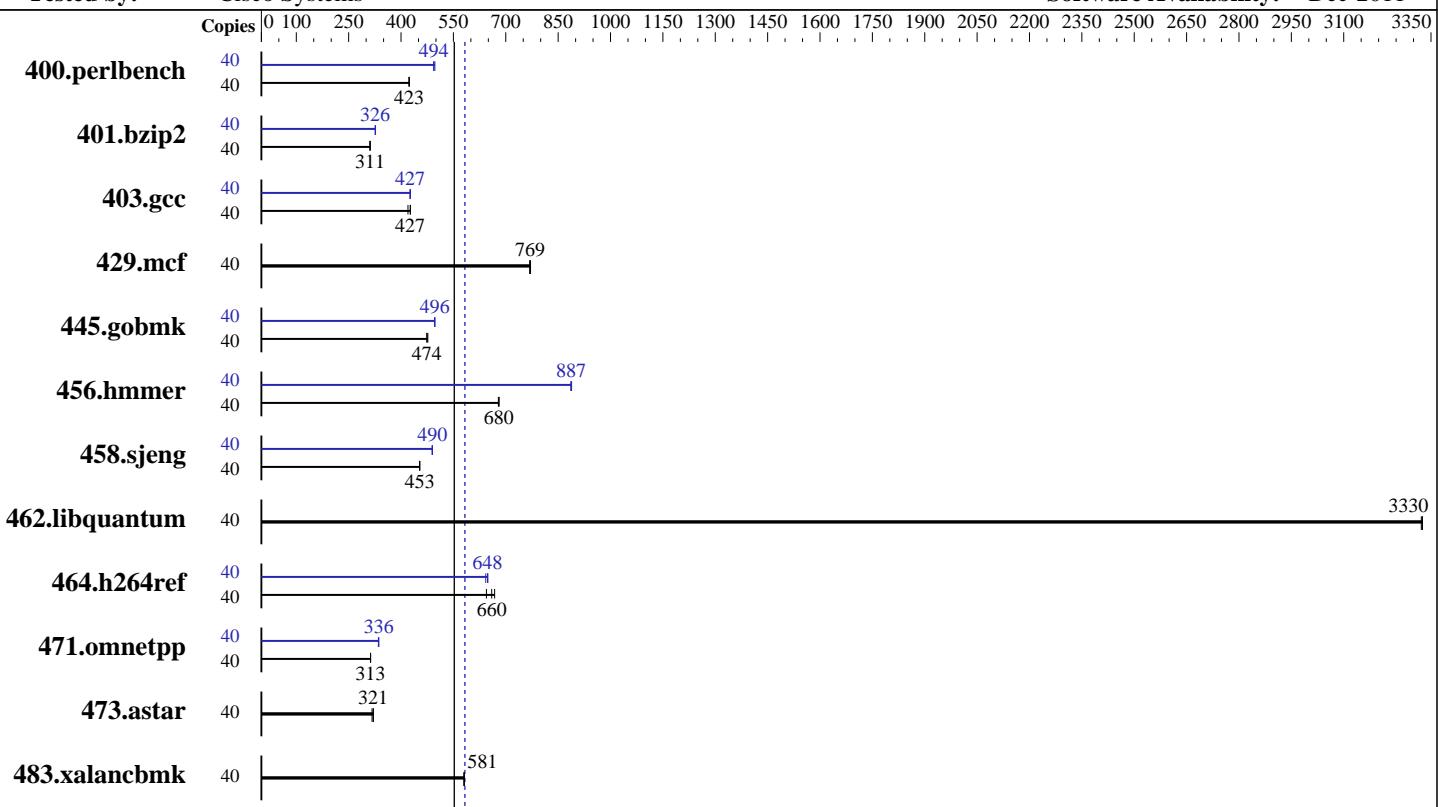

**SPECint\_rate\_base2006 = 552**

**SPECint\_rate2006 = 583**

### Hardware

CPU Name: Intel Xeon E7-2870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 4Rx4 PC3-8500R-9, ECC)  
 Disk Subsystem: 1 X 146 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Compiler: 2.6.32-220.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C260 M2 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 583**

**SPECint\_rate\_base2006 = 552**

**CPU2006 license:** 9019

**Test date:** Oct-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2011

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	922	424	<b>923</b>	<b>423</b>	924	423	40	786	497	792	494	<b>791</b>	<b>494</b>
401.bzip2	40	1239	312	1241	311	<b>1240</b>	<b>311</b>	40	<b>1183</b>	<b>326</b>	1181	327	1184	326
403.gcc	40	755	427	767	420	<b>755</b>	<b>427</b>	40	754	427	<b>755</b>	<b>427</b>	757	426
429.mcf	40	475	769	473	771	<b>474</b>	<b>769</b>	40	475	769	473	771	<b>474</b>	<b>769</b>
445.gobmk	40	<b>885</b>	<b>474</b>	880	477	885	474	40	844	497	<b>845</b>	<b>496</b>	845	496
456.hammer	40	<b>548</b>	<b>680</b>	548	680	550	679	40	420	889	421	886	<b>421</b>	<b>887</b>
458.sjeng	40	1068	453	<b>1067</b>	<b>453</b>	1067	454	40	<b>988</b>	<b>490</b>	988	490	989	489
462.libquantum	40	<b>249</b>	<b>3330</b>	249	3330	249	3320	40	<b>249</b>	<b>3330</b>	249	3330	249	3320
464.h264ref	40	<b>1342</b>	<b>660</b>	1373	645	1325	668	40	1377	643	<b>1367</b>	<b>648</b>	1365	649
471.omnetpp	40	799	313	<b>799</b>	<b>313</b>	800	313	40	744	336	746	335	<b>744</b>	<b>336</b>
473.astar	40	886	317	<b>876</b>	<b>321</b>	876	321	40	886	317	<b>876</b>	<b>321</b>	876	321
483.xalancbmk	40	475	581	<b>475</b>	<b>581</b>	476	580	40	475	581	<b>475</b>	<b>581</b>	476	580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /opt/cpu12.1/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on localhost.localdomain Fri Oct 5 08:53:09 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 2870 @ 2.40GHz
  2 "physical id"s (chips)
  40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C260 M2 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 583**

**CPU2006 license:** 9019

**Test date:** Oct-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2011

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB

From /proc/meminfo
MemTotal:      529155220 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 5 04:57

SPEC is set to: /opt/cpu12.1
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/sda1        ext4   134G   15G  113G  12%  /


Additional information from dmidecode:

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu12.1/libs/32:/opt/cpu12.1/libs/64"

Intel HT Technology = enable

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C260 M2 (Intel Xeon E7-2870, 2.40 GHz)

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

**SPECint\_rate2006 = 583**

**SPECint\_rate\_base2006 = 552**

Test date: Oct-2012

Hardware Availability: Jun-2011

Software Availability: Dec-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C260 M2 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 583**

**CPU2006 license:** 9019

**Test date:** Oct-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2011

**Tested by:** Cisco Systems

**Software Availability:** Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C260 M2 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 583**

**SPECint\_rate\_base2006 = 552**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Oct-2012

**Hardware Availability:** Jun-2011

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:59:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 November 2012.