



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

## SPECint<sup>®</sup>\_rate2006 = 398

## Acer AR585 F1 (AMD Opteron 6308)

## SPECint\_rate\_base2006 = 351

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

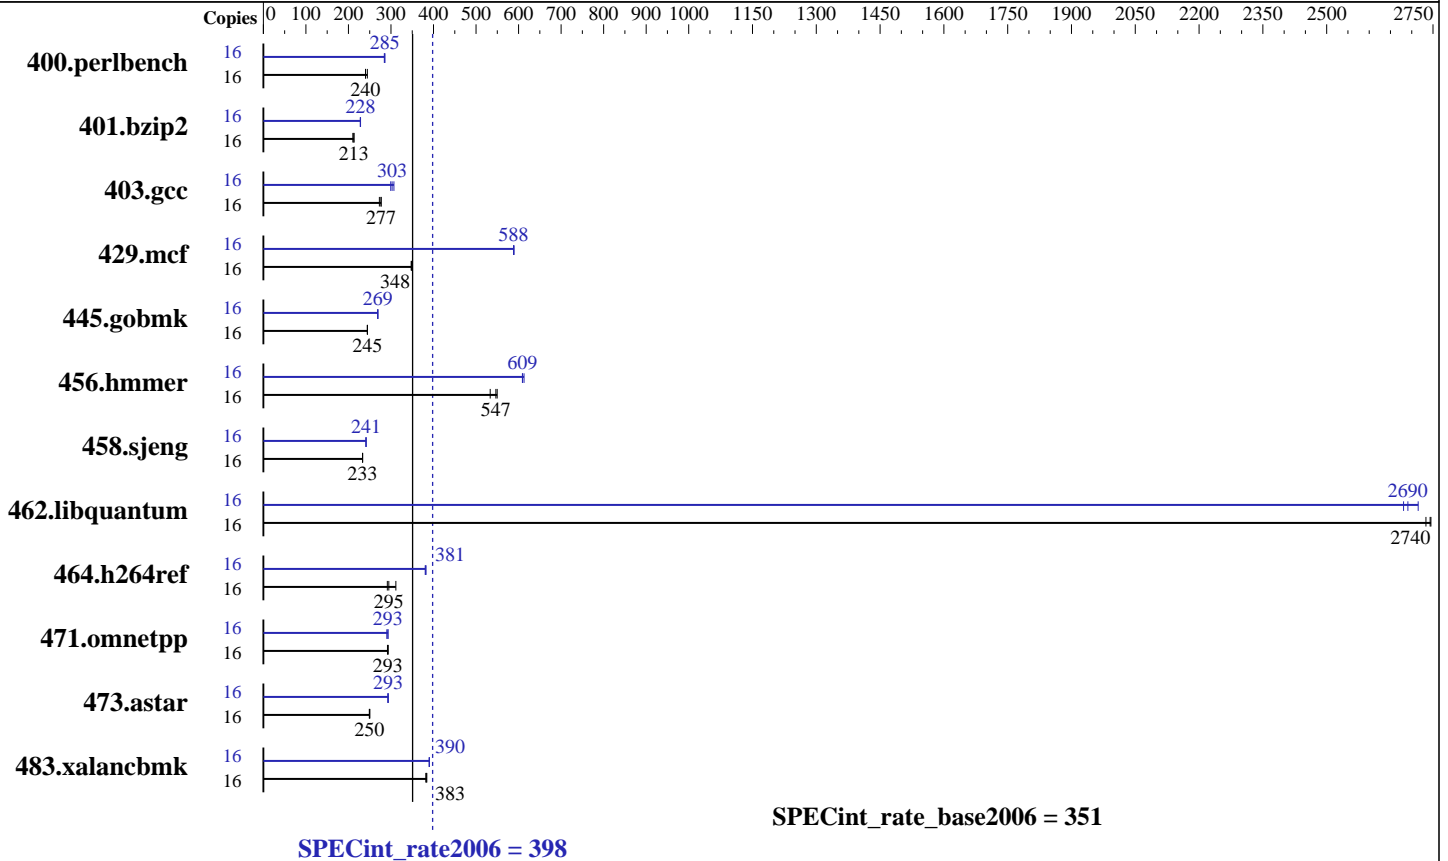

### Hardware

CPU Name: AMD Opteron 6308  
 CPU Characteristics: 3500  
 CPU MHz: Integrated  
 FPU: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) enabled: 2,4 chips  
 CPU(s) orderable: 128 KB I on chip per chip,  
 Primary Cache: 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
 Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 398

Acer AR585 F1 (AMD Opteron 6308)

SPECint\_rate\_base2006 = 351

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	639	244	<b><u>651</u></b>	<b><u>240</u></b>	651	240	16	547	286	550	284	<b><u>548</u></b>	<b><u>285</u></b>
401.bzip2	16	734	210	<b><u>725</u></b>	<b><u>213</u></b>	725	213	16	676	228	<b><u>676</u></b>	<b><u>228</u></b>	678	228
403.gcc	16	472	273	<b><u>466</u></b>	<b><u>277</u></b>	465	277	16	430	299	<b><u>426</u></b>	<b><u>303</u></b>	420	307
429.mcf	16	420	348	<b><u>419</u></b>	<b><u>348</u></b>	419	348	16	248	589	<b><u>248</u></b>	<b><u>588</u></b>	248	588
445.gobmk	16	<b><u>686</u></b>	<b><u>245</u></b>	686	245	687	244	16	<b><u>624</u></b>	<b><u>269</u></b>	623	269	624	269
456.hammer	16	280	533	<b><u>273</u></b>	<b><u>547</u></b>	272	550	16	245	609	<b><u>245</u></b>	<b><u>609</u></b>	244	613
458.sjeng	16	<b><u>830</u></b>	<b><u>233</u></b>	830	233	831	233	16	802	241	802	241	<b><u>802</u></b>	<b><u>241</u></b>
462.libquantum	16	121	2750	121	2730	<b><u>121</u></b>	<b><u>2740</u></b>	16	122	2720	<b><u>123</u></b>	<b><u>2690</u></b>	124	2680
464.h264ref	16	<b><u>1201</u></b>	<b><u>295</u></b>	1137	311	1215	291	16	926	382	931	380	<b><u>928</u></b>	<b><u>381</u></b>
471.omnetpp	16	341	293	<b><u>341</u></b>	<b><u>293</u></b>	343	292	16	<b><u>341</u></b>	<b><u>293</u></b>	345	290	341	293
473.astar	16	<b><u>450</u></b>	<b><u>250</u></b>	449	250	451	249	16	<b><u>383</u></b>	<b><u>293</u></b>	383	293	383	294
483.xalancbmk	16	287	384	289	382	<b><u>288</u></b>	<b><u>383</u></b>	16	283	390	283	390	<b><u>283</u></b>	<b><u>390</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1206-rate-libs-revA/32:/usr/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 398

Acer AR585 F1 (AMD Opteron 6308)

SPECint\_rate\_base2006 = 351

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:  
-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 398

Acer AR585 F1 (AMD Opteron 6308)

SPECint\_rate\_base2006 = 351

CPU2006 license: 97

Test date: Nov-2012

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2012

Tested by: Acer Incorporated

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 398

Acer AR585 F1 (AMD Opteron 6308)

SPECint\_rate\_base2006 = 351

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
 -CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
 -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll\_size=512 -OPT:unroll\_times\_max=16  
 -LNO:prefetch=2 -LNO:prefetch\_ahead=4 -LNO:pf2=0  
 -CG:local\_sched\_alg=1 -CG:p2align=0 -INLINE:aggressive=ON  
 -IPA:plimit=15000 -IPA:small\_pu=100  
 -HP:bdt=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
 -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
 -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
 -WOPT:sib=on -D\_\_OPEN64\_FAST\_SET -march=bdver2 -mno-fma4  
 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
 -CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
 -OPT:alias=disjoint -INLINE:aggressive=on  
 -IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m  
 -march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
 -OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
 -INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
 -CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
 -TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
 -mno-fma4  
 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/amd1206-acer-platform-rate-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/amd1206-acer-platform-rate-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 398

Acer AR585 F1 (AMD Opteron 6308)

SPECint\_rate\_base2006 = 351

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:31:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 December 2012.