



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp®\_rate2006 = 359

ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)

SPECfp\_rate\_base2006 = 351

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Oct-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

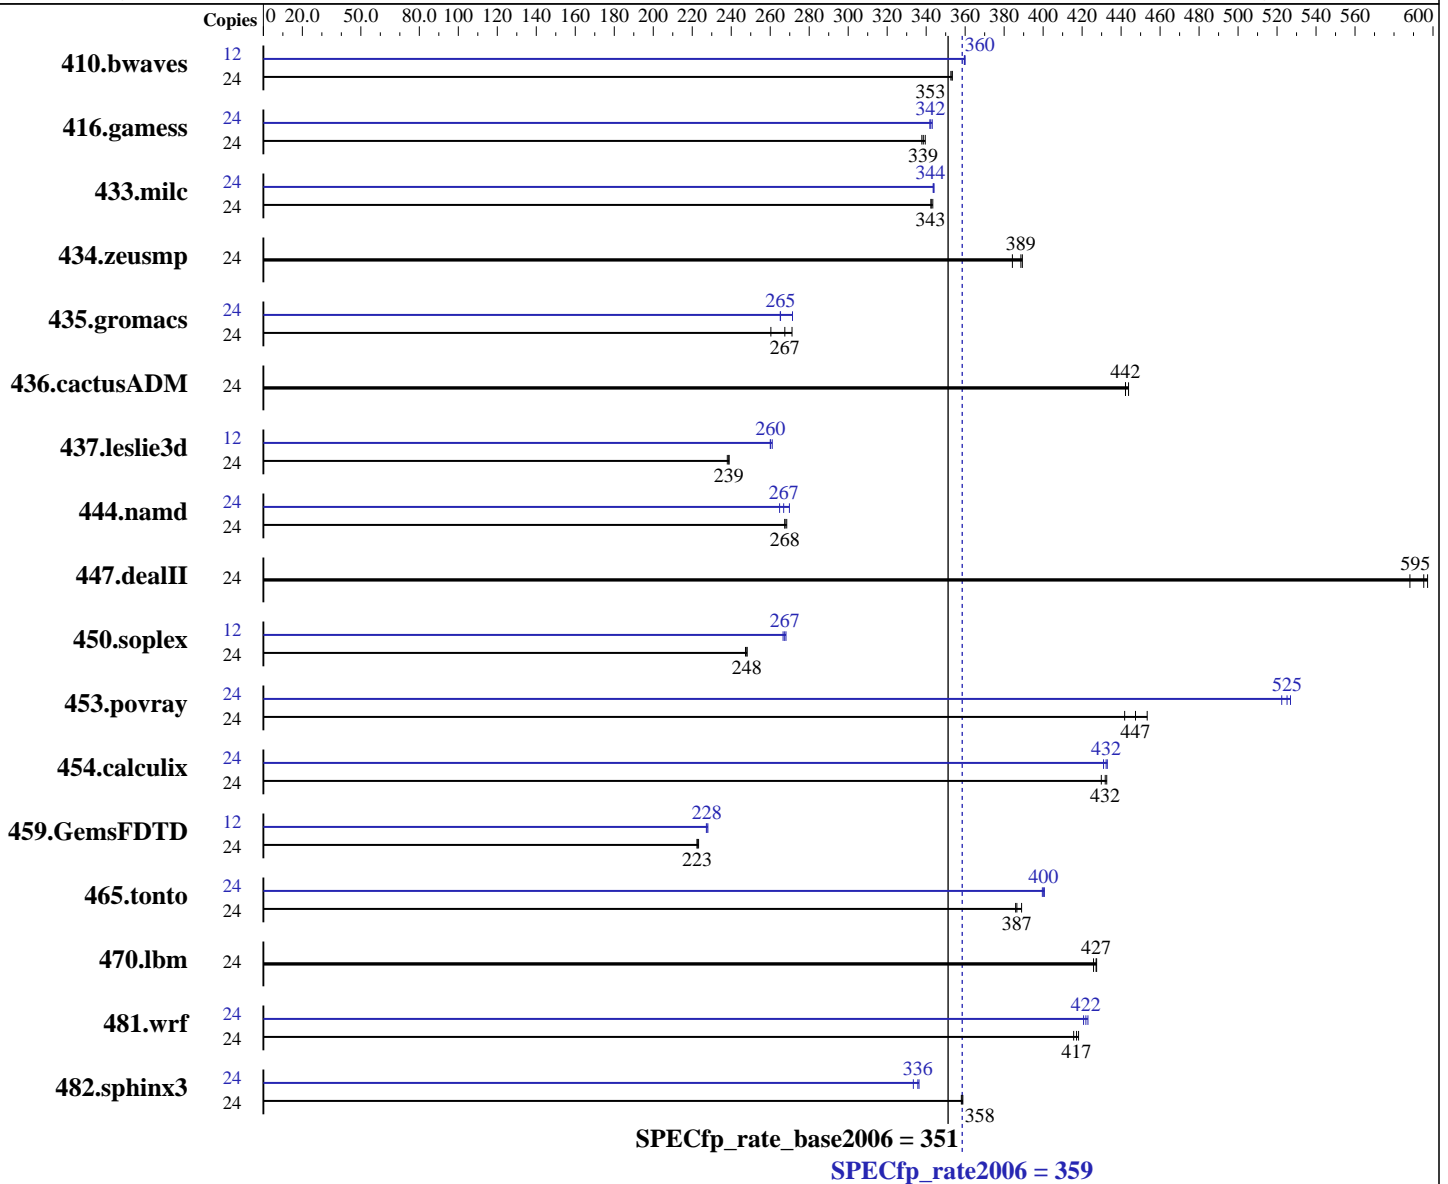

### Hardware

CPU Name: Intel Xeon E5-2630  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp\_rate2006 = 359

ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)

SPECfp\_rate\_base2006 = 351

CPU2006 license: 9008

Test date: Oct-2012

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	925	353	923	353	<b>923</b>	<b>353</b>	12	453	360	<b>453</b>	<b>360</b>	454	360
416.gamess	24	<b>1388</b>	<b>339</b>	1384	340	1391	338	24	1370	343	<b>1373</b>	<b>342</b>	1374	342
433.milc	24	<b>643</b>	<b>343</b>	643	342	642	343	24	640	344	641	344	<b>641</b>	<b>344</b>
434.zeusmp	24	561	389	568	384	<b>562</b>	<b>389</b>	24	561	389	568	384	<b>562</b>	<b>389</b>
435.gromacs	24	632	271	658	260	<b>641</b>	<b>267</b>	24	631	271	<b>646</b>	<b>265</b>	646	265
436.cactusADM	24	646	444	648	442	<b>648</b>	<b>442</b>	24	646	444	648	442	<b>648</b>	<b>442</b>
437.leslie3d	24	944	239	948	238	<b>945</b>	<b>239</b>	12	<b>434</b>	<b>260</b>	432	261	434	260
444.namd	24	717	268	719	268	<b>719</b>	<b>268</b>	24	713	270	727	265	<b>721</b>	<b>267</b>
447.dealII	24	467	588	460	597	<b>461</b>	<b>595</b>	24	467	588	460	597	<b>461</b>	<b>595</b>
450.soplex	24	807	248	<b>807</b>	<b>248</b>	809	247	12	375	267	<b>374</b>	<b>267</b>	373	268
453.povray	24	282	453	<b>285</b>	<b>447</b>	289	442	24	<b>243</b>	<b>525</b>	242	527	244	522
454.calculix	24	461	430	<b>458</b>	<b>432</b>	458	433	24	<b>458</b>	<b>432</b>	457	433	459	431
459.GemsFDTD	24	<b>1144</b>	<b>223</b>	1141	223	1145	222	12	<b>560</b>	<b>228</b>	558	228	560	227
465.tonto	24	612	386	<b>611</b>	<b>387</b>	607	389	24	589	401	591	400	<b>590</b>	<b>400</b>
470.lbm	24	771	427	<b>772</b>	<b>427</b>	774	426	24	771	427	<b>772</b>	<b>427</b>	774	426
481.wrf	24	645	416	641	418	<b>643</b>	<b>417</b>	24	634	423	<b>635</b>	<b>422</b>	637	421
482.sphinx3	24	<b>1305</b>	<b>358</b>	1304	359	1306	358	24	1391	336	1403	333	<b>1393</b>	<b>336</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 359**

**ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9008

**Test date:** Oct-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-cpu2006 Fri Oct 26 18:41:18 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2630 0 @ 2.30GHz
 2 "physical id"s (chips)
 24 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings   : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal:      132116920 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

uname -a:

```
Linux linux-cpu2006 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 26 05:31 last=S

SPEC is set to: /cpu2006.1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  1.8T   67G  1.8T   4% /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 359**

**ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9008

**Test date:** Oct-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 359**

**ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9008

**Test date:** Oct-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64`

`416.gamess: -DSPEC_CPU_LP64`

`433.milc: -DSPEC_CPU_LP64`

`434.zeusmp: -DSPEC_CPU_LP64`

`435.gromacs: -DSPEC_CPU_LP64 -nofor_main`

`436.cactusADM: -DSPEC_CPU_LP64 -nofor_main`

`437.leslie3d: -DSPEC_CPU_LP64`

`444.namd: -DSPEC_CPU_LP64`

`447.deallI: -DSPEC_CPU_LP64`

`453.povray: -DSPEC_CPU_LP64`

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 359**

**ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9008

**Test date:** Oct-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 359**

**ACTINA SOLAR 220 S5 (Intel Xeon E5-2630)**

**SPECfp\_rate\_base2006 = 351**

**CPU2006 license:** 9008

**Test date:** Oct-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:31:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 December 2012.