



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp®\_rate2006 = 286

ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)

SPECfp\_rate\_base2006 = 277

CPU2006 license: 9008


Test date: Nov-2012

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

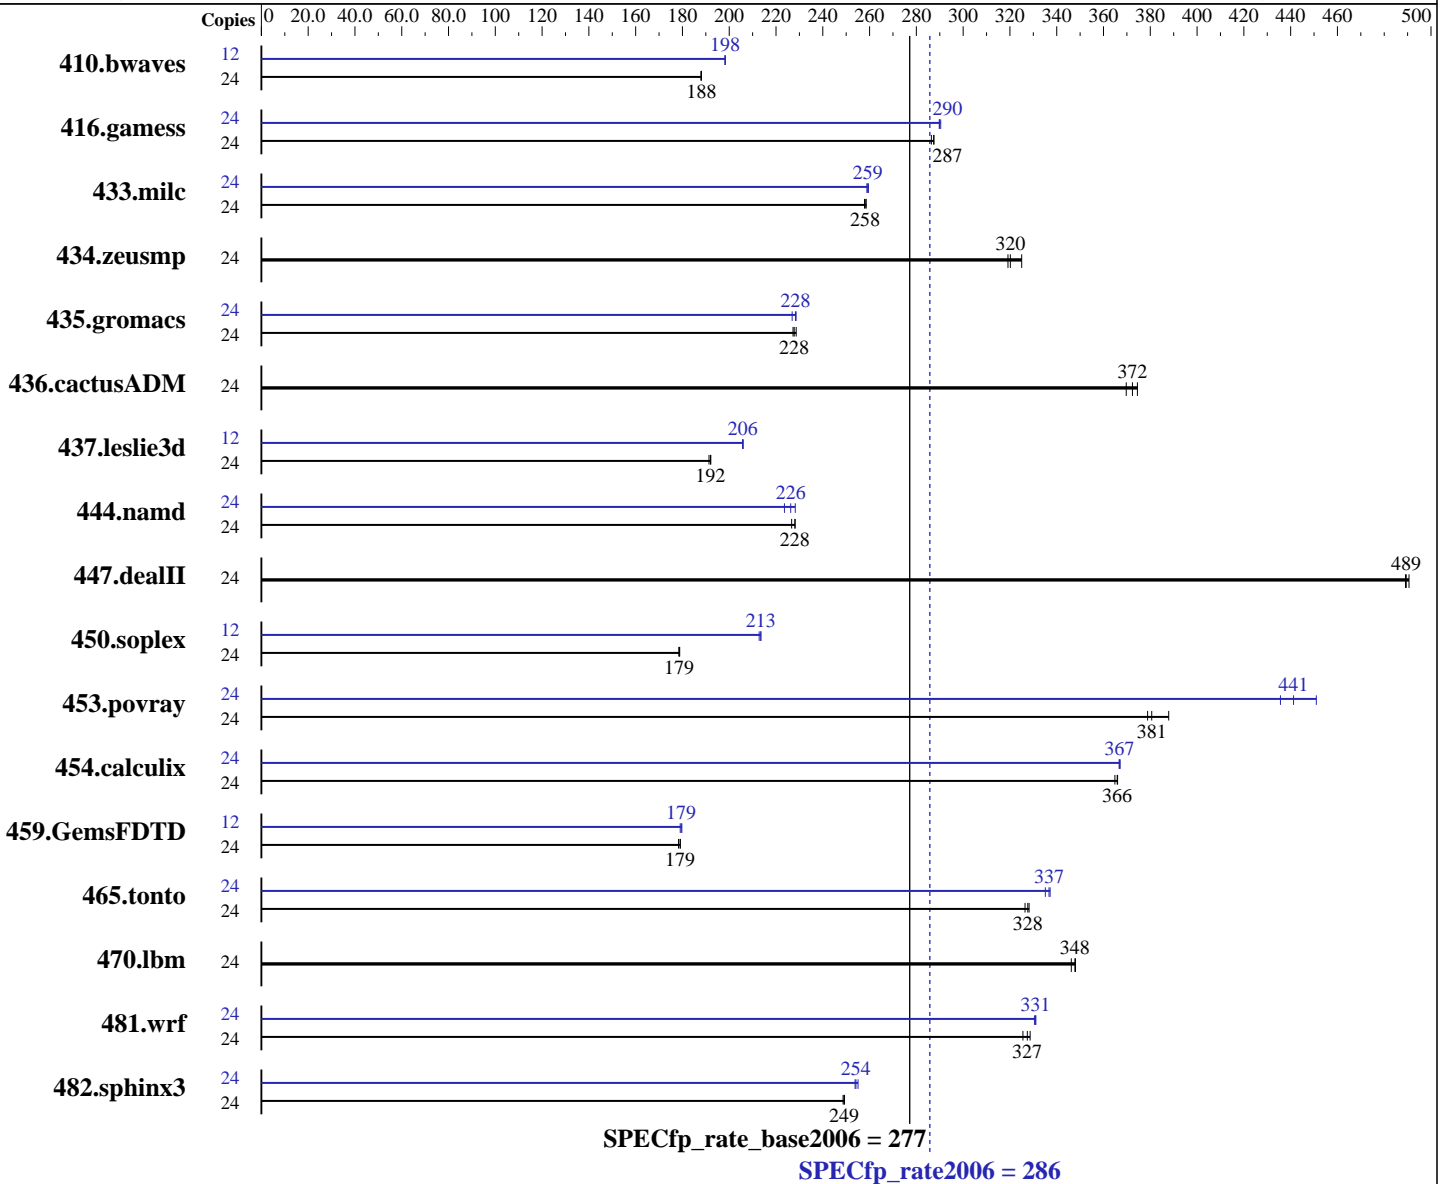

### Hardware

CPU Name: Intel Xeon E5-2420  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp\_rate2006 = 286

ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)

SPECfp\_rate\_base2006 = 277

CPU2006 license: 9008

Test date: Nov-2012

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x SSD OCZ DENEVA II, 240 GB SATA III, MLC  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1734	188	1736	188	<b>1734</b>	<b>188</b>	12	<b>823</b>	<b>198</b>	823	198	822	198		
416.gamess	24	<b>1635</b>	<b>287</b>	1634	288	1641	286	24	<b>1621</b>	<b>290</b>	1622	290	1618	290		
433.milc	24	<b>854</b>	<b>258</b>	852	259	854	258	24	849	260	<b>850</b>	<b>259</b>	851	259		
434.zeusmp	24	<b>682</b>	<b>320</b>	672	325	684	319	24	<b>682</b>	<b>320</b>	672	325	684	319		
435.gromacs	24	750	229	<b>752</b>	<b>228</b>	754	227	24	750	229	755	227	<b>751</b>	<b>228</b>		
436.cactusADM	24	766	374	<b>770</b>	<b>372</b>	776	370	24	766	374	<b>770</b>	<b>372</b>	776	370		
437.leslie3d	24	1174	192	1179	191	<b>1175</b>	<b>192</b>	12	548	206	<b>548</b>	<b>206</b>	548	206		
444.namd	24	<b>844</b>	<b>228</b>	844	228	849	227	24	861	224	<b>851</b>	<b>226</b>	843	228		
447.dealII	24	<b>561</b>	<b>489</b>	560	491	561	489	24	<b>561</b>	<b>489</b>	560	491	561	489		
450.soplex	24	1121	178	<b>1120</b>	<b>179</b>	1119	179	12	469	214	470	213	<b>469</b>	<b>213</b>		
453.povray	24	329	388	<b>335</b>	<b>381</b>	337	379	24	283	451	293	436	<b>289</b>	<b>441</b>		
454.calculix	24	<b>541</b>	<b>366</b>	541	366	543	365	24	539	367	540	367	<b>540</b>	<b>367</b>		
459.GemsFDTD	24	<b>1423</b>	<b>179</b>	1428	178	1422	179	12	708	180	<b>709</b>	<b>179</b>	711	179		
465.tonto	24	723	326	<b>721</b>	<b>328</b>	720	328	24	<b>701</b>	<b>337</b>	700	337	705	335		
470.lbm	24	<b>948</b>	<b>348</b>	952	346	947	348	24	<b>948</b>	<b>348</b>	952	346	947	348		
481.wrf	24	823	326	<b>819</b>	<b>327</b>	816	329	24	811	330	810	331	<b>810</b>	<b>331</b>		
482.sphinx3	24	1881	249	1876	249	<b>1878</b>	<b>249</b>	24	1834	255	<b>1840</b>	<b>254</b>	1843	254		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on linux Tue Nov 13 04:13:10 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 286**

**ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)**

**SPECfp\_rate\_base2006 = 277**

**CPU2006 license:** 9008

**Test date:** Nov-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2420 0 @ 1.90GHz
 2 "physical id"s (chips)
 24 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 6
siblings       : 12
physical 0:    : cores 0 1 2 3 4 5
physical 1:    : cores 0 1 2 3 4 5
cache size     : 15360 KB
```

From /proc/meminfo

```
MemTotal:      98985444 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

uname -a:

```
Linux linux 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012 (d73692b)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 12 12:42 last=S

SPEC is set to: /cpu2006.1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  211G   89G  111G  45% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 286**

**ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)**

**SPECfp\_rate\_base2006 = 277**

**CPU2006 license:** 9008

**Test date:** Nov-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
 Filesystem page cache cleared with:  
 echo 1> /proc/sys/vm/drop\_caches  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 286**

**ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)**

**SPECfp\_rate\_base2006 = 277**

**CPU2006 license:** 9008

**Test date:** Nov-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64`

`416.gamess: -DSPEC_CPU_LP64`

`433.milc: -DSPEC_CPU_LP64`

`434.zeusmp: -DSPEC_CPU_LP64`

`435.gromacs: -DSPEC_CPU_LP64 -nofor_main`

`436.cactusADM: -DSPEC_CPU_LP64 -nofor_main`

`437.leslie3d: -DSPEC_CPU_LP64`

`444.namd: -DSPEC_CPU_LP64`

`447.deallI: -DSPEC_CPU_LP64`

`453.povray: -DSPEC_CPU_LP64`

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 286**

**ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)**

**SPECfp\_rate\_base2006 = 277**

**CPU2006 license:** 9008

**Test date:** Nov-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 286**

**ACTINA SOLAR 215 X5 (Intel Xeon E5-2420)**

**SPECfp\_rate\_base2006 = 277**

**CPU2006 license:** 9008

**Test date:** Nov-2012

**Test sponsor:** ACTION S.A.

**Hardware Availability:** May-2012

**Tested by:** ACTION S.A.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:19:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 December 2012.