



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant SL230s Gen8  
(2.60 GHz, Intel Xeon E5-2670)

**SPECfp®2006 = Not Run**

**SPECfp\_base2006 = 72.8**

**CPU2006 license:** 3


**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Dec-2011

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

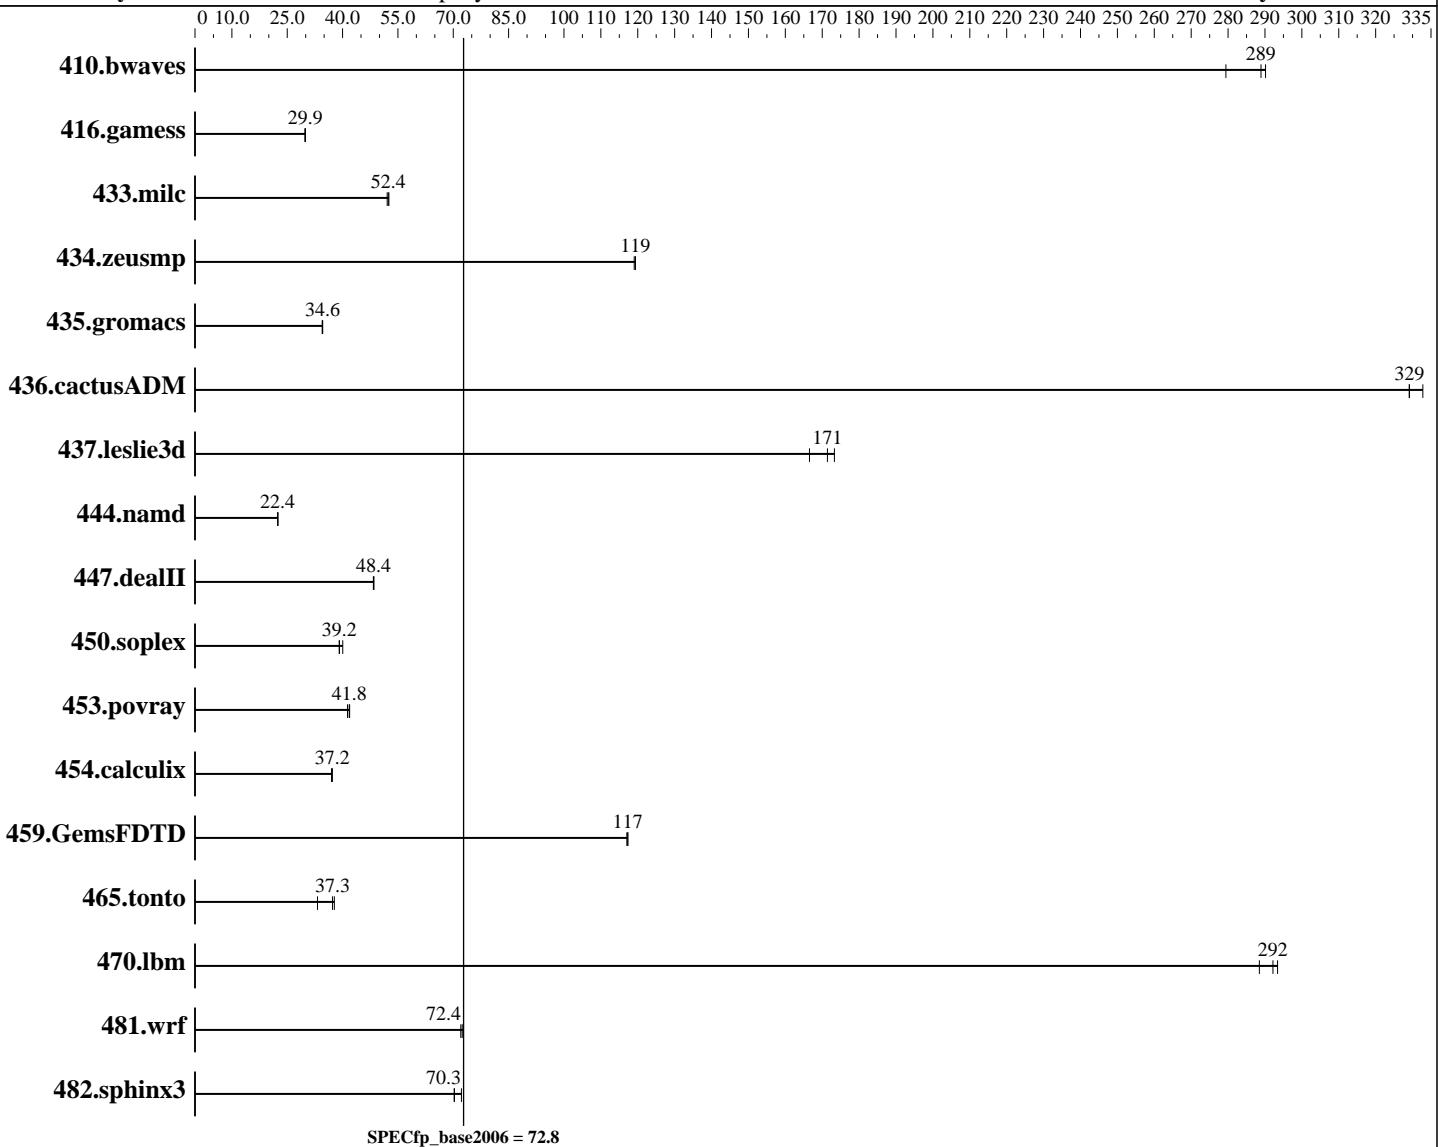

### Hardware

CPU Name: Intel Xeon E5-2670  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant SL230s Gen8  
(2.60 GHz, Intel Xeon E5-2670)

**SPECfp2006 = Not Run**

**SPECfp\_base2006 = 72.8**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Dec-2011

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 750 GB 7.2 K SATA  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48.6	279	46.8	290	<b>47.0</b>	<b>289</b>						
416.gamess	654	29.9	<b>656</b>	<b>29.9</b>	657	29.8						
433.milc	176	52.1	<b>175</b>	<b>52.4</b>	175	52.6						
434.zeusmp	76.4	119	<b>76.2</b>	<b>119</b>	76.2	119						
435.gromacs	<b>207</b>	<b>34.6</b>	206	34.6	207	34.5						
436.cactusADM	36.3	329	<b>36.3</b>	<b>329</b>	35.9	333						
437.leslie3d	<b>54.8</b>	<b>171</b>	54.2	173	56.4	167						
444.namd	<b>357</b>	<b>22.4</b>	358	22.4	357	22.4						
447.dealII	<b>236</b>	<b>48.4</b>	237	48.3	236	48.5						
450.soplex	208	40.0	213	39.1	<b>213</b>	<b>39.2</b>						
453.povray	127	41.9	<b>127</b>	<b>41.8</b>	129	41.3						
454.calculix	223	37.0	222	37.2	<b>222</b>	<b>37.2</b>						
459.GemsFDTD	90.4	117	<b>90.4</b>	<b>117</b>	90.6	117						
465.tonto	261	37.8	296	33.2	<b>264</b>	<b>37.3</b>						
470.lbm	47.6	288	<b>47.0</b>	<b>292</b>	46.8	293						
481.wrf	154	72.7	155	72.0	<b>154</b>	<b>72.4</b>						
482.sphinx3	277	70.2	270	72.2	<b>277</b>	<b>70.3</b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance

Collaborative Power Control set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant SL230s Gen8  
(2.60 GHz, Intel Xeon E5-2670)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**72.8**

**CPU2006 license:** 3

**Test date:** Dec-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## Platform Notes (Continued)

Thermal Configuration set to Increased Cooling  
Intel HyperThreading set to Disabled

```
Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on localhost Fri Dec  9 07:30:54 2011
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings : 8
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:       65937768 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT
2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 9 07:27
```

```
SPEC is set to: /cpu2006
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/sda3        ext4   686G  27G  625G  5%  /
```

Additional information from dmidecode:

```
BIOS HP P75 11/18/2011
Memory:
 16x Not Specified Not Specified 4 GB 1333 MHz 2 rank
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant SL230s Gen8  
(2.60 GHz, Intel Xeon E5-2670)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**72.8**

**CPU2006 license:** 3

**Test date:** Dec-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/cpu2006/lib32:/cpu2006/lib64"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
    434.zeusmp: -DSPEC\_CPU\_LP64  
    435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
    437.leslie3d: -DSPEC\_CPU\_LP64  
        444.namd: -DSPEC\_CPU\_LP64  
        447.dealII: -DSPEC\_CPU\_LP64  
    450.soplex: -DSPEC\_CPU\_LP64  
    453.povray: -DSPEC\_CPU\_LP64  
    454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
    481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant SL230s Gen8  
(2.60 GHz, Intel Xeon E5-2670)

**SPECfp2006 =**

**Not Run**

**SPECfp\_base2006 =**

**72.8**

**CPU2006 license:** 3

**Test date:** Dec-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:20:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 December 2012.