



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp<sup>®</sup>\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

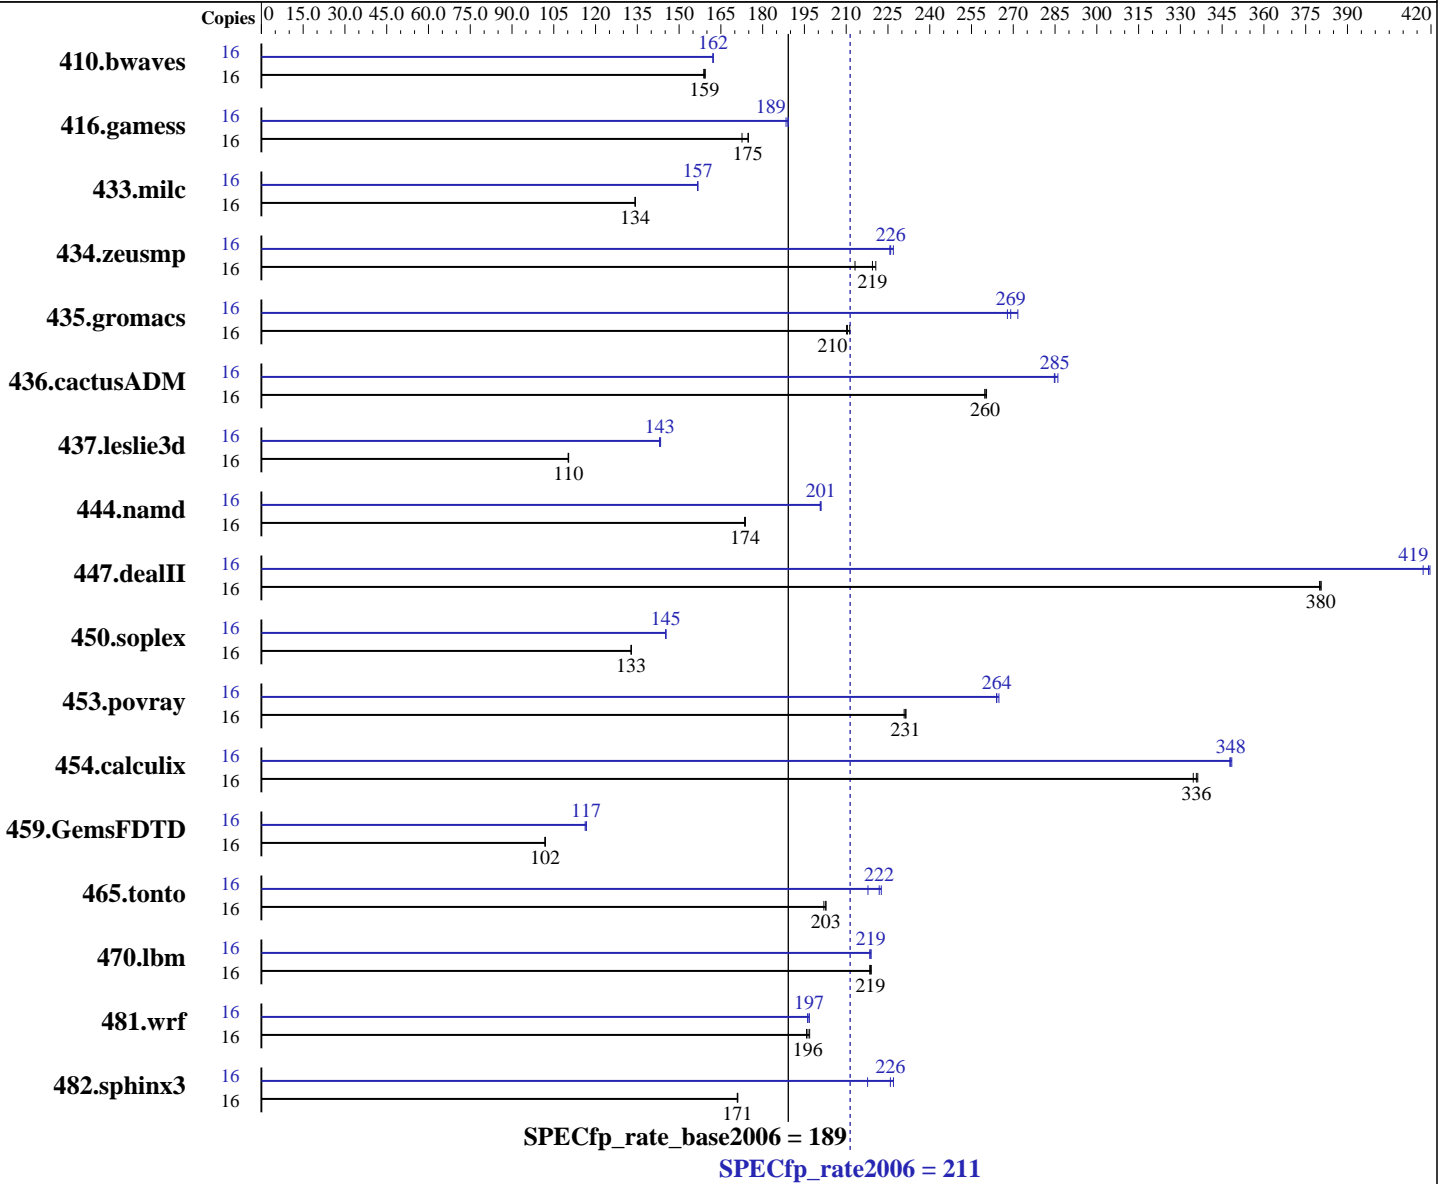

### Hardware

CPU Name: AMD Opteron 6380  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 1 chip, 16 cores/chip  
 CPU(s) orderable: 1 chip

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 2048 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1369	159	<b><u>1366</u></b>	<b><u>159</u></b>	1364	159	16	1340	162	<b><u>1340</u></b>	<b><u>162</u></b>	1341	162
416.gamess	16	<b><u>1793</u></b>	<b><u>175</u></b>	1791	175	1815	173	16	1656	189	1663	188	<b><u>1657</u></b>	<b><u>189</u></b>
433.milc	16	1094	134	<b><u>1094</u></b>	<b><u>134</u></b>	1094	134	16	<b><u>937</u></b>	<b><u>157</u></b>	937	157	938	157
434.zeusmp	16	<b><u>664</u></b>	<b><u>219</u></b>	683	213	660	221	16	642	227	<b><u>644</u></b>	<b><u>226</u></b>	645	226
435.gromacs	16	541	211	544	210	<b><u>543</u></b>	<b><u>210</u></b>	16	426	268	<b><u>425</u></b>	<b><u>269</u></b>	421	272
436.cactusADM	16	734	260	<b><u>736</u></b>	<b><u>260</u></b>	736	260	16	668	286	671	285	<b><u>671</u></b>	<b><u>285</u></b>
437.leslie3d	16	<b><u>1364</u></b>	<b><u>110</u></b>	1363	110	1365	110	16	1049	143	1051	143	<b><u>1051</u></b>	<b><u>143</u></b>
444.namd	16	<b><u>739</u></b>	<b><u>174</u></b>	739	174	738	174	16	639	201	<b><u>639</u></b>	<b><u>201</u></b>	639	201
447.dealII	16	481	381	<b><u>481</u></b>	<b><u>380</u></b>	482	380	16	436	420	439	417	<b><u>437</u></b>	<b><u>419</u></b>
450.soplex	16	1005	133	1004	133	<b><u>1005</u></b>	<b><u>133</u></b>	16	919	145	<b><u>919</u></b>	<b><u>145</u></b>	919	145
453.povray	16	369	231	<b><u>368</u></b>	<b><u>231</u></b>	368	231	16	<b><u>322</u></b>	<b><u>264</u></b>	321	265	322	264
454.calculix	16	394	335	<b><u>393</u></b>	<b><u>336</u></b>	393	336	16	379	348	380	348	<b><u>379</u></b>	<b><u>348</u></b>
459.GemsFDTD	16	1664	102	1667	102	<b><u>1666</u></b>	<b><u>102</u></b>	16	1460	116	<b><u>1455</u></b>	<b><u>117</u></b>	1455	117
465.tonto	16	<b><u>777</u></b>	<b><u>203</u></b>	779	202	777	203	16	707	223	<b><u>710</u></b>	<b><u>222</u></b>	723	218
470.lbm	16	<b><u>1005</u></b>	<b><u>219</u></b>	1004	219	1006	218	16	<b><u>1005</u></b>	<b><u>219</u></b>	1004	219	1006	218
481.wrf	16	908	197	<b><u>911</u></b>	<b><u>196</u></b>	913	196	16	908	197	<b><u>909</u></b>	<b><u>197</u></b>	911	196
482.sphinx3	16	1823	171	1825	171	<b><u>1823</u></b>	<b><u>171</u></b>	16	<b><u>1381</u></b>	<b><u>226</u></b>	1374	227	1432	218

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/usr/cpu2006/amd1206-rate-libs-revA/32:/usr/cpu2006/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

### C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

### Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

### Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Aug-2012  
Hardware Availability: Nov-2012  
Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on  
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m  
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0  
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off  
-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3  
-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500  
-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2  
-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024  
-OPT:unroll\_times\_max=16 -LNO:fission=2  
-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525  
-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m  
-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on  
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0  
-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m  
-march=bdver1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6380)

SPECfp\_rate2006 = 211

SPECfp\_rate\_base2006 = 189

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:38:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.