



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp[®]_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

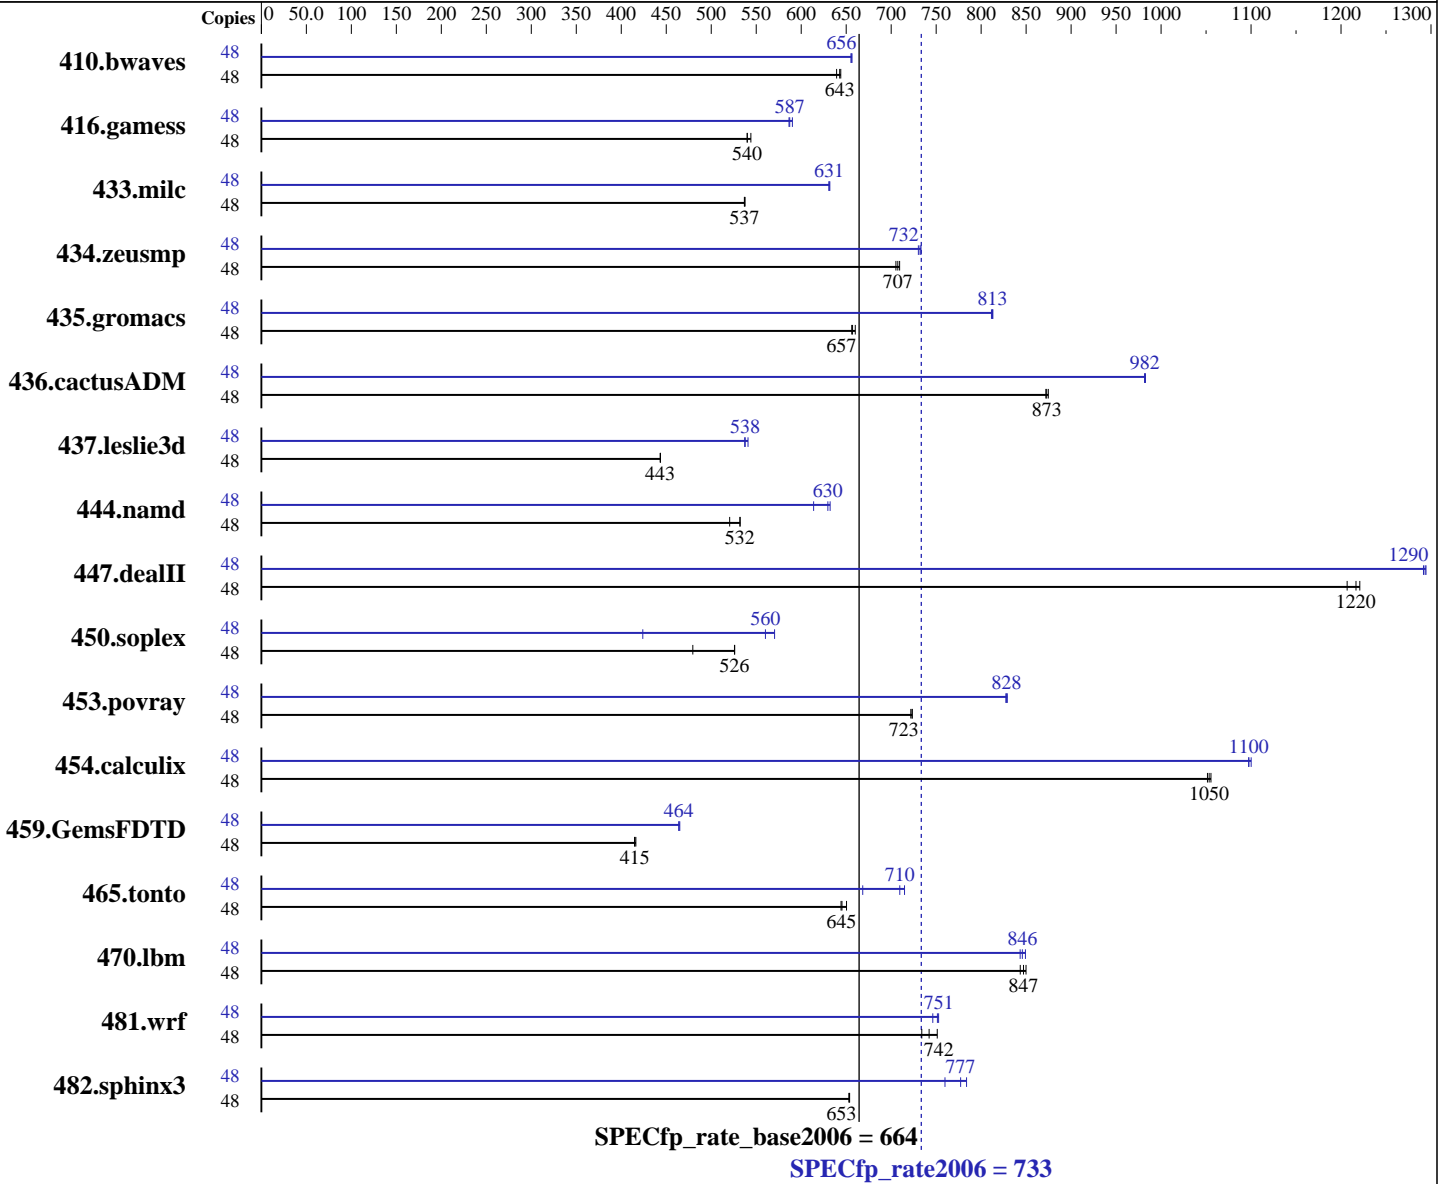

Hardware

CPU Name: AMD Opteron 6344
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1020	639	<u>1015</u>	<u>643</u>	1013	644	48	994	656	<u>995</u>	<u>656</u>	995	656
416.gamess	48	1740	540	1727	544	<u>1740</u>	<u>540</u>	48	1603	586	1592	590	<u>1600</u>	<u>587</u>
433.milc	48	<u>820</u>	<u>537</u>	820	538	821	537	48	<u>698</u>	<u>631</u>	697	632	698	631
434.zeusmp	48	619	705	<u>618</u>	<u>707</u>	616	709	48	<u>597</u>	<u>732</u>	596	733	598	730
435.gromacs	48	519	660	<u>522</u>	<u>657</u>	522	656	48	422	811	422	813	<u>422</u>	<u>813</u>
436.cactusADM	48	658	872	656	875	<u>657</u>	<u>873</u>	48	584	983	584	982	<u>584</u>	<u>982</u>
437.leslie3d	48	<u>1018</u>	<u>443</u>	1018	443	1017	444	48	<u>839</u>	<u>538</u>	840	537	834	541
444.namd	48	740	521	723	532	<u>724</u>	<u>532</u>	48	627	614	<u>611</u>	<u>630</u>	609	632
447.dealII	48	450	1220	455	1210	<u>451</u>	<u>1220</u>	48	425	1290	<u>425</u>	<u>1290</u>	424	1290
450.soplex	48	835	480	761	526	<u>761</u>	<u>526</u>	48	944	424	<u>715</u>	<u>560</u>	702	570
453.povray	48	353	723	354	722	<u>353</u>	<u>723</u>	48	309	827	<u>308</u>	<u>828</u>	308	829
454.calculix	48	375	1060	377	1050	<u>376</u>	<u>1050</u>	48	360	1100	361	1100	<u>361</u>	<u>1100</u>
459.GemsFDTD	48	1224	416	<u>1227</u>	<u>415</u>	1228	415	48	1095	465	<u>1097</u>	<u>464</u>	1098	464
465.tonto	48	<u>732</u>	<u>645</u>	726	650	733	644	48	<u>666</u>	<u>710</u>	707	668	661	715
470.lbm	48	782	843	776	850	<u>779</u>	<u>847</u>	48	782	843	777	849	<u>780</u>	<u>846</u>
481.wrf	48	730	734	714	751	<u>722</u>	<u>742</u>	48	718	746	<u>714</u>	<u>751</u>	712	753
482.sphinx3	48	1432	653	<u>1432</u>	<u>653</u>	1431	654	48	<u>1204</u>	<u>777</u>	1194	784	1231	760

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=43008 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
 -IPA:plimit=7000 -IPA:callee_limit=1200
 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
 -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
 -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
 -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
 -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
 -march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on

-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local_sched_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024

-OPT:unroll_times_max=16 -LNO:fission=2

-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off

-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1

-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint

-GRA:optimize_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 733

SPECfp_rate_base2006 = 664

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:22:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.