



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**SPECfp<sup>®</sup>\_rate2006 = 180**

**SPECfp\_rate\_base2006 = 177**

**CPU2006 license:** 9019


**Test date:** Nov-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

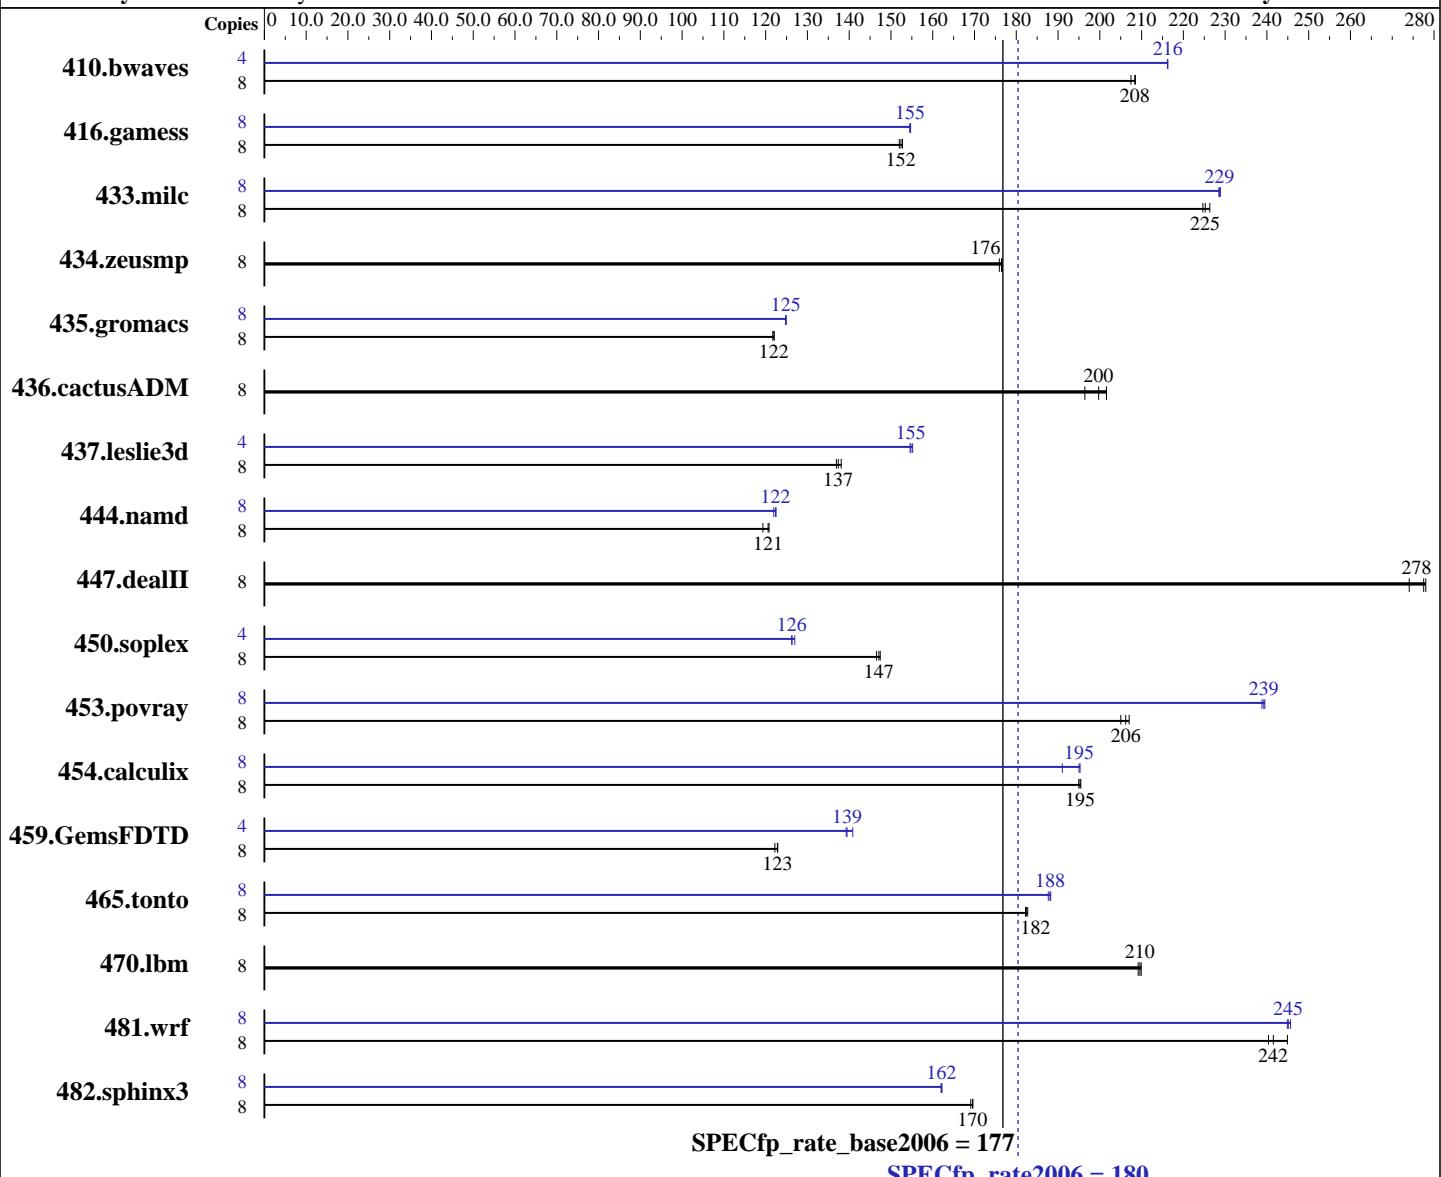

### Hardware

CPU Name: Intel Xeon E5-2637  
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
CPU MHz: 3000  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**SPECfp\_rate2006 = 180**

**SPECfp\_rate\_base2006 = 177**

**CPU2006 license:** 9019

**Test date:** Nov-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

L3 Cache: 5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 600 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	524	207	<b>522</b>	<b>208</b>	521	209	4	251	216	251	216	<b>251</b>	<b>216</b>
416.gamess	8	1025	153	1031	152	<b>1028</b>	<b>152</b>	8	1014	155	1013	155	<b>1013</b>	<b>155</b>
433.milc	8	<b>326</b>	<b>225</b>	327	225	324	226	8	321	229	<b>321</b>	<b>229</b>	321	229
434.zeusmp	8	412	177	414	176	<b>413</b>	<b>176</b>	8	412	177	414	176	<b>413</b>	<b>176</b>
435.gromacs	8	469	122	<b>468</b>	<b>122</b>	468	122	8	458	125	<b>458</b>	<b>125</b>	457	125
436.cactusADM	8	<b>479</b>	<b>200</b>	474	202	487	196	8	<b>479</b>	<b>200</b>	474	202	487	196
437.leslie3d	8	<b>547</b>	<b>137</b>	549	137	545	138	4	<b>243</b>	<b>155</b>	243	155	242	155
444.namd	8	531	121	538	119	<b>532</b>	<b>121</b>	8	<b>524</b>	<b>122</b>	526	122	524	122
447.dealII	8	334	274	329	278	<b>330</b>	<b>278</b>	8	334	274	329	278	<b>330</b>	<b>278</b>
450.soplex	8	455	147	453	147	<b>454</b>	<b>147</b>	4	264	126	263	127	<b>264</b>	<b>126</b>
453.povray	8	206	207	<b>206</b>	<b>206</b>	208	205	8	178	239	<b>178</b>	<b>239</b>	178	240
454.calculix	8	<b>338</b>	<b>195</b>	338	195	339	195	8	346	191	338	195	<b>338</b>	<b>195</b>
459.GemsFDTD	8	695	122	<b>691</b>	<b>123</b>	691	123	4	<b>304</b>	<b>139</b>	305	139	301	141
465.tonto	8	<b>432</b>	<b>182</b>	432	182	431	183	8	419	188	418	188	<b>419</b>	<b>188</b>
470.lbm	8	<b>524</b>	<b>210</b>	525	209	524	210	8	<b>524</b>	<b>210</b>	525	209	524	210
481.wrf	8	365	245	372	240	<b>370</b>	<b>242</b>	8	364	246	<b>365</b>	<b>245</b>	365	245
482.sphinx3	8	922	169	919	170	<b>920</b>	<b>170</b>	8	962	162	961	162	<b>962</b>	<b>162</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
 Processor C6 Report set to Disabled  
 Processor C1E set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**SPECfp\_rate2006 = 180**

**CPU2006 license:** 9019  
**Test sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**SPECfp\_rate\_base2006 = 177**

**Test date:** Nov-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Feb-2012

## Platform Notes (Continued)

CPU Performance set to HPC  
LV DDR Mode set to Performance-mode  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Tue Nov 27 02:11:11 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2637 0 @ 3.00GHz
        2 "physical id"s (chips)
        8 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 2
        siblings : 4
        physical 0: cores 0 1
        physical 1: cores 0 1
    cache size : 5120 KB
```

```
From /proc/meminfo
    MemTotal:      132102444 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
    EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 27 02:09
```

```
SPEC is set to: /opt/cpu2006-1.2
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sdal      ext4   550G  9.9G  512G   2%  /
```

Additional information from dmidecode:

```
Memory:
    16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**SPECfp\_rate2006 = 180**

**SPECfp\_rate\_base2006 = 177**

**CPU2006 license:** 9019

**Test date:** Nov-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Jun-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology = enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECfp\_rate2006 = 180**

**SPECfp\_rate\_base2006 = 177**

**Test date:** Nov-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: 

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: 

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: 

```
-DSPEC_CPU_LP64
```

  
416.gamess: 

```
-DSPEC_CPU_LP64
```

  
433.milc: 

```
-DSPEC_CPU_LP64
```

  
434.zeusmp: 

```
-DSPEC_CPU_LP64
```

  
435.gromacs: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
436.cactusADM: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
437.leslie3d: 

```
-DSPEC_CPU_LP64
```

  
444.namd: 

```
-DSPEC_CPU_LP64
```

  
447.dealII: 

```
-DSPEC_CPU_LP64
```

  
453.povray: 

```
-DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**SPECfp\_rate2006 = 180**

**SPECfp\_rate\_base2006 = 177**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
           -opt-mem-layout-trans=3
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xsSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
              -unroll2
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
             -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -static
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep- -static
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2637, 3.0 GHz)

**SPECfp\_rate2006 = 180**

**SPECfp\_rate\_base2006 = 177**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:41:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 January 2013.