



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55


Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

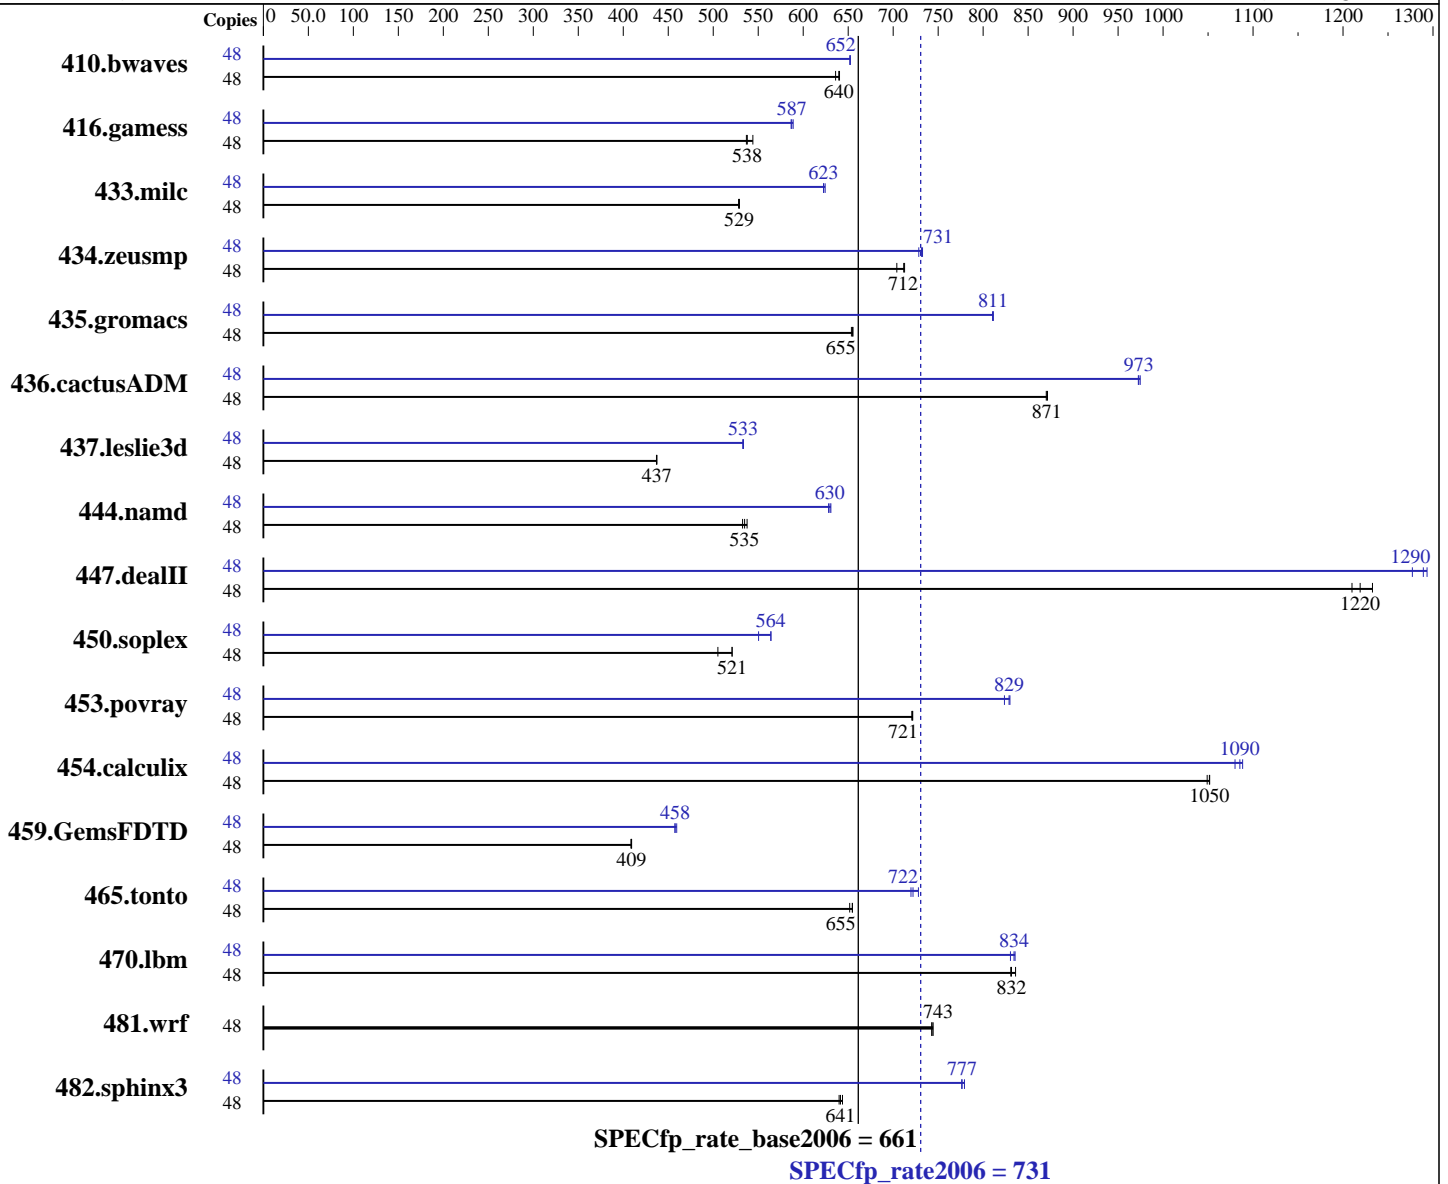

### Hardware

CPU Name: AMD Opteron 6344  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip  
 CPU(s) orderable: 2,4 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 6 x 73 GB 7200 RPM SATA

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	48	1026	636	<b><u>1020</u></b>	<b><u>640</u></b>	1019	640	48	1000	652	1000	652	<b><u>1000</u></b>	<b><u>652</u></b>		
416.gamess	48	1751	537	<b><u>1747</u></b>	<b><u>538</u></b>	1727	544	48	1596	589	1602	587	<b><u>1600</u></b>	<b><u>587</u></b>		
433.milc	48	834	528	<b><u>833</u></b>	<b><u>529</u></b>	833	529	48	<b><u>708</u></b>	<b><u>623</u></b>	708	623	706	624		
434.zeusmp	48	620	704	<b><u>614</u></b>	<b><u>712</u></b>	613	713	48	596	733	600	728	<b><u>597</u></b>	<b><u>731</u></b>		
435.gromacs	48	523	655	<b><u>523</u></b>	<b><u>655</u></b>	524	654	48	422	811	<b><u>423</u></b>	<b><u>811</u></b>	423	810		
436.cactusADM	48	<b><u>659</u></b>	<b><u>871</u></b>	658	872	659	870	48	589	975	<b><u>590</u></b>	<b><u>973</u></b>	590	973		
437.leslie3d	48	1032	437	1033	437	<b><u>1032</u></b>	<b><u>437</u></b>	48	<b><u>846</u></b>	<b><u>533</u></b>	847	533	846	534		
444.namd	48	716	538	723	533	<b><u>720</u></b>	<b><u>535</u></b>	48	613	628	<b><u>611</u></b>	<b><u>630</u></b>	610	631		
447.dealII	48	<b><u>450</u></b>	<b><u>1220</u></b>	454	1210	445	1230	48	430	1280	425	1290	<b><u>426</u></b>	<b><u>1290</u></b>		
450.soplex	48	792	505	768	521	<b><u>769</u></b>	<b><u>521</u></b>	48	727	550	710	564	<b><u>710</u></b>	<b><u>564</u></b>		
453.povray	48	354	721	354	722	<b><u>354</u></b>	<b><u>721</u></b>	48	<b><u>308</u></b>	<b><u>829</u></b>	310	824	308	830		
454.calculix	48	378	1050	377	1050	<b><u>377</u></b>	<b><u>1050</u></b>	48	<b><u>365</u></b>	<b><u>1090</u></b>	367	1080	364	1090		
459.GemsFDTD	48	1247	409	1244	409	<b><u>1245</u></b>	<b><u>409</u></b>	48	1109	459	<b><u>1113</u></b>	<b><u>458</u></b>	1113	457		
465.tonto	48	<b><u>722</u></b>	<b><u>655</u></b>	725	652	721	655	48	649	728	<b><u>654</u></b>	<b><u>722</u></b>	656	720		
470.lbm	48	794	831	<b><u>793</u></b>	<b><u>832</u></b>	789	836	48	794	830	789	836	<b><u>791</u></b>	<b><u>834</u></b>		
481.wrf	48	722	743	<b><u>721</u></b>	<b><u>743</u></b>	720	744	48	722	743	<b><u>721</u></b>	<b><u>743</u></b>	720	744		
482.sphinx3	48	1462	640	1453	644	<b><u>1458</u></b>	<b><u>641</u></b>	48	<b><u>1205</u></b>	<b><u>777</u></b>	1205	776	1201	779		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=43008 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
 -fno-second-underscore

## Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs\_best=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=7000 -IPA:callee\_limit=1200  
 -OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso  
 -march=bdver1

470.lbm: -Ofast -CG:cmp\_peep=on -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=8000 -IPA:small\_pu=100 -march=bdver1 -mso

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -m32 -IPA:plimit=1000 -OPT:malloc\_alg=2 -CG:cmp\_peep=on  
 -CG:p2align=0 -CG:load\_exe=1 -CG:dsched=on  
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch\_ahead=4  
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=0 -CG:load\_exe=0 -OPT:unroll\_size=256  
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if\_select\_conv=1  
 -OPT:alias=disjoint -LNO:psimd\_iso\_unroll=ON -march=bdver1

447.dealIII: -Ofast -D\_\_OPEN64\_FAST\_SET -static -INLINE:aggressive=on  
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -CG:movext\_icmp=off -TENV:frame\_pointer=off  
 -march=bdver1

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:ignore\_feedback=off -INLINE:aggressive=on -OPT:RO=1  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on

-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024

-OPT:unroll\_times\_max=16 -LNO:fission=2

-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off

-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1

-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint

-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 731

PowerEdge R815 (AMD Opteron 6344, 2.60 GHz)

SPECfp\_rate\_base2006 = 661

CPU2006 license: 55

Test date: Nov-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

481.wrf:basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:49:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 January 2013.