



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itaotec

### SPECfp<sup>®</sup>\_rate2006 = 182

### Servidor Itaotec LX205 (Intel Xeon E5-2603)

### SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001


Test sponsor: Itaotec

Tested by: Itaotec

Test date: Jan-2013

Hardware Availability: Jun-2012

Software Availability: Jun-2012

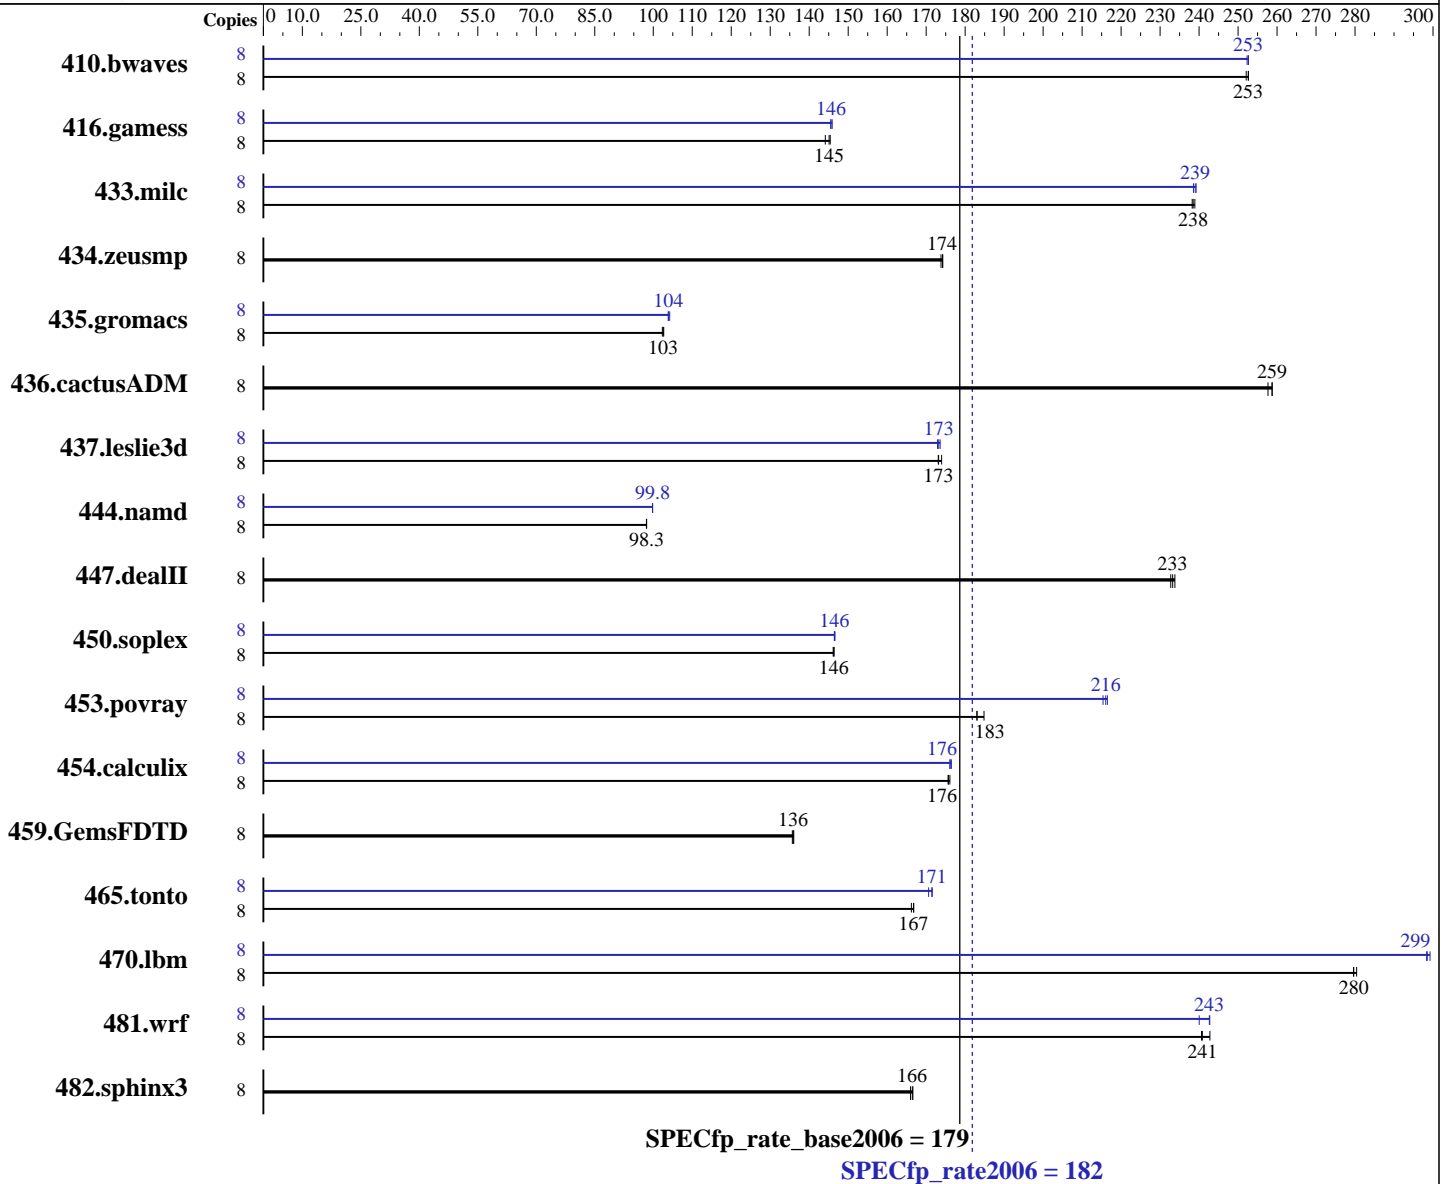

### Hardware

CPU Name: Intel Xeon E5-2603  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 182

Servidor Itaotec LX205 (Intel Xeon E5-2603)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jan-2013  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-11, ECC, running at 1066 MHz and CL7)  
Disk Subsystem: 3 x 300 GB, SAS, 15000 RPM, RAID 0  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	<b>430</b>	<b>253</b>	430	253	431	252	8	<b>430</b>	<b>253</b>	431	252	430	253		
416.gamess	8	<b>1080</b>	<b>145</b>	1087	144	1077	145	8	1074	146	<b>1076</b>	<b>146</b>	1077	146		
433.milc	8	<b>308</b>	<b>238</b>	308	238	307	239	8	308	239	307	239	<b>307</b>	<b>239</b>		
434.zeusmp	8	418	174	419	174	<b>418</b>	<b>174</b>	8	418	174	419	174	<b>418</b>	<b>174</b>		
435.gromacs	8	556	103	558	102	<b>557</b>	<b>103</b>	8	548	104	550	104	<b>550</b>	<b>104</b>		
436.cactusADM	8	<b>370</b>	<b>259</b>	371	258	369	259	8	<b>370</b>	<b>259</b>	371	258	369	259		
437.leslie3d	8	434	173	<b>434</b>	<b>173</b>	432	174	8	433	174	435	173	<b>434</b>	<b>173</b>		
444.namd	8	653	98.2	653	98.3	<b>653</b>	<b>98.3</b>	8	<b>643</b>	<b>99.8</b>	643	99.8	643	99.8		
447.dealII	8	391	234	393	233	<b>392</b>	<b>233</b>	8	391	234	393	233	<b>392</b>	<b>233</b>		
450.soplex	8	457	146	456	146	<b>456</b>	<b>146</b>	8	455	147	456	146	<b>455</b>	<b>146</b>		
453.povray	8	230	185	<b>233</b>	<b>183</b>	233	183	8	198	215	197	216	<b>197</b>	<b>216</b>		
454.calculix	8	375	176	376	176	<b>376</b>	<b>176</b>	8	<b>375</b>	<b>176</b>	374	176	375	176		
459.GemsFDTD	8	<b>625</b>	<b>136</b>	624	136	626	136	8	<b>625</b>	<b>136</b>	624	136	626	136		
465.tonto	8	<b>472</b>	<b>167</b>	472	167	474	166	8	459	172	<b>459</b>	<b>171</b>	461	171		
470.lbm	8	<b>393</b>	<b>280</b>	392	280	393	280	8	367	299	<b>368</b>	<b>299</b>	368	298		
481.wrf	8	368	243	<b>371</b>	<b>241</b>	371	241	8	<b>368</b>	<b>243</b>	368	243	372	240		
482.sphinx3	8	939	166	936	167	<b>937</b>	<b>166</b>	8	939	166	936	167	<b>937</b>	<b>166</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c  
running on itaotec.fam5 Fri Jan 25 03:23:39 2013  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 182

Servidor Itautec LX205 (Intel Xeon E5-2603)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001

Test date: Jan-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jun-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
 cache size : 10240 KB

```

```

From /proc/meminfo
MemTotal:      65946096 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux itautec.fam5 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 24 15:42

```

SPEC is set to: /home/rcaneca/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_itaotec-lv_home
ext4           743G    2.1G  704G   1% /home

```

(End of data from sysinfo program)

## General Notes

This result was measured on the Servidor Itautec MX205. The Servidor Itautec MX205, the Servidor Itautec MX225+ and the Servidor Itautec LX205 are electronically equivalent.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 182

Servidor Itaotec LX205 (Intel Xeon E5-2603)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jan-2013  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 182

Servidor Itaotec LX205 (Intel Xeon E5-2603)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Jan-2013  
Hardware Availability: Jun-2012  
Software Availability: Jun-2012

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 182

Servidor Itaotec LX205 (Intel Xeon E5-2603)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001

Test date: Jan-2013

Test sponsor: Itaotec

Hardware Availability: Jun-2012

Tested by: Itaotec

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -auto-ilp32  
-opt-mem-layout-trans=3

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-  
-static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 182

Servidor Itaotec LX205 (Intel Xeon E5-2603)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 9001

Test sponsor: Itaotec

Tested by: Itaotec

Test date: Jan-2013

Hardware Availability: Jun-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itaotec-Servidor\\_Itaotec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.html)

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itaotec-Servidor\\_Itaotec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.xml)

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:03:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 February 2013.