



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038AD-T (C7Z87-OCE, Intel Core i7-4770, 3.40 GHz)

SPECint[®]2006 = 62.7

SPECint_base2006 = 60.2

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

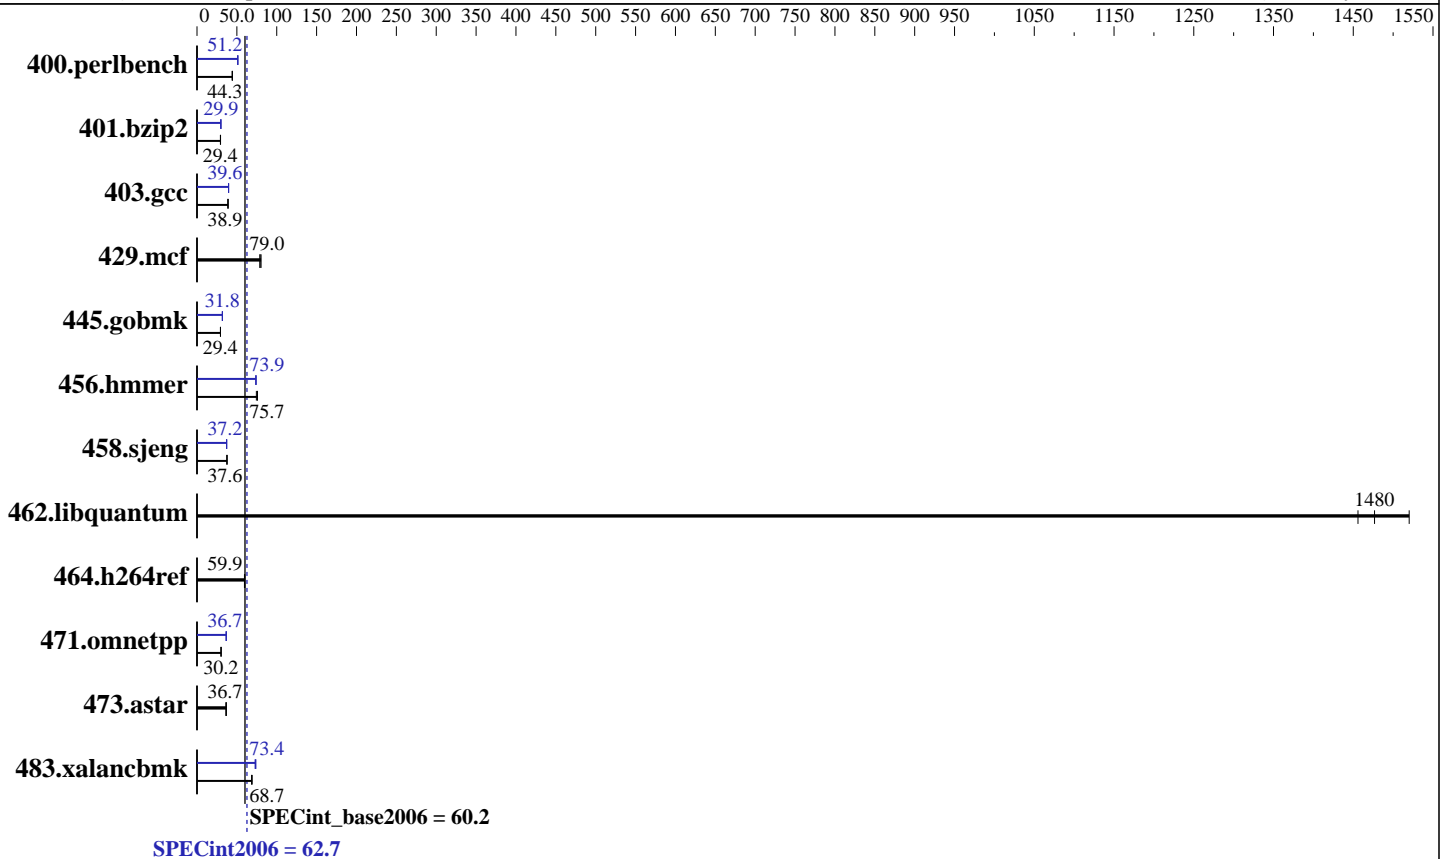

Hardware

CPU Name: Intel Core i7-4770
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 x 300 GB SATA II, 10000 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038AD-T (C7Z87-OCE, Intel Core i7-4770, 3.40 GHz)

SPECint2006 = **62.7**

SPECint_base2006 = **60.2**

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2013
Hardware Availability: Jun-2013
Software Availability: May-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>221</u>	<u>44.3</u>	221	44.2	220	44.4	191	51.2	<u>191</u>	<u>51.2</u>	191	51.1
401.bzip2	328	29.4	327	29.5	<u>328</u>	<u>29.4</u>	<u>322</u>	<u>29.9</u>	323	29.9	322	30.0
403.gcc	207	39.0	<u>207</u>	<u>38.9</u>	208	38.8	203	39.7	204	39.5	<u>203</u>	<u>39.6</u>
429.mcf	113	80.4	<u>115</u>	<u>79.0</u>	116	79.0	113	80.4	<u>115</u>	<u>79.0</u>	116	79.0
445.gobmk	357	29.4	356	29.5	<u>357</u>	<u>29.4</u>	<u>329</u>	<u>31.8</u>	329	31.8	330	31.8
456.hammer	123	75.8	125	74.4	<u>123</u>	<u>75.7</u>	126	73.8	<u>126</u>	<u>73.9</u>	126	74.1
458.sjeng	<u>322</u>	<u>37.6</u>	322	37.6	322	37.6	325	37.2	<u>326</u>	<u>37.2</u>	326	37.1
462.libquantum	14.2	1460	<u>14.0</u>	<u>1480</u>	13.6	1520	14.2	1460	<u>14.0</u>	<u>1480</u>	13.6	1520
464.h264ref	<u>370</u>	<u>59.9</u>	372	59.5	369	59.9	<u>370</u>	<u>59.9</u>	372	59.5	369	59.9
471.omnetpp	<u>207</u>	<u>30.2</u>	207	30.2	207	30.2	170	36.7	<u>170</u>	<u>36.7</u>	171	36.6
473.astar	193	36.3	<u>191</u>	<u>36.7</u>	191	36.7	193	36.3	<u>191</u>	<u>36.7</u>	191	36.7
483.xalancbmk	99.9	69.1	<u>100</u>	<u>68.7</u>	101	68.5	93.4	73.9	<u>94.0</u>	<u>73.4</u>	94.7	72.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038AD-T (C7Z87-OCE, Intel Core i7-4770, 3.40 GHz)

SPECint2006 = 62.7

SPECint_base2006 = 60.2

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038AD-T (C7Z87-OCE, Intel Core i7-4770, 3.40 GHz)

SPECint2006 = 62.7

SPECint_base2006 = 60.2

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

```

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038AD-T (C7Z87-OCE, Intel Core i7-4770, 3.40 GHz)

SPECint2006 = 62.7

SPECint_base2006 = 60.2

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2013

Hardware Availability: Jun-2013

Software Availability: May-2013

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.20130702.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:42:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 July 2013.