



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

**SPECfp®\_rate2006 = 709**

CPU2006 license: 3175


**Test date:** Aug-2013

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2013

**Tested by:** Huawei

**Software Availability:** Feb-2013

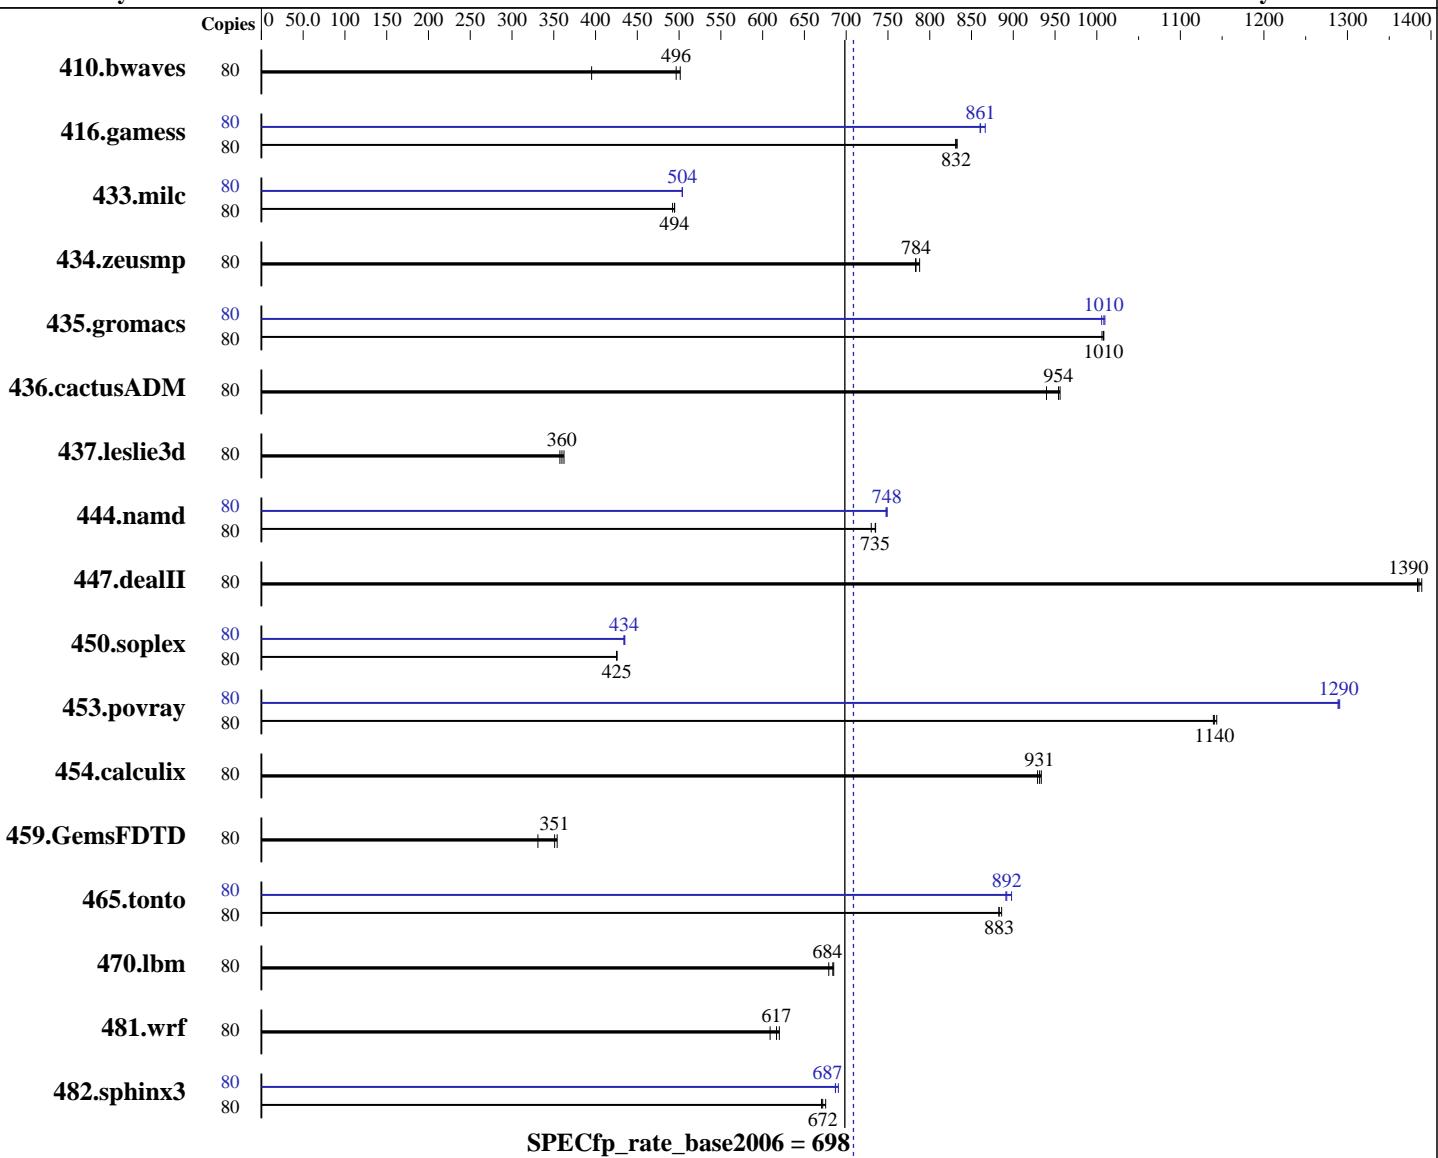

## Hardware

CPU Name: Intel Xeon E7-4870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: 2.6.32-358.el6.x86\_64  
 C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux;  
 Fortran: Version 13.1.1.163 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 709**

Huawei E9000 CH242 (Intel Xeon E7-4870)

**SPECfp\_rate\_base2006 = 698**

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Aug-2013

Tested by: Huawei

Software Availability: Feb-2013

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	2168	501	<b>2190</b>	<b>496</b>	2751	395	80	2168	501	<b>2190</b>	<b>496</b>	2751	395
416.gamess	80	1885	831	<b>1883</b>	<b>832</b>	1881	833	80	1821	860	1808	866	<b>1820</b>	<b>861</b>
433.milc	80	1484	495	1492	492	<b>1485</b>	<b>494</b>	80	1457	504	<b>1457</b>	<b>504</b>	1458	504
434.zeusmp	80	<b>929</b>	<b>784</b>	924	788	930	783	80	<b>929</b>	<b>784</b>	924	788	930	783
435.gromacs	80	<b>567</b>	<b>1010</b>	566	1010	568	1010	80	<b>566</b>	<b>1010</b>	568	1010	566	1010
436.cactusADM	80	1000	956	<b>1002</b>	<b>954</b>	1017	940	80	1000	956	<b>1002</b>	<b>954</b>	1017	940
437.leslie3d	80	2104	357	<b>2090</b>	<b>360</b>	2076	362	80	2104	357	<b>2090</b>	<b>360</b>	2076	362
444.namd	80	873	735	879	730	<b>873</b>	<b>735</b>	80	857	749	858	748	<b>857</b>	<b>748</b>
447.dealII	80	659	1390	661	1380	<b>661</b>	<b>1390</b>	80	659	1390	661	1380	<b>661</b>	<b>1390</b>
450.soplex	80	1568	426	<b>1569</b>	<b>425</b>	1569	425	80	<b>1536</b>	<b>434</b>	1537	434	1534	435
453.povray	80	372	1140	373	1140	<b>373</b>	<b>1140</b>	80	330	1290	330	1290	<b>330</b>	<b>1290</b>
454.calculix	80	707	934	<b>709</b>	<b>931</b>	710	929	80	707	934	<b>709</b>	<b>931</b>	710	929
459.GemsFDTD	80	2564	331	2397	354	<b>2418</b>	<b>351</b>	80	2564	331	2397	354	<b>2418</b>	<b>351</b>
465.tonto	80	892	883	888	886	<b>891</b>	<b>883</b>	80	877	898	883	891	<b>882</b>	<b>892</b>
470.lbm	80	1604	685	<b>1607</b>	<b>684</b>	1619	679	80	1604	685	<b>1607</b>	<b>684</b>	1619	679
481.wrf	80	<b>1449</b>	<b>617</b>	1468	609	1441	620	80	<b>1449</b>	<b>617</b>	1468	609	1441	620
482.sphinx3	80	2326	670	<b>2321</b>	<b>672</b>	2308	675	80	<b>2258</b>	<b>691</b>	2269	687	<b>2269</b>	<b>687</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

Baseboard Management Controller used to adjust the fan speed to 100%

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp\_rate2006 = 709

SPECfp\_rate\_base2006 = 698

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Platform Notes (Continued)

```
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$
running on spec Thu Aug  8 03:18:33 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7- 4870 @ 2.40GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings : 20
    physical 0: cores 0 1 2 8 9 16 17 18 24 25
    physical 1: cores 0 1 2 8 9 16 17 18 24 25
    physical 2: cores 0 1 2 8 9 16 17 18 24 25
    physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      264358860 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux spec 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 7 10:15
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  250G   89G  149G  38%  /
```

Additional information from dmidecode:

```
Memory:
 32x RAMAXEL RMS6031EC64FAF1333 8 GB 1067 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 709**

**SPECfp\_rate\_base2006 = 698**

**Test date:** Aug-2013

**Hardware Availability:** Aug-2013

**Software Availability:** Feb-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 709**

**SPECfp\_rate\_base2006 = 698**

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 709**

**SPECfp\_rate\_base2006 = 698**

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 709**

**SPECfp\_rate\_base2006 = 698**

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
           -inline-alloc -opt-malloc-options=3
           -B /usr/share/libhugetlbfss/ -Wl,-melf_x86_64 -Wl,-hugetlbfss-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
              -prof-use(pass 2) -opt-prefetch -static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:10:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2013.