



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®\_rate2006 = 341**

**Huawei E9000 CH121 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 334**

**CPU2006 license:** 3175


**Test date:** Aug-2013

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2013

**Tested by:** Huawei

**Software Availability:** Feb-2013

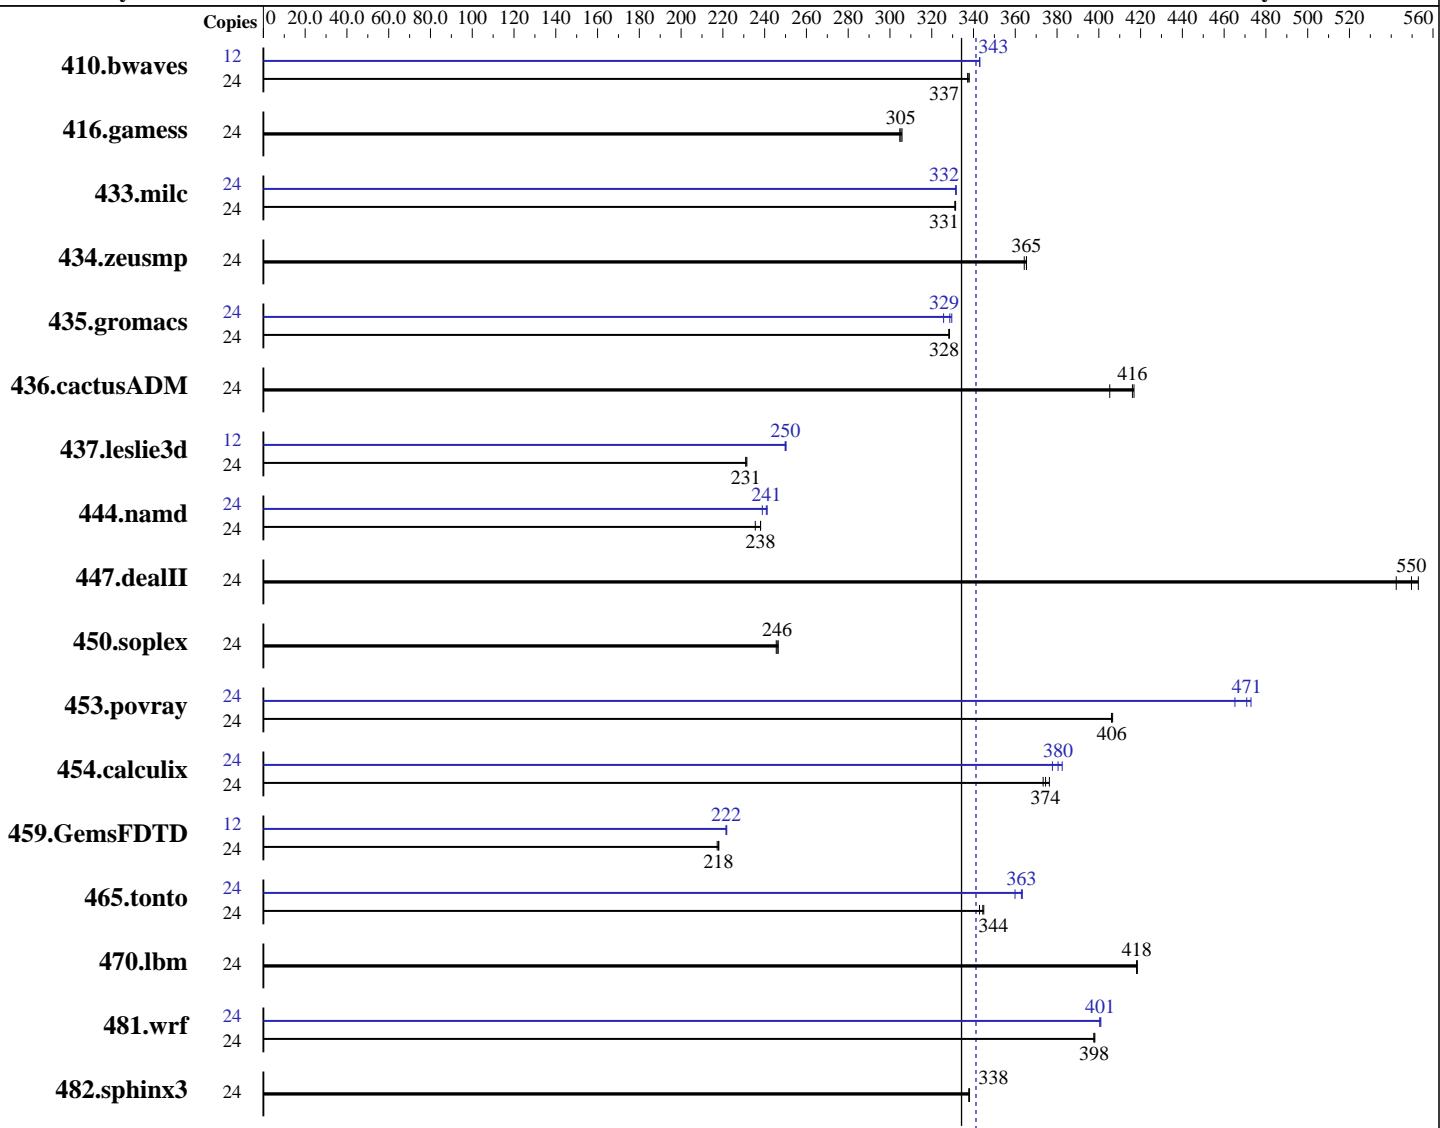

**SPECfp\_rate\_base2006 = 334**

**SPECfp\_rate2006 = 341**

## Hardware

CPU Name: Intel Xeon E5-2620  
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp\_rate2006 = 341**

**Huawei E9000 CH121 (Intel Xeon E5-2620)**

**SPECfp\_rate\_base2006 = 334**

**CPU2006 license:** 3175

**Test date:** Aug-2013

**Test sponsor:** Huawei

**Hardware Availability:** Aug-2013

**Tested by:** Huawei

**Software Availability:** Feb-2013

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-10600R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>967</b>	<b>337</b>	967	337	965	338	12	<b>475</b>	<b>343</b>	476	343	<b>476</b>	<b>343</b>
416.gamess	24	1542	305	<b>1539</b>	<b>305</b>	1537	306	24	1542	305	<b>1539</b>	<b>305</b>	1537	306
433.milc	24	665	331	<b>665</b>	<b>331</b>	665	331	24	<b>665</b>	<b>332</b>	664	332	<b>665</b>	<b>332</b>
434.zeusmp	24	<b>598</b>	<b>365</b>	598	365	600	364	24	<b>598</b>	<b>365</b>	598	365	600	364
435.gromacs	24	<b>522</b>	<b>328</b>	522	328	522	329	24	<b>521</b>	<b>329</b>	526	326	520	330
436.cactusADM	24	708	405	<b>689</b>	<b>416</b>	688	417	24	708	405	<b>689</b>	<b>416</b>	688	417
437.leslie3d	24	977	231	975	231	<b>976</b>	<b>231</b>	12	<b>451</b>	<b>250</b>	451	250	452	250
444.namd	24	<b>809</b>	<b>238</b>	809	238	817	236	24	798	241	806	239	<b>799</b>	<b>241</b>
447.dealII	24	497	553	506	542	<b>499</b>	<b>550</b>	24	497	553	506	542	<b>499</b>	<b>550</b>
450.soplex	24	815	246	812	247	<b>814</b>	<b>246</b>	24	815	246	812	247	<b>814</b>	<b>246</b>
453.povray	24	<b>314</b>	<b>406</b>	314	406	314	407	24	274	465	270	473	<b>271</b>	<b>471</b>
454.calculix	24	526	376	530	373	<b>529</b>	<b>374</b>	24	524	378	518	382	<b>520</b>	<b>380</b>
459.GemsFDTD	24	<b>1169</b>	<b>218</b>	1172	217	1168	218	12	<b>575</b>	<b>222</b>	575	222	574	222
465.tonto	24	685	345	689	343	<b>686</b>	<b>344</b>	24	656	360	650	363	<b>651</b>	<b>363</b>
470.lbm	24	789	418	<b>789</b>	<b>418</b>	788	418	24	789	418	<b>789</b>	<b>418</b>	788	418
481.wrf	24	<b>674</b>	<b>398</b>	673	398	674	398	24	669	401	<b>669</b>	<b>401</b>	669	400
482.sphinx3	24	1383	338	<b>1385</b>	<b>338</b>	1385	338	24	1383	338	<b>1385</b>	<b>338</b>	1385	338

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Set Power Efficiency Mode to Performance (Default = custom)

Sysinfo program /spec/config/sysinfo.rev6800

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2620)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 341**

**SPECfp\_rate\_base2006 = 334**

**Test date:** Aug-2013

**Hardware Availability:** Aug-2013

**Software Availability:** Feb-2013

## Platform Notes (Continued)

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on spec Thu Aug 8 20:11:54 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132117844 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux spec 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 8 05:48
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  241G   29G  200G  13%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2620)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 341**

**SPECfp\_rate\_base2006 = 334**

**Test date:** Aug-2013

**Hardware Availability:** Aug-2013

**Software Availability:** Feb-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2620)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 341**

**SPECfp\_rate\_base2006 = 334**

**Test date:** Aug-2013

**Hardware Availability:** Aug-2013

**Software Availability:** Feb-2013

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2620)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECfp\_rate2006 = 341**

**SPECfp\_rate\_base2006 = 334**

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Peak Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2620)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp\_rate2006 = 341

SPECfp\_rate\_base2006 = 334

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3
```

```
481.wrf: Same as 454.calculix
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:58:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 October 2013.