



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 467

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate_base2006 = 458

CPU2006 license: 55


Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

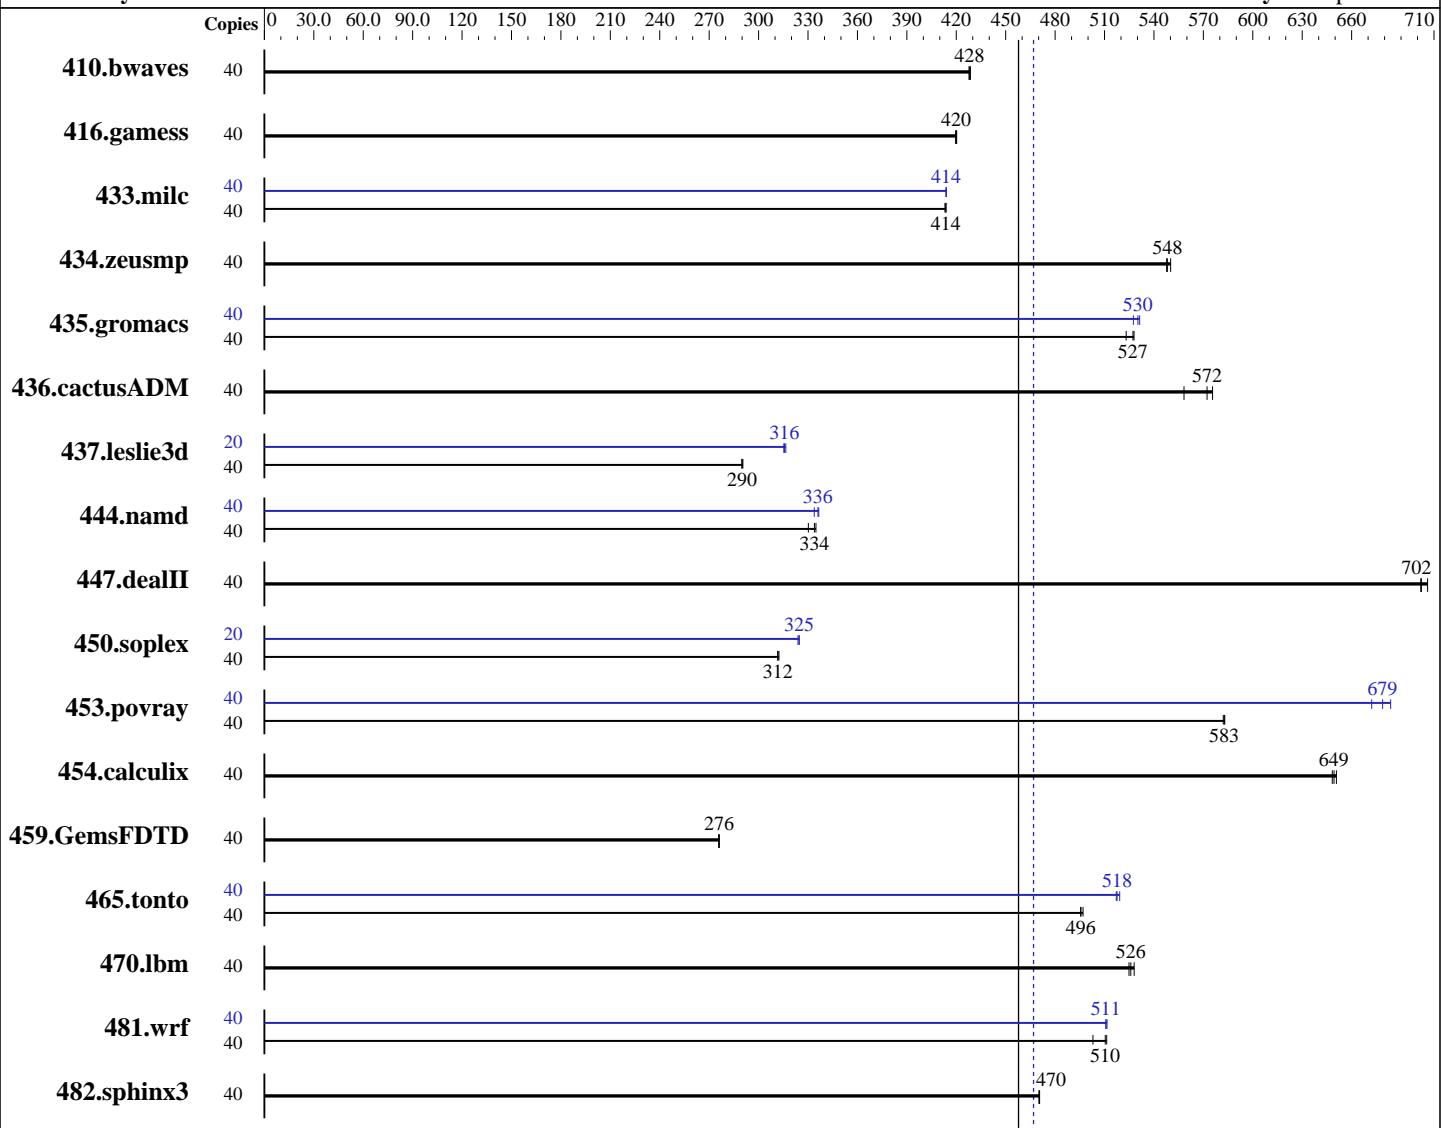

SPECfp_rate_base2006 = 458

SPECfp_rate2006 = 467

Hardware

CPU Name: Intel Xeon E5-2650L v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz: 1700
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64)
3.0.76-0.11-default
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE
for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran
Studio XE for Linux
Auto Parallel: No
File System: ext2
System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 467

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate_base2006 = 458

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem:	1 x 300 GB 15000 RPM SAS
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	<u>1270</u>	428	1268	429	1271	428	40	<u>1270</u>	428	1268	429	1271	428		
416.gamess	40	<u>1865</u>	420	1864	420	1867	420	40	<u>1865</u>	420	1864	420	1867	420		
433.milc	40	889	413	<u>888</u>	414	887	414	40	<u>887</u>	414	887	414	887	414		
434.zeusmp	40	<u>664</u>	548	662	550	665	548	40	<u>664</u>	548	662	550	665	548		
435.gromacs	40	<u>542</u>	527	541	528	546	523	40	<u>538</u>	531	541	528	<u>539</u>	530		
436.cactusADM	40	<u>835</u>	572	856	558	830	576	40	<u>835</u>	572	856	558	830	576		
437.leslie3d	40	1294	290	<u>1297</u>	290	1297	290	20	596	315	<u>595</u>	316	594	317		
444.namd	40	971	330	958	335	<u>961</u>	334	40	961	334	953	337	<u>955</u>	336		
447.dealII	40	648	706	652	702	<u>652</u>	702	40	648	706	652	702	<u>652</u>	702		
450.soplex	40	1068	312	1070	312	<u>1070</u>	312	20	<u>514</u>	325	515	324	514	325		
453.povray	40	<u>365</u>	583	365	583	366	582	40	317	672	311	684	<u>313</u>	679		
454.calculix	40	507	651	<u>508</u>	649	509	648	40	507	651	<u>508</u>	649	509	648		
459.GemsFDTD	40	<u>1538</u>	276	1539	276	1537	276	40	<u>1538</u>	276	1539	276	1537	276		
465.tonto	40	<u>794</u>	496	792	497	794	495	40	<u>760</u>	518	761	517	758	519		
470.lbm	40	1041	528	<u>1045</u>	526	1047	525	40	1041	528	<u>1045</u>	526	1047	525		
481.wrf	40	<u>875</u>	510	874	511	888	503	40	<u>875</u>	511	873	512	<u>875</u>	511		
482.sphinx3	40	1657	471	<u>1657</u>	470	1658	470	40	<u>1657</u>	471	<u>1657</u>	470	1658	470		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 467

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate_base2006 = 458

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Platform Notes

```
BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled  
Logical Processor enabled  
System Profile set to Performance  
Sysinfo program /root/cpu2006.1.2.ic13/config/sysinfo.rev6818  
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191  
running on linux Tue Sep 3 02:54:49 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz  
      2 "physical id"s (chips)  
      40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
      cpu cores : 10  
      siblings : 20  
      physical 0: cores 0 1 2 3 4 8 9 10 11 12  
      physical 1: cores 0 1 2 3 4 8 9 10 11 12  
cache size : 25600 KB
```

```
From /proc/meminfo  
MemTotal:       264634596 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*  
SuSE-release:  
  SUSE Linux Enterprise Server 11 (x86_64)  
  VERSION = 11  
  PATCHLEVEL = 3
```

```
uname -a:  
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 2 09:28 last=S
```

```
SPEC is set to: /root/cpu2006.1.2.ic13  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        ext2  267G   45G  221G  17% /
```

Additional information from dmidecode:

BIOS Dell Inc. 2.0.19 08/29/2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 467

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate_base2006 = 458

CPU2006 license: 55

Test date: Sep-2013

Test sponsor: Dell Inc.

Hardware Availability: Sep-2013

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

Memory:

6x 00AD00B300AD HMT42GR7MFR4C-RD 16 GB 1600 MHz
10x 00AD04B300AD HMT42GR7AFR4C-RD 16 GB 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006.1.2.ic13/libs/32:/root/cpu2006.1.2.ic13/libs/64:/root/cpu2006.1.2.ic13/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 467

SPECfp_rate_base2006 = 458

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 467

SPECfp_rate_base2006 = 458

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -static -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 467

PowerEdge R620 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate_base2006 = 458

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

```
410.bwaves: basepeak = yes  
416.gamess: basepeak = yes  
434.zeusmp: basepeak = yes  
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch  
459.GemsFDTD: basepeak = yes  
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
           -inline-calloc -opt-malloc-options=3  
  
Benchmarks using both Fortran and C:  
  
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
             -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
             -prof-use(pass 2) -opt-prefetch -static -auto-ilp32  
436.cactusADM: basepeak = yes  
454.calculix: basepeak = yes  
481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:50:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 October 2013.