



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T110f-E (Intel Core i3-4330)

**SPECfp®\_rate2006 = 100**

**SPECfp\_rate\_base2006 = 97.2**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

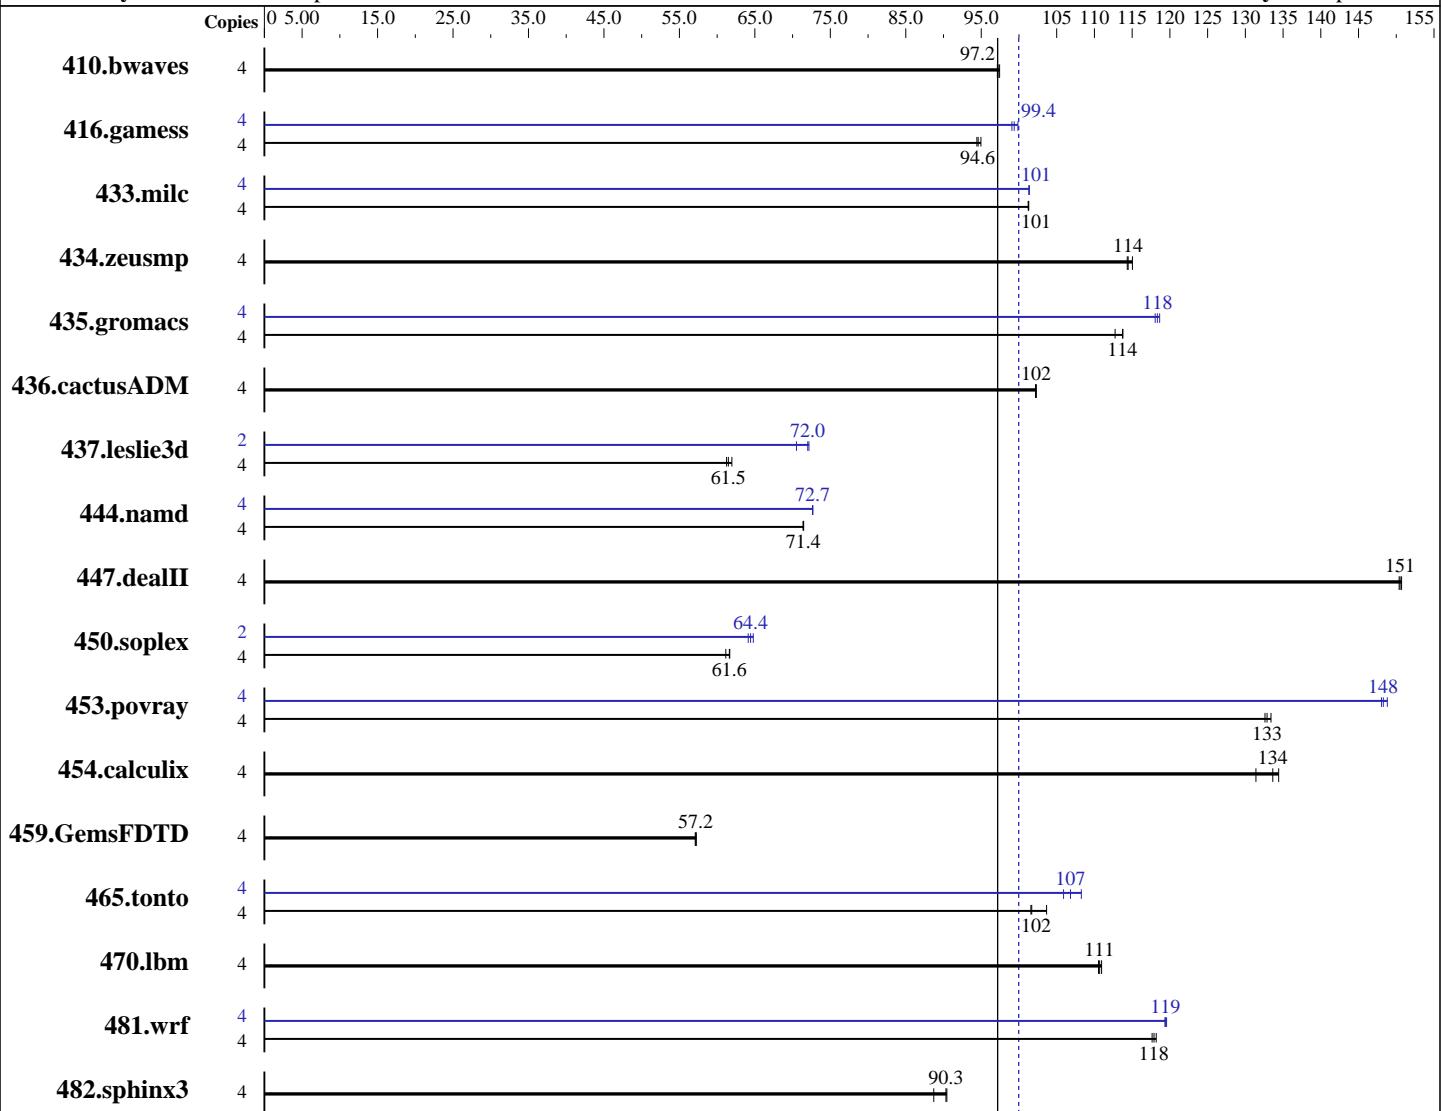

**SPECfp\_rate\_base2006 = 97.2**

**SPECfp\_rate2006 = 100**

## Hardware

CPU Name: Intel Core i3-4330  
 CPU Characteristics:  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: Kernel 2.6.32-358.el6.x86\_64  
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 100**

Express5800/T110f-E (Intel Core i3-4330)

**SPECfp\_rate\_base2006 = 97.2**

**CPU2006 license:** 9006

**Test date:** Nov-2013

**Test sponsor:** NEC Corporation

**Hardware Availability:** Oct-2013

**Tested by:** NEC Corporation

**Software Availability:** Sep-2013

L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	558	97.4	560	97.1	<b>559</b>	<b>97.2</b>	4	558	97.4	560	97.1	<b>559</b>	<b>97.2</b>
416.gamess	4	829	94.4	<b>828</b>	<b>94.6</b>	825	95.0	4	791	99.1	784	99.9	<b>788</b>	<b>99.4</b>
433.milc	4	<b>363</b>	<b>101</b>	363	101	363	101	4	<b>362</b>	101	362	101	<b>362</b>	<b>101</b>
434.zeusmp	4	316	115	318	114	<b>318</b>	<b>114</b>	4	316	115	318	114	<b>318</b>	<b>114</b>
435.gromacs	4	<b>251</b>	<b>114</b>	251	114	253	113	4	241	119	242	118	<b>241</b>	<b>118</b>
436.cactusADM	4	468	102	<b>468</b>	<b>102</b>	467	102	4	468	102	<b>468</b>	<b>102</b>	467	102
437.leslie3d	4	607	62.0	614	61.2	<b>611</b>	<b>61.5</b>	2	<b>261</b>	<b>72.0</b>	267	70.5	261	72.2
444.namd	4	<b>449</b>	<b>71.4</b>	449	71.5	449	71.4	4	<b>442</b>	<b>72.7</b>	441	72.7	442	72.6
447.dealII	4	304	151	<b>304</b>	<b>151</b>	304	150	4	304	151	<b>304</b>	<b>151</b>	304	150
450.soplex	4	<b>541</b>	<b>61.6</b>	541	61.7	546	61.1	2	<b>259</b>	<b>64.4</b>	260	64.1	257	64.8
453.povray	4	160	133	160	133	<b>160</b>	<b>133</b>	4	143	149	<b>144</b>	<b>148</b>	144	148
454.calculix	4	251	131	<b>247</b>	<b>134</b>	246	134	4	251	131	<b>247</b>	<b>134</b>	246	134
459.GemsFDTD	4	743	57.1	741	57.2	<b>742</b>	<b>57.2</b>	4	743	57.1	741	57.2	<b>742</b>	<b>57.2</b>
465.tonto	4	387	102	<b>387</b>	<b>102</b>	380	104	4	372	106	<b>368</b>	<b>107</b>	364	108
470.lbm	4	495	111	<b>497</b>	<b>111</b>	497	111	4	495	111	<b>497</b>	<b>111</b>	497	111
481.wrf	4	<b>379</b>	<b>118</b>	378	118	380	118	4	374	120	374	119	<b>374</b>	<b>119</b>
482.sphinx3	4	879	88.7	862	90.4	<b>863</b>	<b>90.3</b>	4	879	88.7	862	90.4	<b>863</b>	<b>90.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110f-E (Intel Core i3-4330)

**SPECfp\_rate2006 = 100**

CPU2006 license: 9006

**Test date:** Nov-2013

Test sponsor: NEC Corporation

**Hardware Availability:** Oct-2013

Tested by: NEC Corporation

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Added glibc-static-2.12-1.107.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110f-E (Intel Core i3-4330)

**SPECfp\_rate2006 = 100**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2013

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110f-E (Intel Core i3-4330)

**SPECfp\_rate2006 = 100**

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Oct-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -static  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110f-E (Intel Core i3-4330)

**SPECfp\_rate2006 = 100**

CPU2006 license: 9006

Test date: Nov-2013

Test sponsor: NEC Corporation

Hardware Availability: Oct-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:05:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 December 2013.