



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp®\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

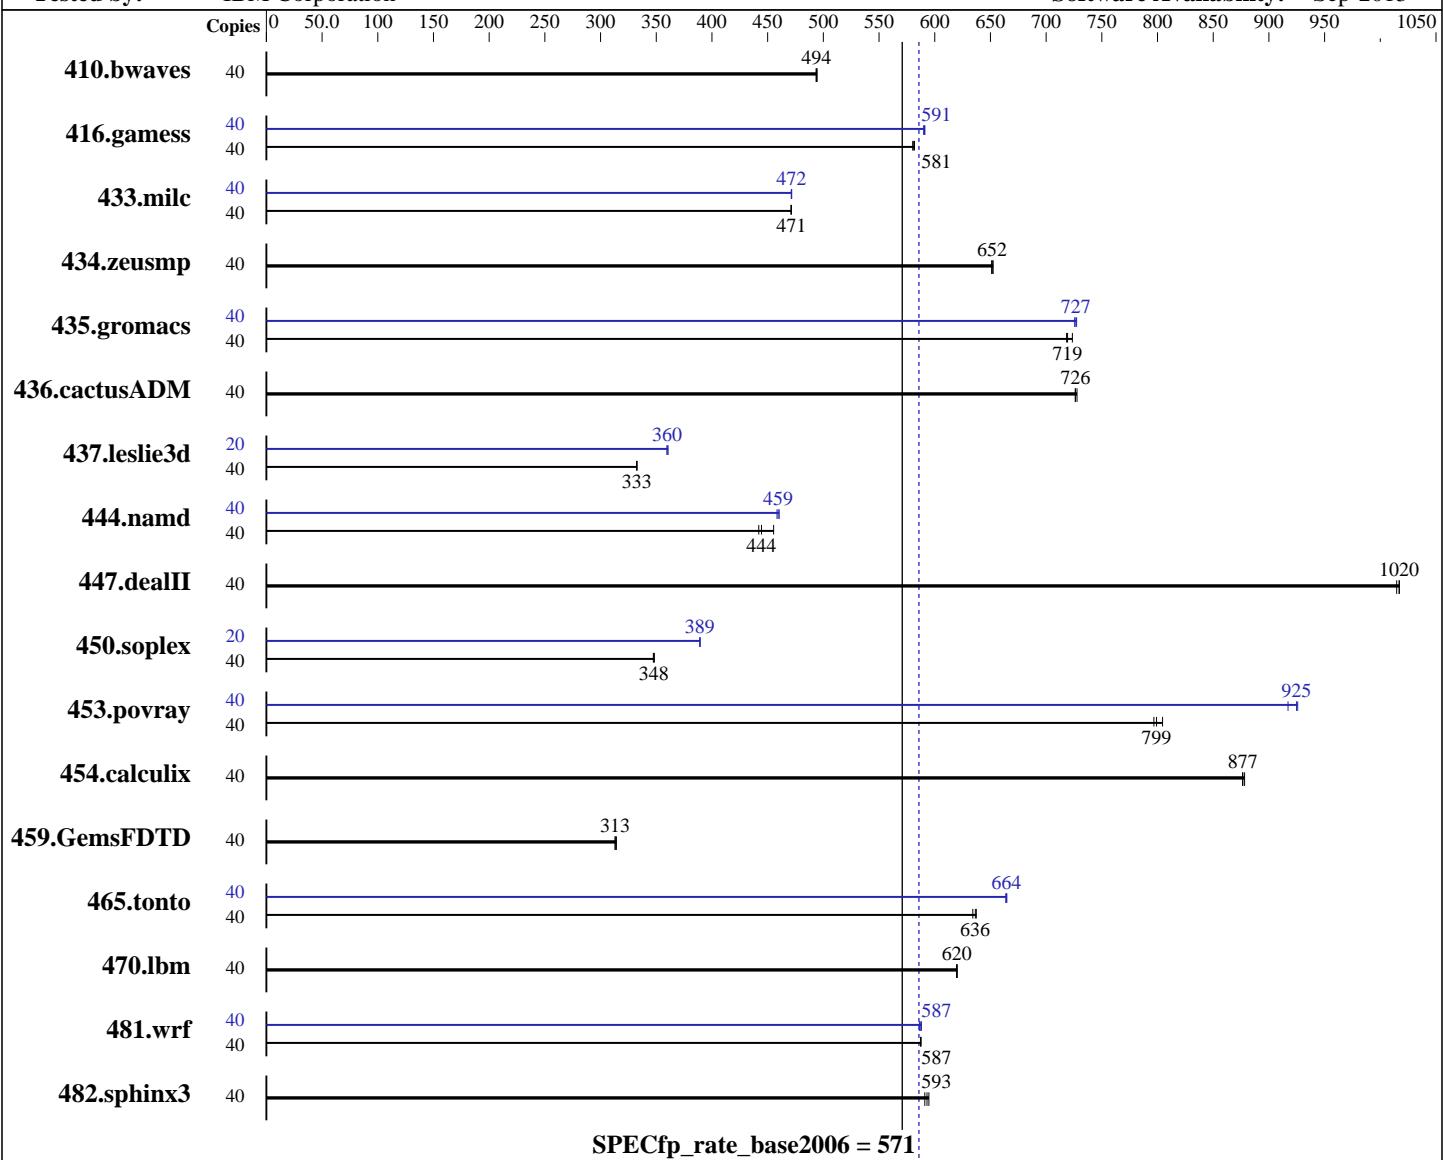

**SPECfp\_rate\_base2006 = 571**

**SPECfp\_rate2006 = 586**

### Hardware

CPU Name: Intel Xeon E5-2660 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Nov-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1099	494	1101	494	<b>1101</b>	<b>494</b>	40	1099	494	1101	494	<b>1101</b>	<b>494</b>
416.gamess	40	1350	580	1346	582	<b>1349</b>	<b>581</b>	40	1325	591	1327	590	<b>1326</b>	<b>591</b>
433.milc	40	780	471	<b>779</b>	<b>471</b>	779	471	40	779	472	<b>779</b>	<b>472</b>	779	471
434.zeusmp	40	559	651	<b>559</b>	<b>652</b>	558	652	40	559	651	<b>559</b>	<b>652</b>	558	652
435.gromacs	40	<b>397</b>	<b>719</b>	395	724	398	718	40	393	727	<b>393</b>	<b>727</b>	394	726
436.cactusADM	40	<b>658</b>	<b>726</b>	657	728	658	726	40	<b>658</b>	<b>726</b>	657	728	<b>658</b>	726
437.leslie3d	40	1130	333	<b>1131</b>	<b>333</b>	1131	333	20	<b>523</b>	<b>360</b>	523	360	521	361
444.namd	40	726	442	<b>722</b>	<b>444</b>	704	455	40	700	458	<b>698</b>	<b>459</b>	697	460
447.dealII	40	<b>450</b>	<b>1020</b>	451	1010	450	1020	40	<b>450</b>	<b>1020</b>	451	1010	450	1020
450.soplex	40	960	347	958	348	<b>959</b>	<b>348</b>	20	429	389	<b>429</b>	<b>389</b>	428	389
453.povray	40	267	797	265	805	<b>266</b>	<b>799</b>	40	230	926	<b>230</b>	<b>925</b>	232	917
454.calculix	40	<b>376</b>	<b>877</b>	376	878	377	876	40	<b>376</b>	<b>877</b>	376	878	377	876
459.GemsFDTD	40	<b>1355</b>	<b>313</b>	1351	314	1356	313	40	<b>1355</b>	<b>313</b>	1351	314	1356	313
465.tonto	40	<b>618</b>	<b>636</b>	618	637	621	634	40	593	664	592	665	<b>592</b>	<b>664</b>
470.lbm	40	<b>887</b>	<b>620</b>	887	620	886	620	40	<b>887</b>	<b>620</b>	887	620	886	620
481.wrf	40	761	587	760	588	<b>761</b>	<b>587</b>	40	762	586	760	588	<b>761</b>	<b>587</b>
482.sphinx3	40	1319	591	1311	595	<b>1315</b>	<b>593</b>	40	1319	591	1311	595	<b>1315</b>	<b>593</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Nov-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3650M4 Wed Nov 20 01:22:43 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 10  
siblings : 20  
physical 0: cores 0 1 2 3 4 8 9 10 11 12  
physical 1: cores 0 1 2 3 4 8 9 10 11 12  
cache size : 25600 KB

From /proc/meminfo  
MemTotal: 264339664 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux x3650M4 2.6.32-358.18.1.el6.x86\_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Nov 19 12:04

SPEC is set to: /home/SPECcpu-new  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/vg\_x3650m4-lv\_home ext4 313G 234G 63G 79% /home

Additional information from dmidecode:

BIOS IBM -[TESTBUILD-1.50]- 08/09/2013

Memory:

8x Not Specified Not Specified  
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

**CPU2006 license:** 11

**Test date:** Nov-2013

**Test sponsor:** IBM Corporation

**Hardware Availability:** Dec-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

"Not Specified" memory information from dmidecode indicates unused DIMM slots.

The BIOS IBM -[TESTBUILD-1.50] is equivalent to production version [VVE134TUS-1.51]

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECCpu-new/libs/32:/home/SPECCpu-new/libs/64:/home/SPECCpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Nov-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Nov-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2660 v2, 2.20 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 571**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Nov-2013

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:33:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 December 2013.