



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp[®]_rate2006 = 431

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = 423

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

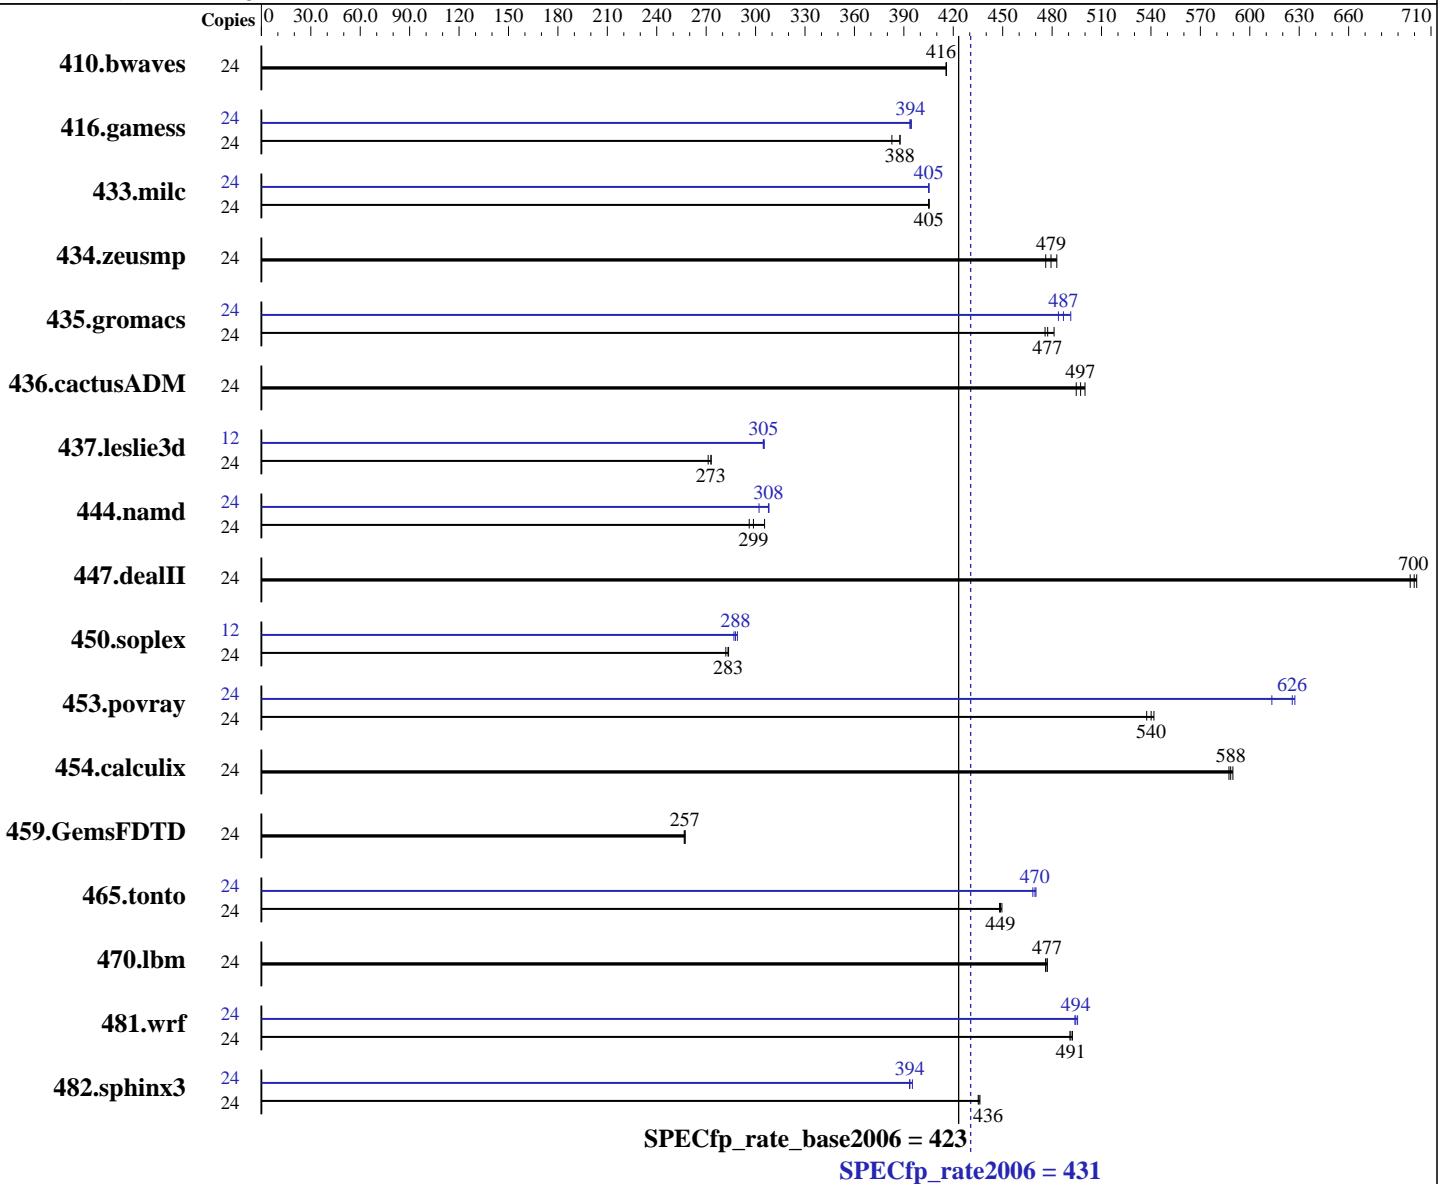

Hardware

CPU Name: Intel Xeon E5-2630 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64) 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = **431**

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = **423**

CPU2006 license: 9046

Test date: Nov-2013

Test sponsor: Sugon

Hardware Availability: Nov-2013

Tested by: Sugon

Software Availability: Nov-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 X 3.0 TB SATA 7.2K RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|------------|------------|------------|------------|-------------|------------|--------|------------|------------|-------------|------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 24 | 785 | 416 | 784 | 416 | 784 | 416 | 24 | 785 | 416 | 784 | 416 | 784 | 416 |
| 416.gamess | 24 | 1212 | 388 | 1228 | 383 | 1212 | 388 | 24 | 1191 | 395 | 1193 | 394 | 1194 | 394 |
| 433.milc | 24 | 544 | 405 | 544 | 405 | 543 | 405 | 24 | 544 | 405 | 544 | 405 | 544 | 405 |
| 434.zeusmp | 24 | 459 | 476 | 452 | 483 | 456 | 479 | 24 | 459 | 476 | 452 | 483 | 456 | 479 |
| 435.gromacs | 24 | 359 | 477 | 356 | 481 | 360 | 476 | 24 | 349 | 491 | 352 | 487 | 354 | 484 |
| 436.cactusADM | 24 | 574 | 500 | 577 | 497 | 580 | 495 | 24 | 574 | 500 | 577 | 497 | 580 | 495 |
| 437.leslie3d | 24 | 827 | 273 | 826 | 273 | 832 | 271 | 12 | 369 | 305 | 370 | 305 | 370 | 305 |
| 444.namd | 24 | 644 | 299 | 650 | 296 | 630 | 305 | 24 | 625 | 308 | 625 | 308 | 637 | 302 |
| 447.dealII | 24 | 391 | 701 | 392 | 700 | 394 | 697 | 24 | 391 | 701 | 392 | 700 | 394 | 697 |
| 450.soplex | 24 | 706 | 284 | 707 | 283 | 710 | 282 | 12 | 346 | 289 | 349 | 287 | 348 | 288 |
| 453.povray | 24 | 236 | 542 | 238 | 537 | 236 | 540 | 24 | 208 | 613 | 204 | 627 | 204 | 626 |
| 454.calculix | 24 | 336 | 590 | 337 | 587 | 337 | 588 | 24 | 336 | 590 | 337 | 587 | 337 | 588 |
| 459.GemsFDTD | 24 | 991 | 257 | 990 | 257 | 992 | 257 | 24 | 991 | 257 | 990 | 257 | 992 | 257 |
| 465.tonto | 24 | 527 | 448 | 526 | 449 | 525 | 450 | 24 | 504 | 468 | 502 | 470 | 503 | 470 |
| 470.lbm | 24 | 693 | 476 | 691 | 477 | 691 | 477 | 24 | 693 | 476 | 691 | 477 | 691 | 477 |
| 481.wrf | 24 | 546 | 491 | 546 | 491 | 544 | 492 | 24 | 541 | 495 | 542 | 494 | 543 | 494 |
| 482.sphinx3 | 24 | 1075 | 435 | 1072 | 436 | 1074 | 436 | 24 | 1184 | 395 | 1188 | 394 | 1189 | 394 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Intel Virtualization technology set to disabled
Power Technology set to performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 431

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = 423

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

Platform Notes (Continued)

Turbo boost set to enabled
 DDR Speed set to force 1600
 Sysinfo program /root/cpu2006/config/sysinfo.rev6874
 \$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ 654bd3fcf53b06faef0efe54ed011998
 running on linux-e494 Wed Nov 27 05:15:46 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 6
  siblings     : 12
  physical 0:  cores 0 1 2 3 4 5
  physical 1:  cores 0 1 2 3 4 5
cache size     : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264522468 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 3
```

```
uname -a:
Linux linux-e494 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 26 17:44 last=S

```
SPEC is set to: /root/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext3  2.7T  527G  2.2T  20% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. V8.100A 10/31/2013

Memory:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 431

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = 423

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

Platform Notes (Continued)

16x Samsung M393B2G70QH0-YK0 16 GB 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 431

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = 423

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
 -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
 -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
 -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 431

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = 423

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 431

I620-G15 (Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp_rate_base2006 = 423

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2013

Hardware Availability: Nov-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:51:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 December 2013.