



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3


Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

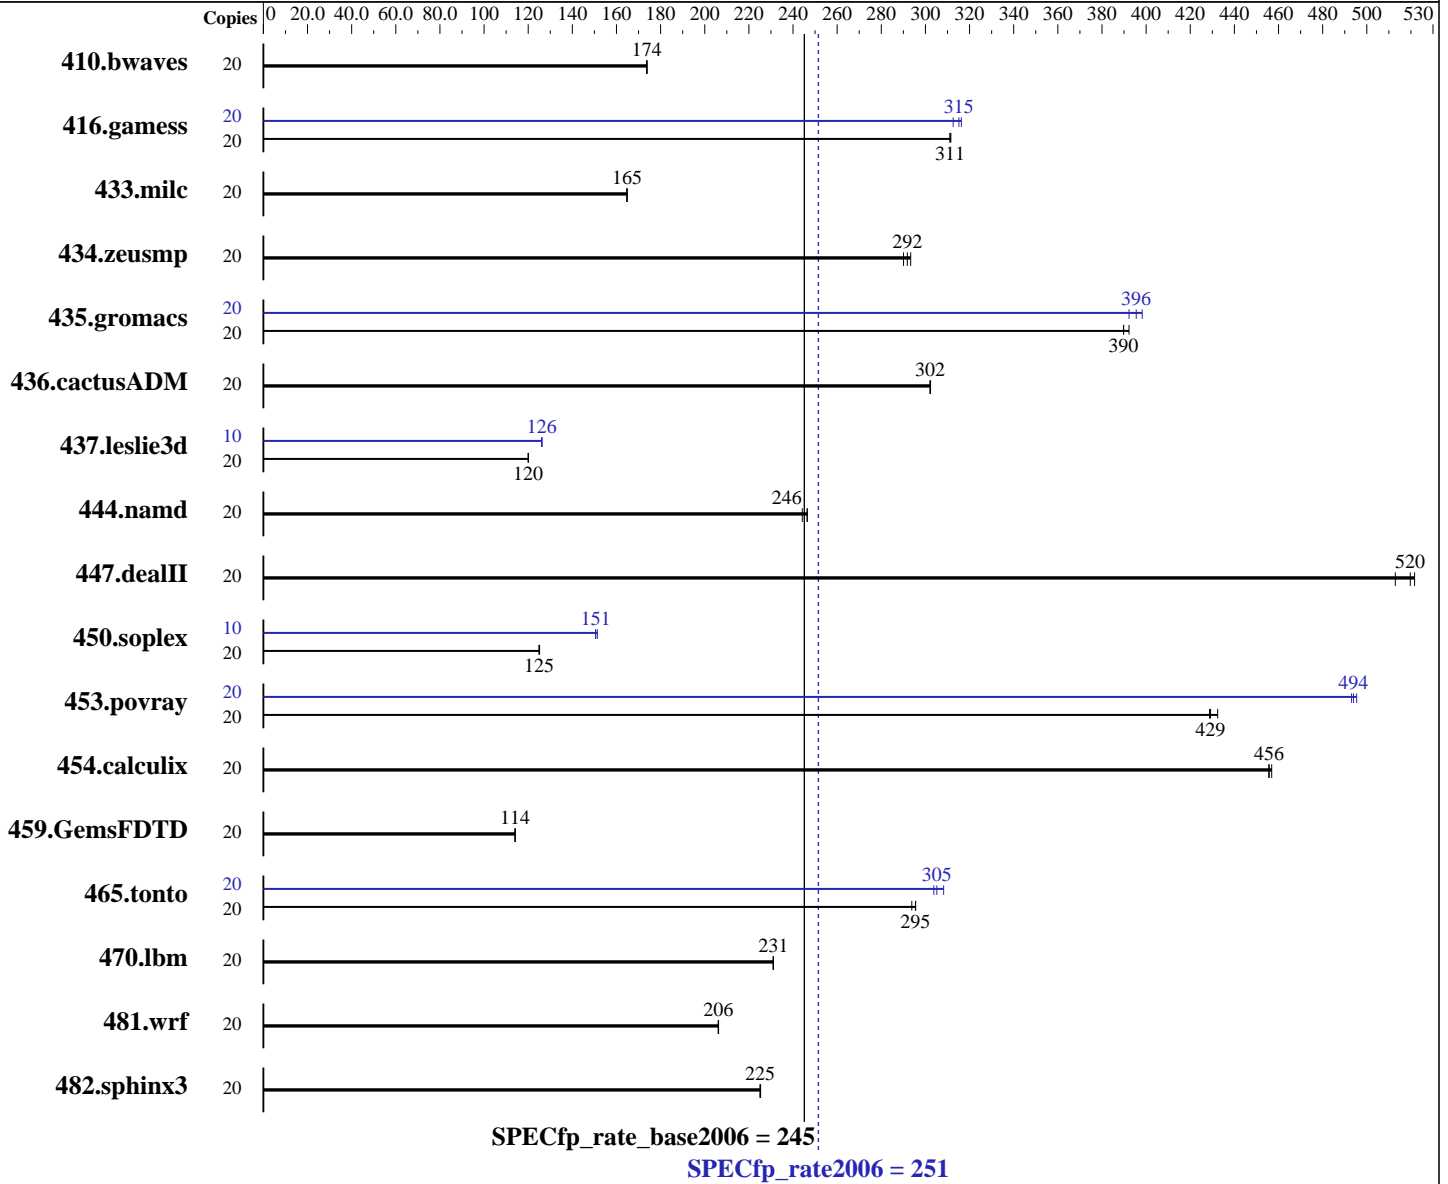

Hardware

CPU Name: Intel Xeon E5-2470 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 10 cores, 1 chip, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 1 TB 7.2 K SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	20	1563	174	1565	174	1565	174	20	1563	174	1565	174	1565	174
416.gamess	20	1259	311	1259	311	1257	312	20	1242	315	1253	313	1238	316
433.milc	20	1115	165	1114	165	1114	165	20	1115	165	1114	165	1114	165
434.zeusmp	20	627	290	624	292	620	293	20	627	290	624	292	620	293
435.gromacs	20	366	390	366	390	364	392	20	359	398	364	392	361	396
436.cactusADM	20	791	302	791	302	791	302	20	791	302	791	302	791	302
437.leslie3d	20	1565	120	1566	120	1567	120	10	745	126	745	126	745	126
444.namd	20	651	246	657	244	651	246	20	651	246	657	244	651	246
447.dealII	20	439	522	440	520	446	513	20	439	522	440	520	446	513
450.soplex	20	1333	125	1335	125	1335	125	10	551	151	554	151	554	151
453.povray	20	246	432	248	429	248	429	20	215	494	215	495	216	493
454.calculix	20	362	456	361	457	362	456	20	362	456	361	457	362	456
459.GemsFDTD	20	1861	114	1860	114	1860	114	20	1861	114	1860	114	1860	114
465.tonto	20	666	295	666	296	670	294	20	638	308	648	304	645	305
470.lbm	20	1189	231	1190	231	1189	231	20	1189	231	1190	231	1189	231
481.wrf	20	1083	206	1083	206	1084	206	20	1083	206	1083	206	1084	206
482.sphinx3	20	1731	225	1732	225	1730	225	20	1731	225	1732	225	1730	225

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Disabled unused Linux services through "stop_services.sh" before running.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191
running on ML350e-Gen8v2 Thu Dec 19 09:19:35 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2470 v2 @ 2.40GHz
 1 "physical id"s (chips)
 20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      49389676 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux ML350e-Gen8v2 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 18 11:56

SPEC is set to: /cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        ext4      915G  25G  845G   3% /
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Platform Notes (Continued)

Additional information from dmidecode:

BIOS HP J02 11/12/2013

Memory:

6x HP 689911-071 8 GB 1600 MHz 2 rank

6x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 48 GB and the dmidecode description should have one line reading as:

6x HP 689911-071 8 GB 1600 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 251

ProLiant ML350e Gen8 v2
(2.40 GHz, Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 245

CPU2006 license: 3

Test date: Dec-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:19:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 January 2014.