



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = 184

Express5800/T110e-M (Intel Xeon E5-2420 v2)

SPECfp_rate_base2006 = 180

CPU2006 license: 9006


Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

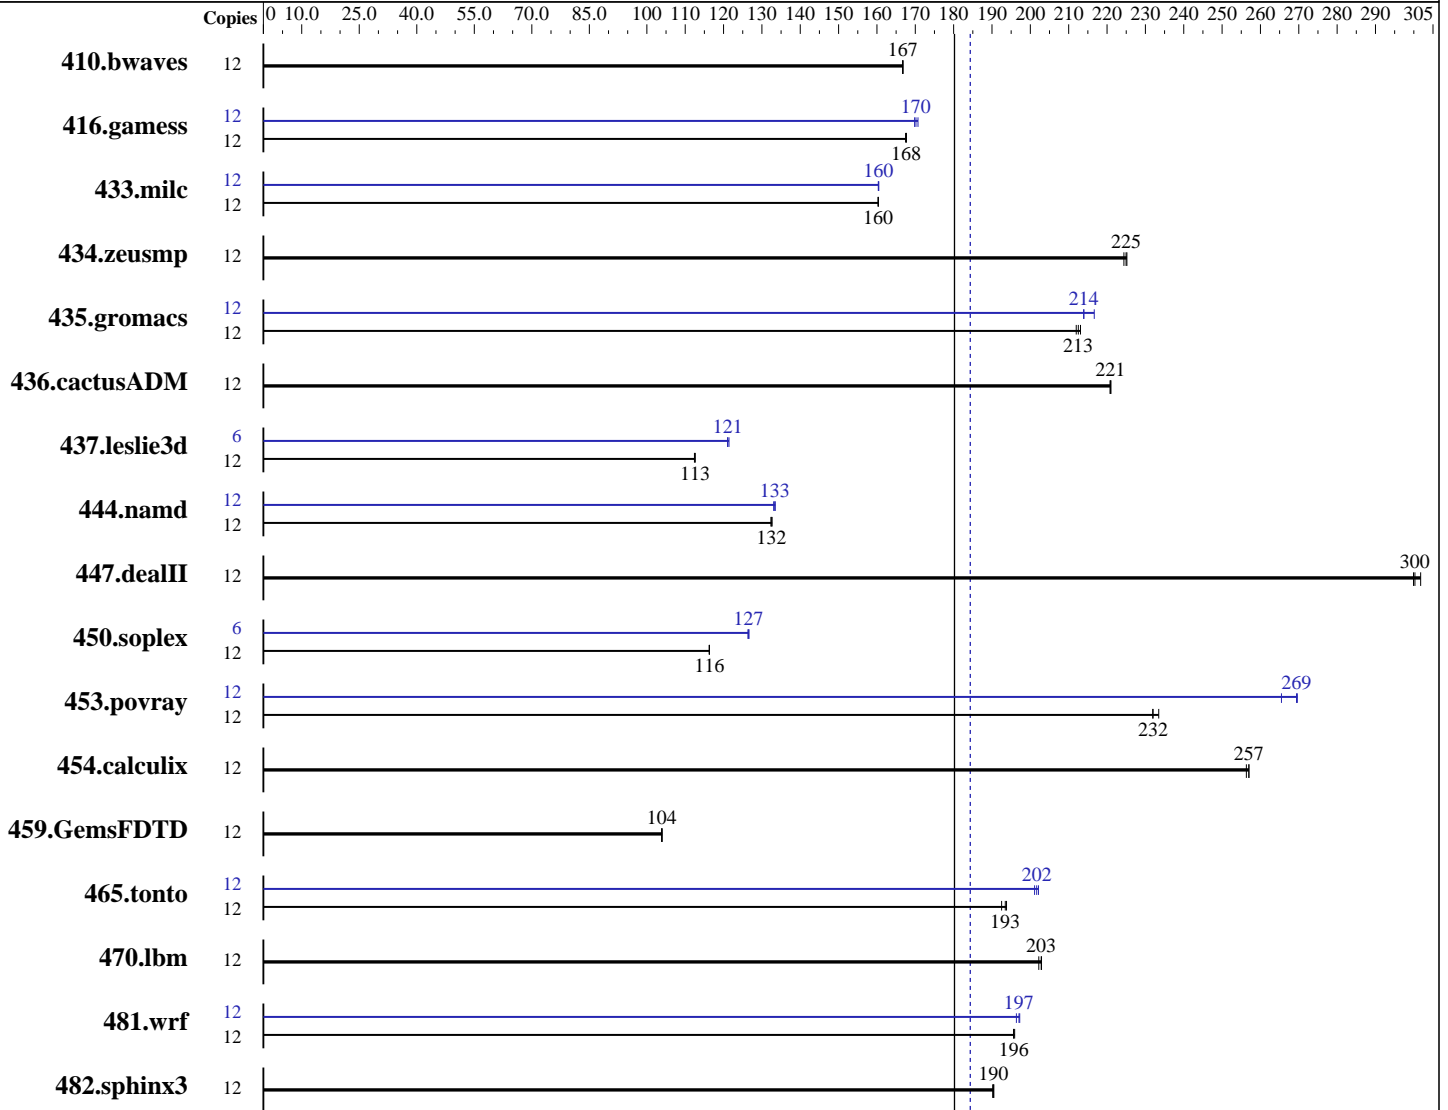

SPECfp_rate_base2006 = 180

SPECfp_rate2006 = 184

Hardware

CPU Name: Intel Xeon E5-2420 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.18.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **184**

Express5800/T110e-M (Intel Xeon E5-2420 v2)

SPECfp_rate_base2006 = **180**

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	978	167	978	167	978	167	12	978	167	978	167	978	167
416.gamess	12	1403	167	1401	168	1402	168	12	1384	170	1381	170	1376	171
433.milc	12	687	160	687	160	687	160	12	686	160	687	160	687	160
434.zeusmp	12	485	225	487	224	485	225	12	485	225	487	224	485	225
435.gromacs	12	404	212	403	213	402	213	12	400	214	395	217	401	214
436.cactusADM	12	649	221	649	221	650	221	12	649	221	649	221	650	221
437.leslie3d	12	1004	112	1002	113	1002	113	6	466	121	466	121	464	121
444.namd	12	725	133	727	132	727	132	12	723	133	721	133	722	133
447.dealII	12	458	300	455	302	457	300	12	458	300	455	302	457	300
450.soplex	12	860	116	861	116	860	116	6	396	126	395	127	396	127
453.povray	12	275	232	275	232	273	233	12	237	270	237	269	240	265
454.calculix	12	386	256	385	257	385	257	12	386	256	385	257	385	257
459.GemsFDTD	12	1226	104	1226	104	1224	104	12	1226	104	1226	104	1224	104
465.tonto	12	613	193	610	193	609	194	12	586	202	587	201	584	202
470.lbm	12	815	202	813	203	813	203	12	815	202	813	203	813	203
481.wrf	12	684	196	685	196	685	196	12	683	196	680	197	680	197
482.sphinx3	12	1228	190	1228	190	1230	190	12	1228	190	1228	190	1230	190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance
Memory Voltage: 1.5 V



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 184

Express5800/T110e-M (Intel Xeon E5-2420 v2)

SPECfp_rate_base2006 = 180

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 184

Express5800/T110e-M (Intel Xeon E5-2420 v2)

SPECfp_rate_base2006 = 180

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 184

Express5800/T110e-M (Intel Xeon E5-2420 v2)

SPECfp_rate_base2006 = 180

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 184

Express5800/T110e-M (Intel Xeon E5-2420 v2)

SPECfp_rate_base2006 = 180

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:25:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 February 2014.