



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55


Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

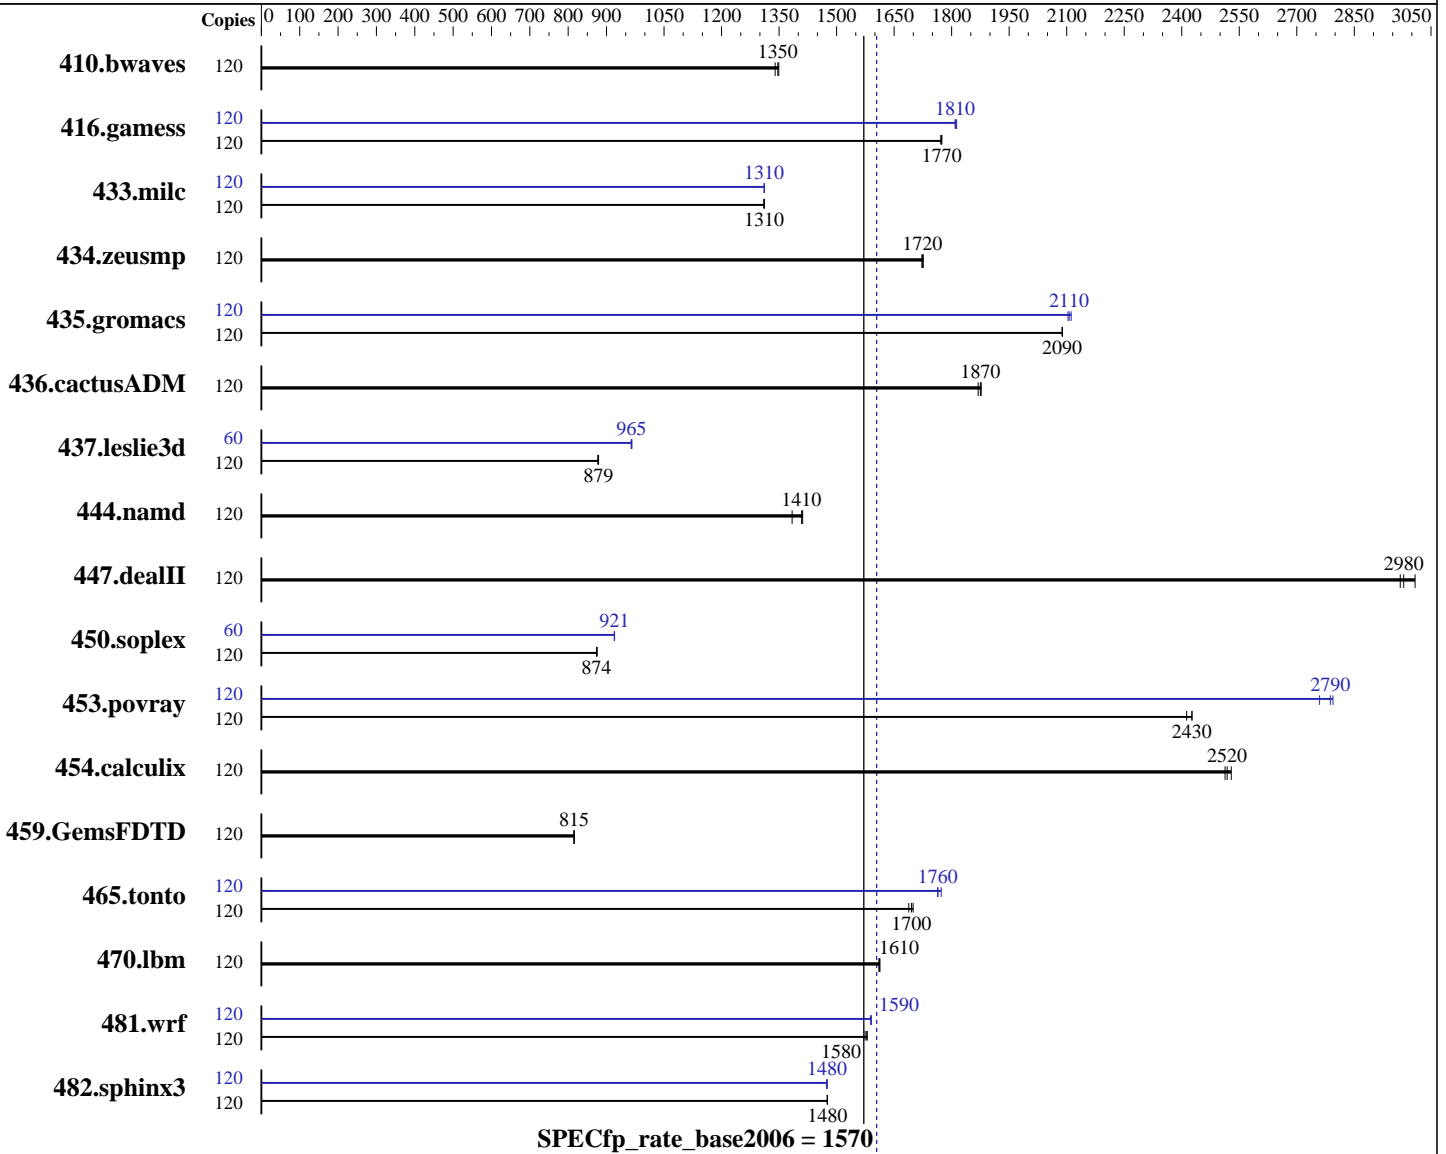

### Hardware

CPU Name: Intel Xeon E7-4870 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x 400 GB SAS6 SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	120	1217	1340	<u>1211</u>	<u>1350</u>	1209	1350	120	1217	1340	<u>1211</u>	<u>1350</u>	1209	1350
416.gamess	120	<u>1324</u>	<u>1770</u>	1324	1770	1326	1770	120	<u>1298</u>	<u>1810</u>	1296	1810	1299	1810
433.milc	120	<u>840</u>	<u>1310</u>	840	1310	841	1310	120	840	1310	<u>840</u>	<u>1310</u>	840	1310
434.zeusmp	120	633	1730	<u>634</u>	<u>1720</u>	634	1720	120	633	1730	<u>634</u>	<u>1720</u>	634	1720
435.gromacs	120	<u>410</u>	<u>2090</u>	410	2090	410	2090	120	407	2100	<u>407</u>	<u>2110</u>	406	2110
436.cactusADM	120	<u>765</u>	<u>1870</u>	767	1870	764	1880	120	<u>765</u>	<u>1870</u>	767	1870	764	1880
437.leslie3d	120	<u>1284</u>	<u>879</u>	1283	879	1286	877	60	<u>585</u>	<u>965</u>	585	965	584	966
444.namd	120	695	1380	682	1410	<u>683</u>	<u>1410</u>	120	695	1380	682	1410	<u>683</u>	<u>1410</u>
447.dealII	120	456	3010	462	2970	<u>461</u>	<u>2980</u>	120	456	3010	462	2970	<u>461</u>	<u>2980</u>
450.soplex	120	1143	876	<u>1145</u>	<u>874</u>	1145	874	60	544	920	<u>544</u>	<u>921</u>	543	921
453.povray	120	<u>263</u>	<u>2430</u>	263	2430	265	2410	120	231	2760	<u>229</u>	<u>2790</u>	228	2790
454.calculix	120	391	2530	<u>393</u>	<u>2520</u>	394	2510	120	391	2530	<u>393</u>	<u>2520</u>	394	2510
459.GemsFDTD	120	1562	815	1561	816	<u>1561</u>	<u>815</u>	120	1562	815	1561	816	<u>1561</u>	<u>815</u>
465.tonto	120	695	1700	699	1690	<u>696</u>	<u>1700</u>	120	666	1770	670	1760	<u>669</u>	<u>1760</u>
470.lbm	120	1024	1610	<u>1023</u>	<u>1610</u>	1022	1610	120	1024	1610	<u>1023</u>	<u>1610</u>	1022	1610
481.wrf	120	<u>849</u>	<u>1580</u>	848	1580	851	1570	120	844	1590	843	1590	<u>843</u>	<u>1590</u>
482.sphinx3	120	1585	1480	1584	1480	<u>1585</u>	<u>1480</u>	120	1585	1480	<u>1586</u>	<u>1480</u>	1587	1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Platform Notes (Continued)

System Profile set to Custom  
 Memory Patrol Scrub set to disabled  
 Sysinfo program  
 /root/Desktop/Performance/ic14.0\_Oct17\_2013/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on slesperf2 Sun Feb 9 00:10:25 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E7-4870 v2 @ 2.30GHz
 4 "physical id"s (chips)
 120 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 15
  siblings     : 30
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size     : 30720 KB
```

```
From /proc/meminfo
MemTotal:      1058789108 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux slesperf2 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 9 00:07 last=S

```
SPEC is set to: /root/Desktop/Performance/ic14.0_Oct17_2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  365G  190G  174G  53% /
```

Additional information from dmidecode:  
 BIOS Dell Inc. 1.0.4 01/27/2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Platform Notes (Continued)

Memory:

47x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1333 MHz  
11x 00CE04B300CE M393B2G70BH0-YK0 16 GB 1333 MHz  
6x 00CE04B300CE M393B2G70CB0-YK0 16 GB 1333 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = \*/root/Desktop/Performance/icl4.0\_Oct17\_2013/libs/32:/root/Desktop/Performance/icl4.0\_Oct17\_2013/libs/64:/root/Desktop/Performance/icl4.0\_Oct17\_2013/sh\*

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1600

PowerEdge R920 (Intel Xeon E7-4870 v2, 2.30 GHz)

SPECfp\_rate\_base2006 = 1570

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:38:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 March 2014.