



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp<sup>®</sup>\_rate2006 = 539

Compute Blade 520H (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 529

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

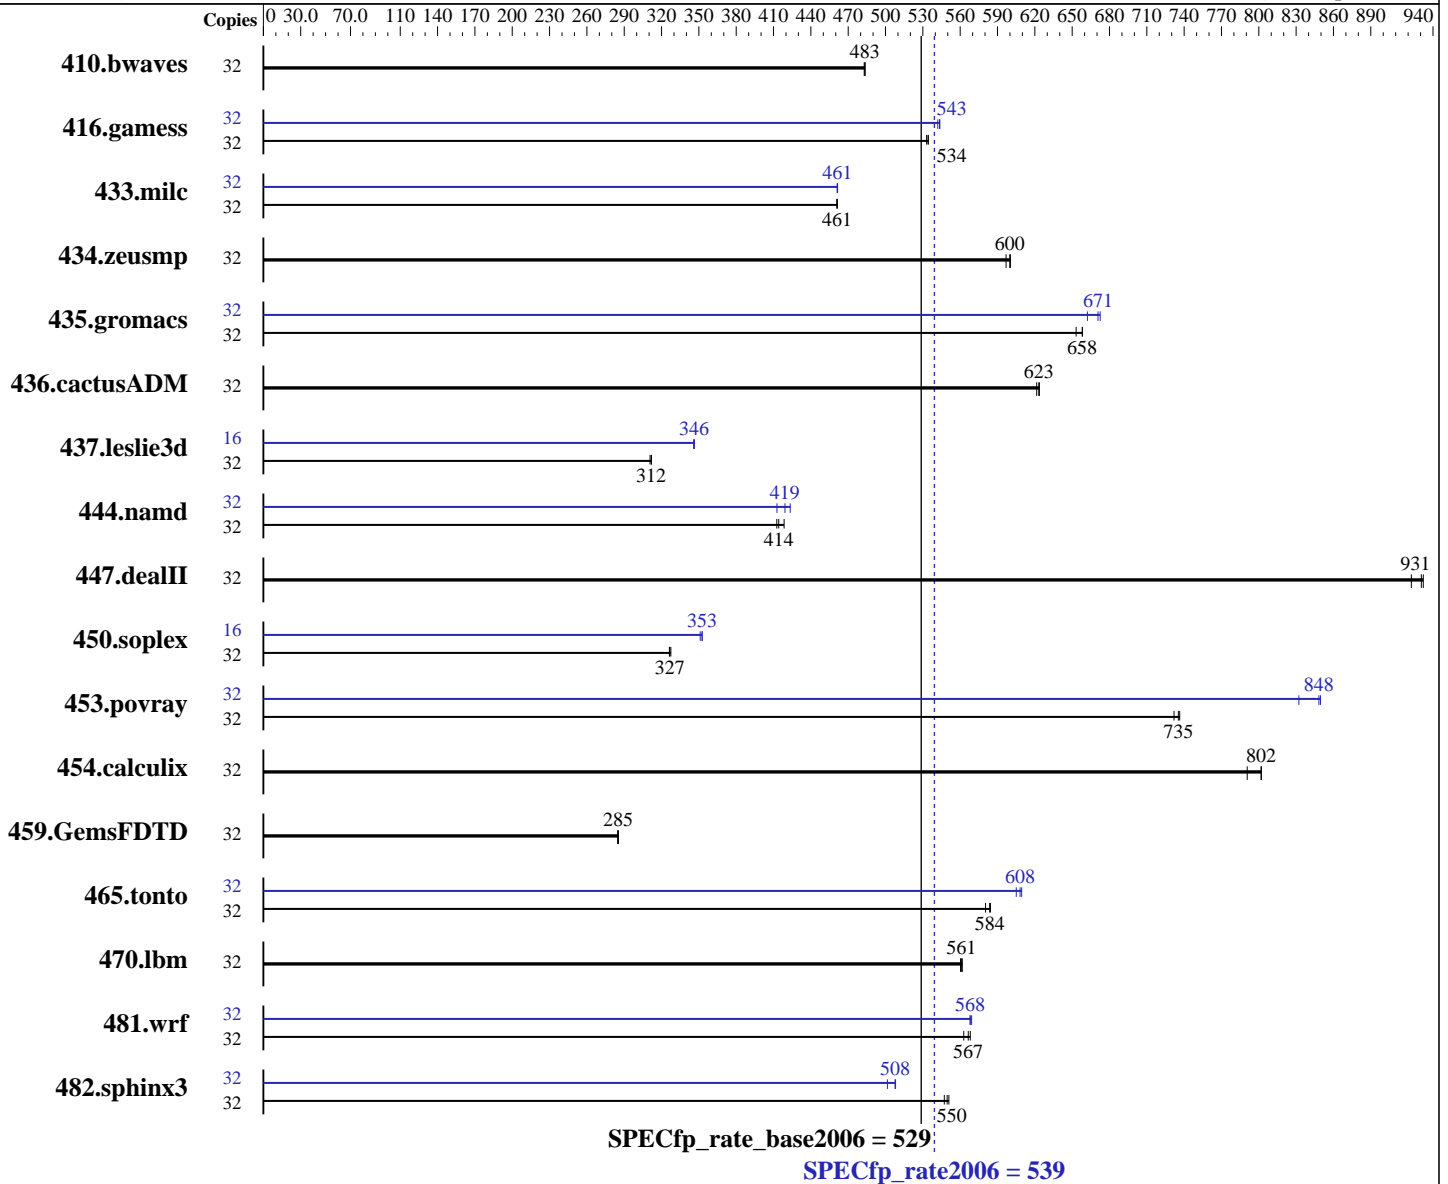

### Hardware

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = **539**

Compute Blade 520H (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = **529**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: none

Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	901	483	899	484	<b>900</b>	<b>483</b>	32	901	483	899	484	<b>900</b>	<b>483</b>
416.gamess	32	1173	534	<b>1173</b>	<b>534</b>	1175	533	32	1153	544	<b>1153</b>	<b>543</b>	1156	542
433.milc	32	<b>637</b>	<b>461</b>	637	461	637	461	32	637	461	<b>637</b>	<b>461</b>	637	461
434.zeusmp	32	488	597	<b>485</b>	<b>600</b>	485	600	32	488	597	<b>485</b>	<b>600</b>	485	600
435.gromacs	32	347	658	<b>347</b>	<b>658</b>	350	653	32	345	662	<b>341</b>	<b>671</b>	340	673
436.cactusADM	32	613	624	<b>614</b>	<b>623</b>	615	621	32	613	624	<b>614</b>	<b>623</b>	615	621
437.leslie3d	32	<b>965</b>	<b>312</b>	968	311	964	312	16	<b>434</b>	<b>346</b>	434	346	435	346
444.namd	32	622	413	613	418	<b>620</b>	<b>414</b>	32	606	423	622	413	<b>612</b>	<b>419</b>
447.dealII	32	397	923	<b>393</b>	<b>931</b>	393	932	32	397	923	<b>393</b>	<b>931</b>	393	932
450.soplex	32	815	327	818	326	<b>817</b>	<b>327</b>	16	<b>378</b>	<b>353</b>	380	351	378	353
453.povray	32	231	736	<b>232</b>	<b>735</b>	233	732	32	200	850	<b>201</b>	<b>848</b>	205	832
454.calculix	32	329	802	334	791	<b>329</b>	<b>802</b>	32	329	802	334	791	<b>329</b>	<b>802</b>
459.GemsFDTD	32	<b>1191</b>	<b>285</b>	1190	285	1192	285	32	<b>1191</b>	<b>285</b>	1190	285	1192	285
465.tonto	32	543	580	539	584	<b>539</b>	<b>584</b>	32	517	609	<b>518</b>	<b>608</b>	520	605
470.lbm	32	785	560	<b>784</b>	<b>561</b>	783	562	32	785	560	<b>784</b>	<b>561</b>	783	562
481.wrf	32	629	568	635	563	<b>631</b>	<b>567</b>	32	628	569	629	568	<b>629</b>	<b>568</b>
482.sphinx3	32	1132	551	1140	547	<b>1135</b>	<b>550</b>	32	1244	502	<b>1229</b>	<b>508</b>	1228	508

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 539

Compute Blade 520H (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 529

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

### Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Thu Mar 13 19:45:43 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132335224 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 13 19:38

SPEC is set to: /home/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      133G  16G  110G  13% /
```

Additional information from dmidecode:

BIOS HITACHI EP1043 02/04/2014

Memory:

```
16x Not Specified Not Specified
8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 539

Compute Blade 520H (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 529

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

BladeSymphony BS520H and Hitachi Compute Blade 520H are electronically equivalent.

The results have been measured on a BladeSymphony BS520H

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 539

Compute Blade 520H (Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 529

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

**SPECfp\_rate2006 = 539**

Compute Blade 520H (Intel Xeon E5-2650 v2)

**SPECfp\_rate\_base2006 = 529**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Mar-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

**SPECfp\_rate2006 = 539**

Compute Blade 520H (Intel Xeon E5-2650 v2)

**SPECfp\_rate\_base2006 = 529**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Mar-2014

**Hardware Availability:** Feb-2014

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:33:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 June 2014.