



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp®\_rate2006 = 202

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp\_rate\_base2006 = 201

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

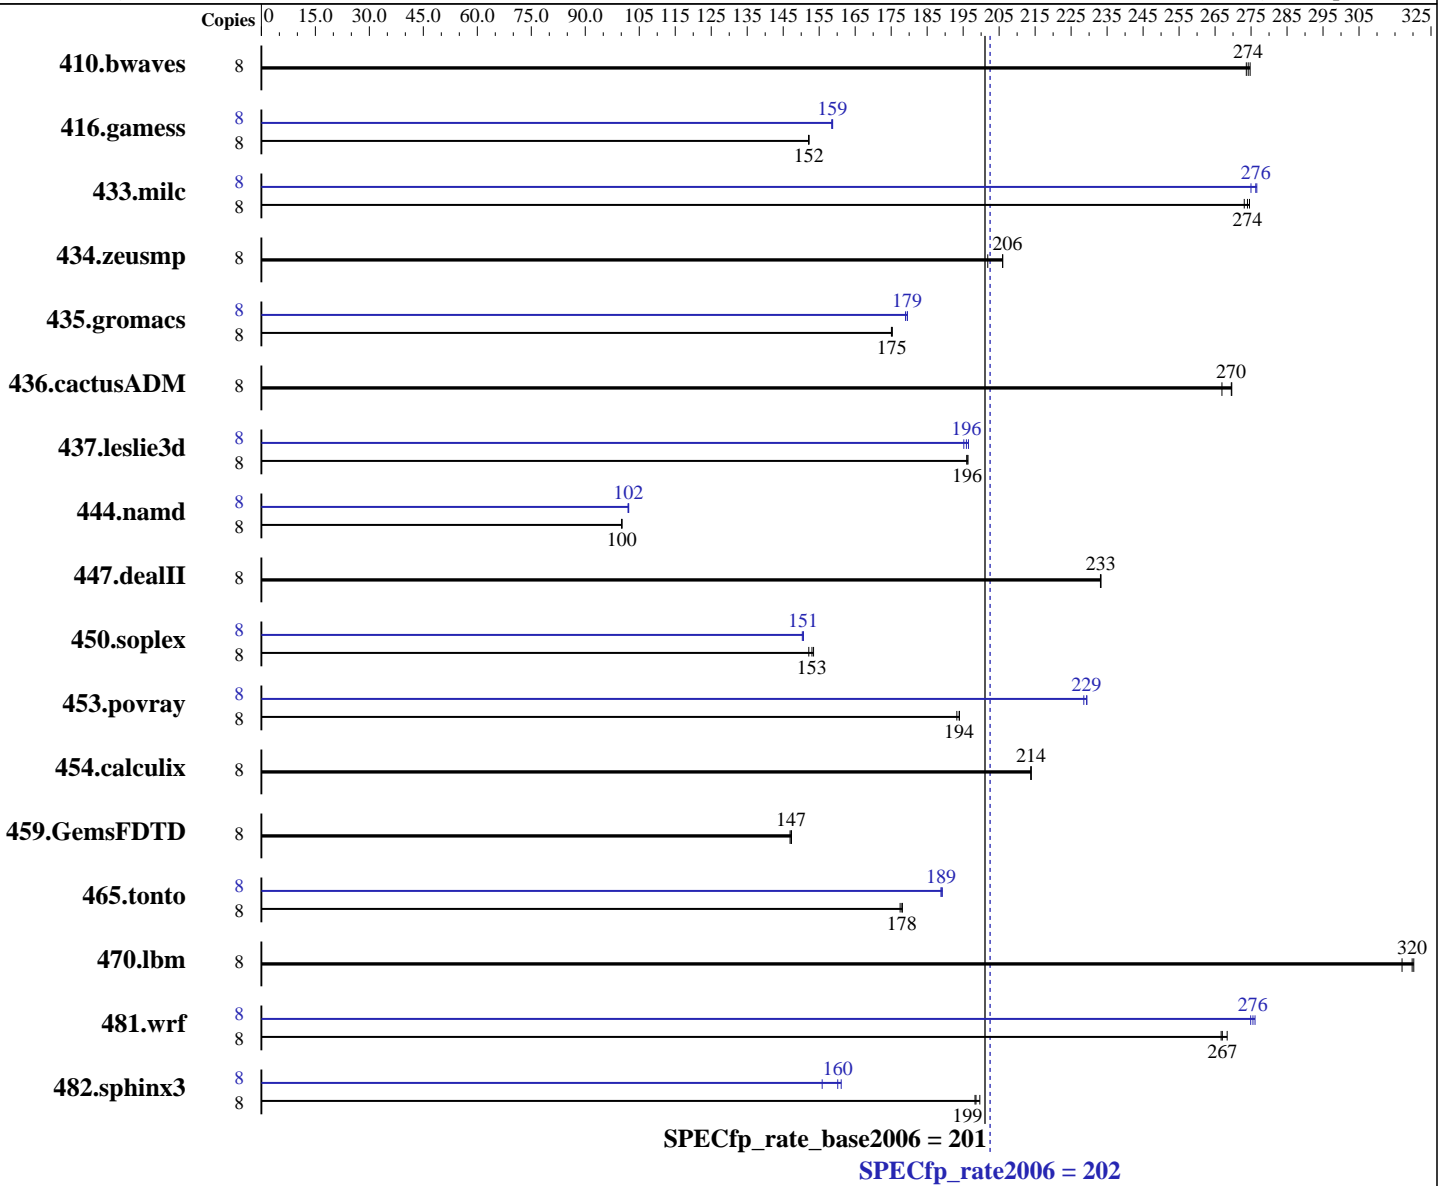

### Hardware

CPU Name: Intel Xeon E5-2603 v2  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp\_rate2006 = 202

SPECfp\_rate\_base2006 = 201

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	396	275	<b>396</b>	<b>274</b>	397	274	8	396	275	<b>396</b>	<b>274</b>	397	274		
416.gamess	8	<b>1030</b>	<b>152</b>	1030	152	1029	152	8	988	158	<b>987</b>	<b>159</b>	987	159		
433.milc	8	267	275	<b>268</b>	<b>274</b>	269	273	8	<b>266</b>	<b>276</b>	267	275	266	277		
434.zeusmp	8	353	206	<b>353</b>	<b>206</b>	361	202	8	353	206	<b>353</b>	<b>206</b>	361	202		
435.gromacs	8	326	175	326	175	<b>326</b>	<b>175</b>	8	319	179	318	180	<b>318</b>	<b>179</b>		
436.cactusADM	8	<b>355</b>	<b>270</b>	358	267	355	270	8	<b>355</b>	<b>270</b>	358	267	355	270		
437.leslie3d	8	<b>383</b>	<b>196</b>	383	196	384	196	8	385	195	383	196	<b>384</b>	<b>196</b>		
444.namd	8	641	100	<b>641</b>	<b>100</b>	640	100	8	629	102	<b>629</b>	<b>102</b>	630	102		
447.dealII	8	393	233	392	233	<b>392</b>	<b>233</b>	8	393	233	392	233	<b>392</b>	<b>233</b>		
450.soplex	8	<b>436</b>	<b>153</b>	439	152	435	153	8	444	150	<b>443</b>	<b>151</b>	443	151		
453.povray	8	220	193	219	194	<b>219</b>	<b>194</b>	8	186	229	<b>186</b>	<b>229</b>	186	229		
454.calculix	8	<b>309</b>	<b>214</b>	309	214	309	214	8	<b>309</b>	<b>214</b>	309	214	309	214		
459.GemsFDTD	8	576	147	<b>577</b>	<b>147</b>	578	147	8	576	147	<b>577</b>	<b>147</b>	578	147		
465.tonto	8	442	178	<b>442</b>	<b>178</b>	444	177	8	<b>417</b>	<b>189</b>	416	189	417	189		
470.lbm	8	<b>344</b>	<b>320</b>	343	320	347	317	8	<b>344</b>	<b>320</b>	343	320	347	317		
481.wrf	8	<b>335</b>	<b>267</b>	333	268	335	267	8	<b>324</b>	<b>276</b>	324	276	325	275		
482.sphinx3	8	781	200	786	198	<b>785</b>	<b>199</b>	8	<b>974</b>	<b>160</b>	1001	156	968	161		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp\_rate2006 = 202

SPECfp\_rate\_base2006 = 201

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

### Platform Notes

Bios Settings  
 Power Technology = Custom  
 Energy Performance = Performance  
 Turbo Mode = Enabled  
 C1E Support = Disabled  
 CPU C3 Report = Disabled  
 CPU C6 Report = Disabled  
 Package C State Limit = No Limit

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on localhost.localdomain Tue Apr 1 02:01:42 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal: 132128584 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19
17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 27 16:38

```
SPEC is set to: /cpu2006.1.2
Filesystem Type Size Used Avail Use% Mounted on
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 202**

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate\_base2006 = 201**

**CPU2006 license:** 9008

**Test date:** Apr-2014

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

## Platform Notes (Continued)

/dev/sda1 ext4 193G 72G 112G 39% /

Additional information from dmidecode:

BIOS American Megatrends Inc. 3.0a 02/13/2014

Memory:

16x 8 GB

14x Hynix Semiconducto HMT31GR7EFR4C 8 GB 1333 MHz 2 rank

2x Hynix Semiconductor HMT31GR7EFR4C- 8 GB 1333 MHz 2 rank

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 8 GB were used to run the test (128 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v2 chips + 256 GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate2006 = 202**

**SPECfp\_rate\_base2006 = 201**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Apr-2014

**Hardware Availability:** Oct-2013

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 202**

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate\_base2006 = 201**

**CPU2006 license:** 9008

**Test date:** Apr-2014

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp\_rate2006 = 202

SPECfp\_rate\_base2006 = 201

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Supermicro-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 222 S5 (Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate2006 = 202**

**SPECfp\_rate\_base2006 = 201**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Apr-2014

**Hardware Availability:** Oct-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:08:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 April 2014.