



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp®\_rate2006 = 1420

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp\_rate\_base2006 = 1390

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

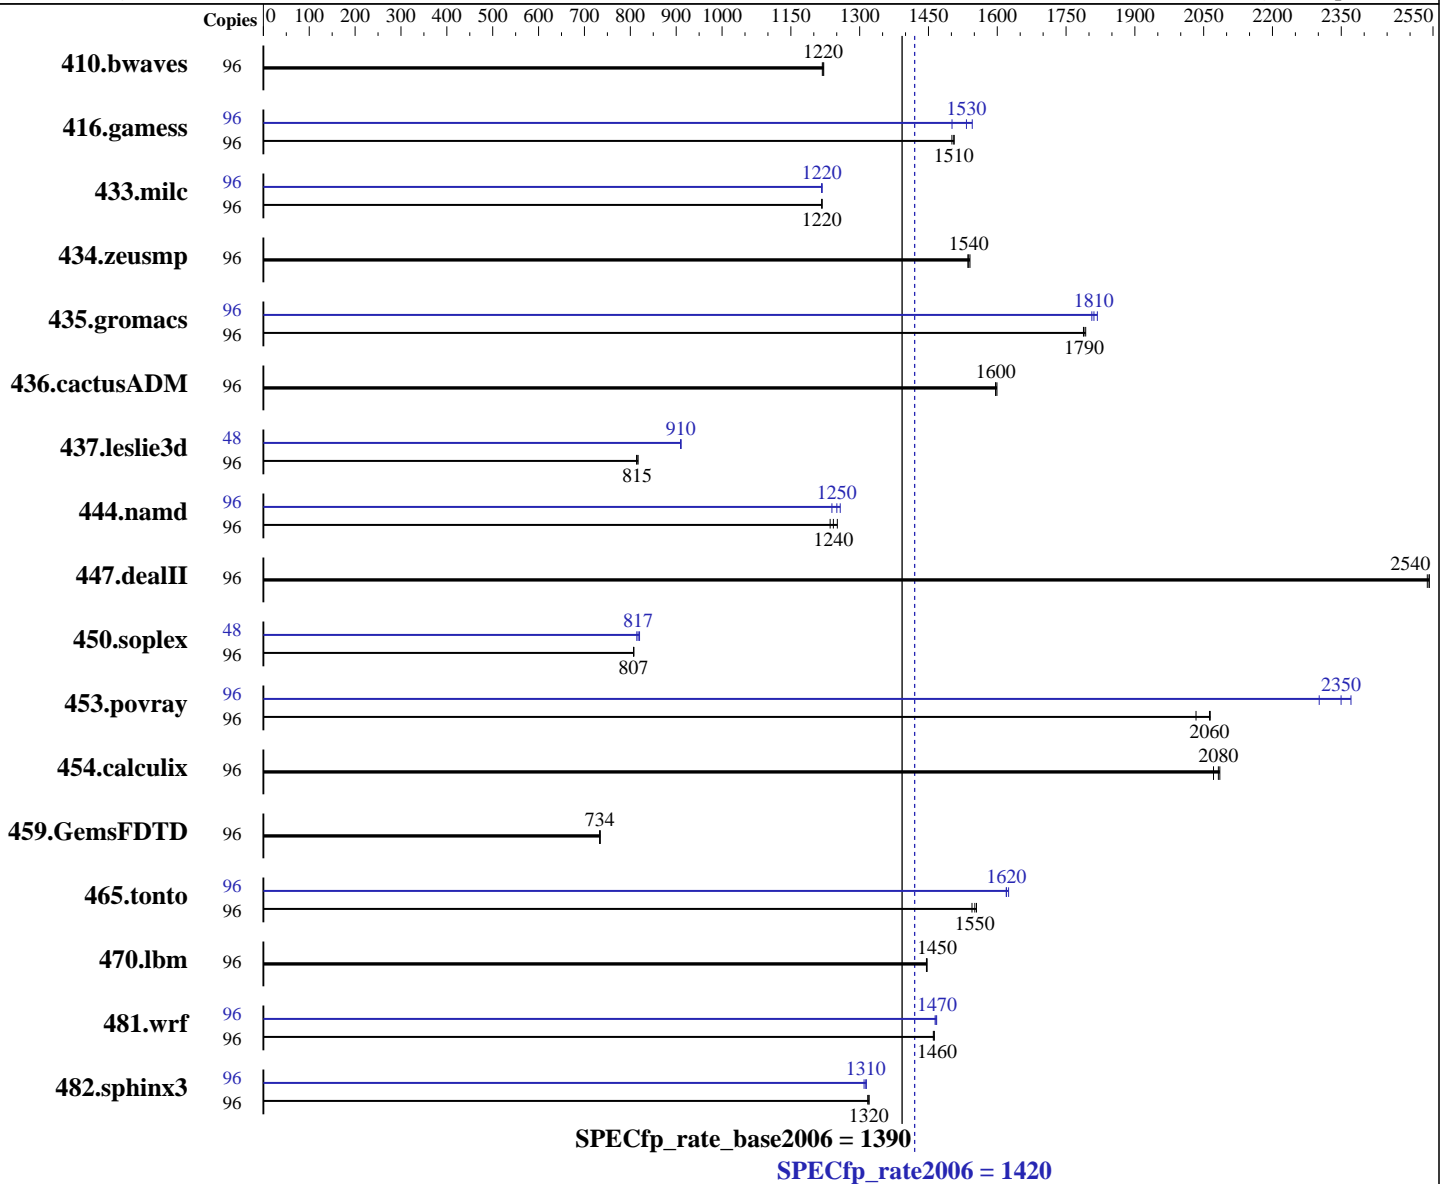

### Hardware

CPU Name: Intel Xeon E7-4860 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 1420

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp\_rate\_base2006 = 1390

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 2 x 300 GB SAS, 15000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: none

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	96	1068	1220	1071	1220	<b>1069</b>	<b>1220</b>	96	1068	1220	1071	1220	<b>1069</b>	<b>1220</b>		
416.gamess	96	1248	1510	<b>1249</b>	<b>1510</b>	1252	1500	96	1252	1500	<b>1226</b>	<b>1530</b>	1216	1550		
433.milc	96	724	1220	<b>724</b>	<b>1220</b>	724	1220	96	723	1220	724	1220	<b>724</b>	<b>1220</b>		
434.zeusmp	96	569	1540	<b>568</b>	<b>1540</b>	567	1540	96	569	1540	<b>568</b>	<b>1540</b>	567	1540		
435.gromacs	96	382	1790	<b>383</b>	<b>1790</b>	383	1790	96	377	1820	379	1810	<b>379</b>	<b>1810</b>		
436.cactusADM	96	719	1600	717	1600	<b>719</b>	<b>1600</b>	96	719	1600	717	1600	<b>719</b>	<b>1600</b>		
437.leslie3d	96	<b>1107</b>	<b>815</b>	1109	814	1104	817	48	496	910	<b>496</b>	<b>910</b>	496	909		
444.namd	96	615	1250	623	1240	<b>620</b>	<b>1240</b>	96	612	1260	621	1240	<b>616</b>	<b>1250</b>		
447.dealII	96	433	2540	432	2540	<b>432</b>	<b>2540</b>	96	433	2540	432	2540	<b>432</b>	<b>2540</b>		
450.soplex	96	<b>992</b>	<b>807</b>	991	808	992	807	48	488	820	492	814	<b>490</b>	<b>817</b>		
453.povray	96	247	2060	251	2030	<b>248</b>	<b>2060</b>	96	<b>217</b>	<b>2350</b>	222	2300	215	2370		
454.calculix	96	380	2090	382	2070	<b>380</b>	<b>2080</b>	96	380	2090	382	2070	<b>380</b>	<b>2080</b>		
459.GemsFDTD	96	1389	733	1387	734	<b>1388</b>	<b>734</b>	96	1389	733	1387	734	<b>1388</b>	<b>734</b>		
465.tonto	96	611	1540	608	1550	<b>609</b>	<b>1550</b>	96	583	1620	581	1620	<b>583</b>	<b>1620</b>		
470.lbm	96	<b>912</b>	<b>1450</b>	912	1450	912	1450	96	<b>912</b>	<b>1450</b>	912	1450	912	1450		
481.wrf	96	<b>733</b>	<b>1460</b>	733	1460	734	1460	96	731	1470	732	1460	<b>731</b>	<b>1470</b>		
482.sphinx3	96	1417	1320	<b>1417</b>	<b>1320</b>	1420	1320	96	<b>1425</b>	<b>1310</b>	1423	1310	1429	1310		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 1420

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp\_rate\_base2006 = 1390

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

### Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on RHEL6.5x8664 Thu Apr 17 10:01:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-4860 v2 @ 2.60GHz
4 "physical id"s (chips)
96 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

cache size : 30720 KB

From /proc/meminfo

```
MemTotal:      1058309204 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/usr/bin/lsc\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux RHEL6.5x8664 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 17 09:54

SPEC is set to: /home/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_rhel6-lv_home ext4  221G  5.4G  205G   3% /home
```

Additional information from dmidecode:

BIOS HITACHI 06-02 04/04/2014

Memory:

```
32x NO DIMM Unknown
1x Samsung 393B2G7 BH0 YH9 16 GB 1333 MHz 2 rank
3x Samsung M393B2G7 BH0 YK0 16 GB 1333 MHz 2 rank
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 1420

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp\_rate\_base2006 = 1390

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

### Platform Notes (Continued)

13x Samsung M393B2G70BH0-YK0 16 GB 1333 MHz 2 rank  
47x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECfp\_rate2006 = 1420**

**Compute Blade 520X (Intel Xeon E7-4860 v2)**

**SPECfp\_rate\_base2006 = 1390**

**CPU2006 license:** 35

**Test date:** Apr-2014

**Test sponsor:** HITACHI

**Hardware Availability:** Apr-2014

**Tested by:** HITACHI

**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 1420

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp\_rate\_base2006 = 1390

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

```

447.dealII: basepeak = yes

```

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 1420

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp\_rate\_base2006 = 1390

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:53:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 May 2014.