



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp<sup>®</sup>\_rate2006 = 184**

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate\_base2006 = 180**

CPU2006 license: 55


Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

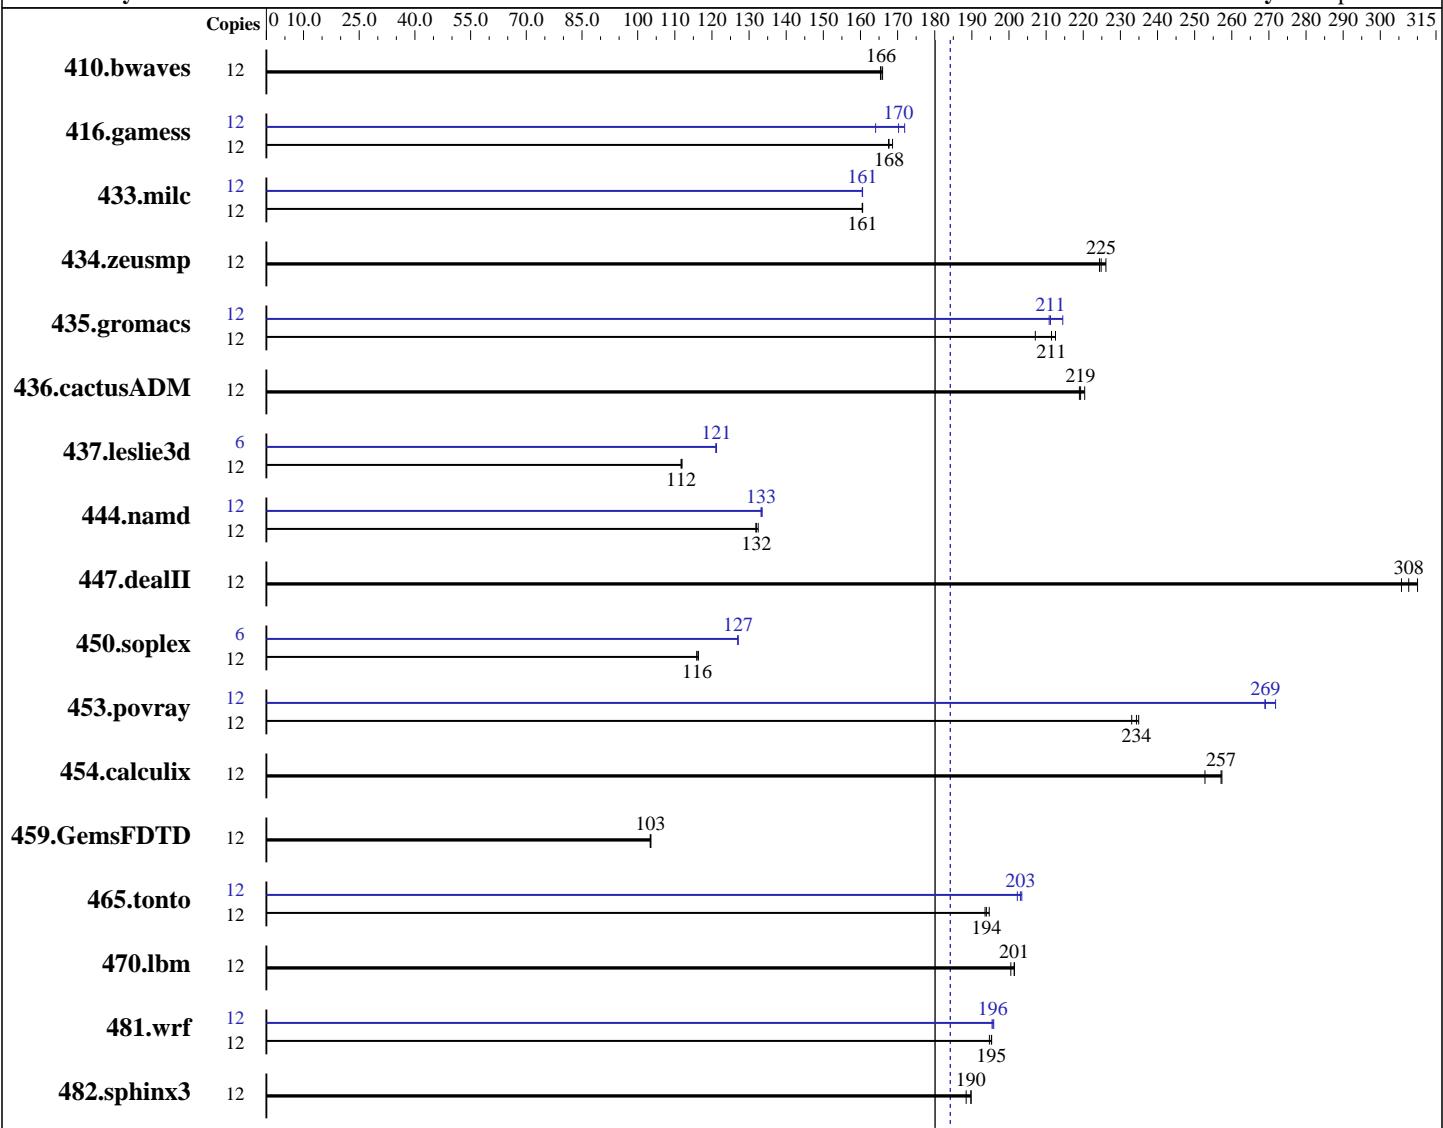

**SPECfp\_rate\_base2006 = 180**

**SPECfp\_rate2006 = 184**

## Hardware

CPU Name: Intel Xeon E5-2420 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
Compiler: 3.0.76-0.11-default  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel:  
File System: No  
System State: ext2  
Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 184**

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate\_base2006 = 180**

CPU2006 license: 55

Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1x 500 GB SATA 7200 RPM  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	983	166	<b>985</b>	<b>166</b>	986	165	12	983	166	<b>985</b>	<b>166</b>	986	165
416.gamess	12	1393	169	1402	168	<b>1401</b>	<b>168</b>	12	1367	172	1432	164	<b>1380</b>	<b>170</b>
433.milc	12	686	161	686	160	<b>686</b>	<b>161</b>	12	686	161	686	161	<b>686</b>	<b>161</b>
434.zeusmp	12	483	226	487	224	<b>486</b>	<b>225</b>	12	483	226	487	224	<b>486</b>	<b>225</b>
435.gromacs	12	403	213	414	207	<b>405</b>	<b>211</b>	12	<b>406</b>	<b>211</b>	399	214	406	211
436.cactusADM	12	655	219	<b>654</b>	<b>219</b>	651	220	12	655	219	<b>654</b>	<b>219</b>	651	220
437.leslie3d	12	1008	112	1010	112	<b>1009</b>	<b>112</b>	6	465	121	<b>465</b>	<b>121</b>	466	121
444.namd	12	727	132	730	132	<b>729</b>	<b>132</b>	12	722	133	<b>722</b>	<b>133</b>	721	134
447.dealII	12	<b>446</b>	<b>308</b>	443	310	449	306	12	<b>446</b>	<b>308</b>	443	310	449	306
450.soplex	12	860	116	863	116	<b>863</b>	<b>116</b>	6	394	127	394	127	<b>394</b>	<b>127</b>
453.povray	12	272	235	<b>272</b>	<b>234</b>	274	233	12	237	269	235	272	<b>237</b>	<b>269</b>
454.calculix	12	<b>385</b>	<b>257</b>	385	257	392	253	12	<b>385</b>	<b>257</b>	385	257	392	253
459.GemsFDTD	12	1232	103	<b>1231</b>	<b>103</b>	1229	104	12	1232	103	<b>1231</b>	<b>103</b>	1229	104
465.tonto	12	610	194	607	195	<b>609</b>	<b>194</b>	12	<b>581</b>	<b>203</b>	584	202	580	203
470.lbm	12	818	201	<b>819</b>	<b>201</b>	822	200	12	818	201	<b>819</b>	<b>201</b>	822	200
481.wrf	12	<b>686</b>	<b>195</b>	686	195	688	195	12	684	196	686	195	<b>685</b>	<b>196</b>
482.sphinx3	12	1232	190	<b>1233</b>	<b>190</b>	1241	188	12	1232	190	<b>1233</b>	<b>190</b>	1241	188

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Virtualization Technology disabled  
 Execute Disable disabled  
 Logical Processor enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 184**

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate\_base2006 = 180**

**CPU2006 license:** 55

**Test date:** May-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jan-2014

**Tested by:** Dell Inc.

**Software Availability:** Sep-2013

## Platform Notes (Continued)

System Profile set to Performance

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on t420-cpu2006 Wed May 28 04:23:45 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2420 v2 @ 2.20GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

cache size : 15360 KB

From /proc/meminfo

MemTotal: 99156536 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 11 (x86\_64)

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 11 (x86\_64)

VERSION = 11

PATCHLEVEL = 3

uname -a:

Linux t420-cpu2006 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013  
(ccab990) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 May 27 12:14 last=S

SPEC is set to: /root/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext2	222G	19G	202G	9%	/

Additional information from dmidecode:

BIOS Dell Inc. 2.0.22 11/19/2013

Memory:

3x 00CE00B300CE M393B2G70BH0-CK0 16 GB 1600 MHz

3x 00CE04B300CE M393B2G70BH0-YK0 16 GB 1600 MHz

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate2006 = 184**

CPU2006 license: 55

Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate2006 = 184**

CPU2006 license: 55

Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate2006 = 184**

**SPECfp\_rate\_base2006 = 180**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -auto-ilp32
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T420 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECfp\_rate2006 = 184**

CPU2006 license: 55

Test date: May-2014

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 00:12:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 July 2014.