



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 1160

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECfp_rate_base2006 = 1130

CPU2006 license: 3175


Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

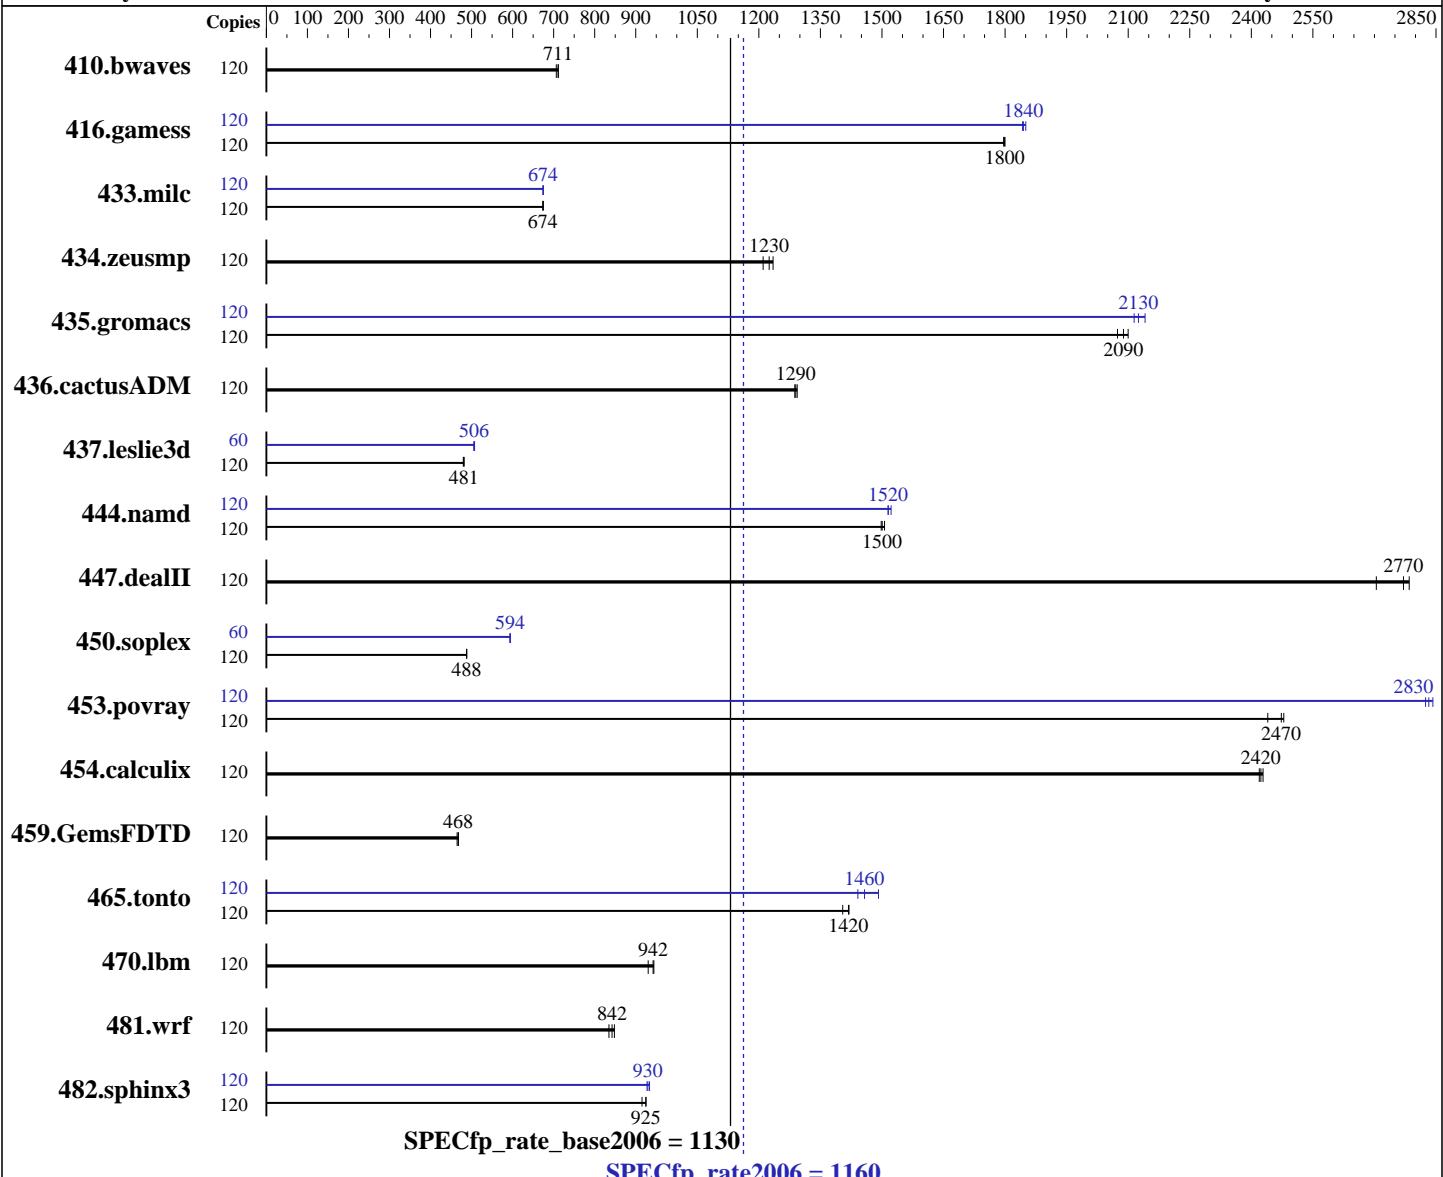

Hardware

CPU Name: Intel Xeon E7-4880 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1160

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECfp_rate_base2006 = 1130

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 37.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	120	2308	706	<u>2294</u>	<u>711</u>	2293	711	120	2308	706	<u>2294</u>	<u>711</u>	2293	711		
416.gamess	120	1306	1800	1308	1800	<u>1306</u>	<u>1800</u>	120	<u>1274</u>	<u>1840</u>	1275	1840	1270	1850		
433.milc	120	<u>1635</u>	<u>674</u>	1633	675	1635	674	120	1633	675	1635	674	<u>1633</u>	<u>674</u>		
434.zeusmp	120	902	1210	884	1230	<u>891</u>	<u>1230</u>	120	902	1210	884	1230	<u>891</u>	<u>1230</u>		
435.gromacs	120	413	2070	<u>410</u>	<u>2090</u>	408	2100	120	400	2140	<u>403</u>	<u>2130</u>	405	2110		
436.cactusADM	120	1114	1290	<u>1112</u>	<u>1290</u>	1109	1290	120	1114	1290	<u>1112</u>	<u>1290</u>	1109	1290		
437.leslie3d	120	2351	480	<u>2344</u>	<u>481</u>	2342	482	60	<u>1114</u>	<u>506</u>	1112	507	1116	506		
444.namd	120	642	1500	639	1510	<u>641</u>	<u>1500</u>	120	635	1510	632	1520	<u>635</u>	<u>1520</u>		
447.dealII	120	<u>495</u>	<u>2770</u>	493	2780	508	2700	120	<u>495</u>	<u>2770</u>	493	2780	508	2700		
450.soplex	120	2052	488	2050	488	<u>2051</u>	<u>488</u>	60	843	594	<u>843</u>	<u>594</u>	842	594		
453.povray	120	262	2440	258	2480	<u>258</u>	<u>2470</u>	120	226	2820	<u>225</u>	<u>2830</u>	225	2840		
454.calculix	120	408	2430	<u>409</u>	<u>2420</u>	409	2420	120	408	2430	<u>409</u>	<u>2420</u>	409	2420		
459.GemsFDTD	120	2720	468	2740	465	<u>2723</u>	<u>468</u>	120	2720	468	2740	465	<u>2723</u>	<u>468</u>		
465.tonto	120	841	1400	832	1420	<u>832</u>	<u>1420</u>	120	792	1490	<u>810</u>	<u>1460</u>	819	1440		
470.lbm	120	<u>1750</u>	<u>942</u>	1746	944	1772	930	120	<u>1750</u>	<u>942</u>	1746	944	1772	930		
481.wrf	120	<u>1591</u>	<u>842</u>	1581	848	1606	835	120	<u>1591</u>	<u>842</u>	1581	848	1606	835		
482.sphinx3	120	2528	925	<u>2530</u>	<u>925</u>	2555	915	120	2521	928	<u>2516</u>	<u>930</u>	2505	934		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1160

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECfp_rate_base2006 = 1130

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on RH5885V3 Thu Jul 10 16:20:23 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4880 v2 @ 2.50GHz
 4 "physical id"s (chips)
 120 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 15
siblings : 30
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size : 38400 KB

From /proc/meminfo
MemTotal: 529097820 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux RH5885V3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 10 15:59

SPEC is set to: /spec
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 385G 119G 247G 33% /spec

Additional information from dmidecode:

BIOS American Megatrends Inc. BLISV050 06/07/2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1160

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECfp_rate_base2006 = 1130

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

Memory:

32x 16 GB
28x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank
4x Hynix HMT42GR7MFR4C-PB 16 GB 1333 MHz 2 rank
16x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

28x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank
4x Hynix HMT42GR7MFR4C-PB 16 GB 1333 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1130

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1130

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
  -unroll12
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -fno-alias -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECfp_rate2006 = 1160

SPECfp_rate_base2006 = 1130

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 1160

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECfp_rate_base2006 = 1130

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 30 10:53:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.