



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DH87MC Motherboard (Intel Celeron G1820)

**SPECfp®\_rate2006 = 66.7**

**SPECfp\_rate\_base2006 = 65.9**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Oct-2013

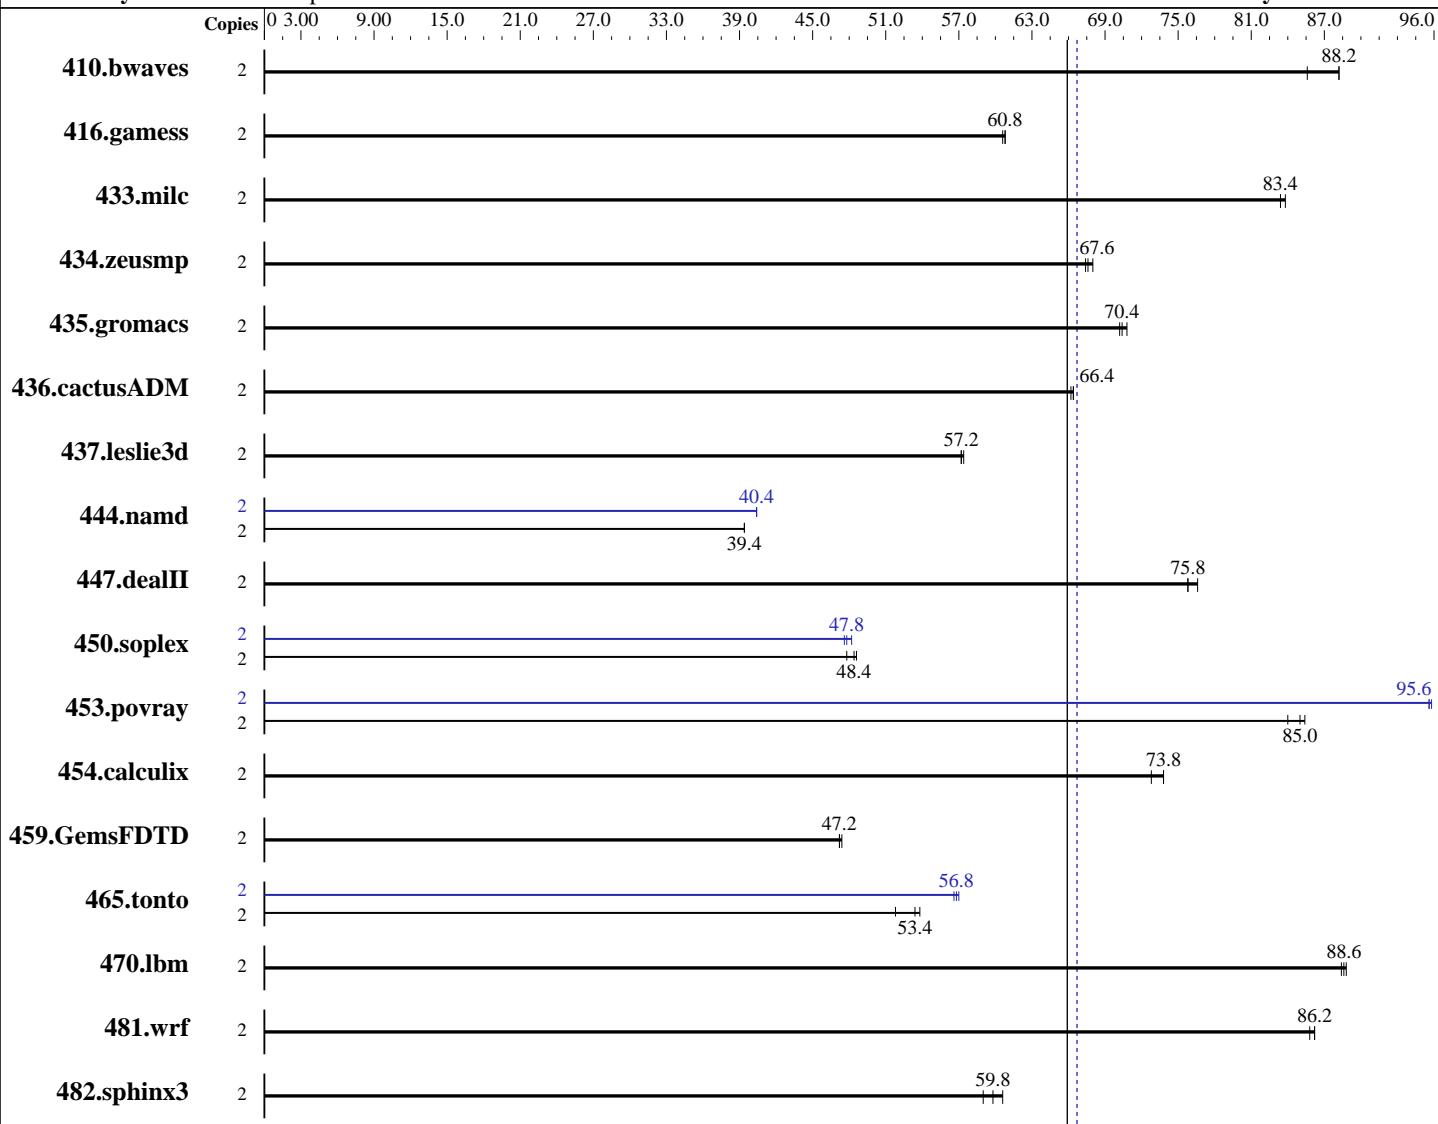

**SPECfp\_rate\_base2006 = 65.9**

**SPECfp\_rate2006 = 66.7**

### Hardware

CPU Name: Intel Celeron G1820  
 CPU Characteristics:  
 CPU MHz:  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Microsoft Windows 8.1 Pro  
 6.3.9600 N/A Build 9600  
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;  
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: No

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECfp\_rate2006 = 66.7**

Intel DH87MC Motherboard (Intel Celeron G1820)

**SPECfp\_rate\_base2006 = 65.9**

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Dec-2013

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM  
 Other Hardware: None

File System: NTFS  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	317	85.6	<u>308</u>	<u>88.2</u>	308	88.2	2	317	85.6	<u>308</u>	<u>88.2</u>	308	88.2
416.gamess	2	647	60.6	644	60.8	<u>644</u>	<u>60.8</u>	2	647	60.6	644	60.8	<u>644</u>	<u>60.8</u>
433.milc	2	<u>220</u>	<u>83.4</u>	219	83.8	220	83.4	2	<u>220</u>	<u>83.4</u>	219	83.8	220	83.4
434.zeusmp	2	<u>269</u>	<u>67.6</u>	270	67.4	268	68.0	2	<u>269</u>	<u>67.6</u>	270	67.4	268	68.0
435.gromacs	2	202	70.8	203	70.2	<u>203</u>	<u>70.4</u>	2	202	70.8	203	70.2	<u>203</u>	<u>70.4</u>
436.cactusADM	2	<u>360</u>	<u>66.4</u>	360	66.4	361	66.2	2	<u>360</u>	<u>66.4</u>	360	66.4	361	66.2
437.leslie3d	2	<u>328</u>	<u>57.2</u>	327	57.4	329	57.2	2	<u>328</u>	<u>57.2</u>	327	57.4	329	57.2
444.namd	2	408	39.4	<u>408</u>	<u>39.4</u>	408	39.4	2	398	40.4	<u>398</u>	<u>40.4</u>	397	40.4
447.dealII	2	302	75.8	299	76.6	<u>302</u>	<u>75.8</u>	2	302	75.8	299	76.6	<u>302</u>	<u>75.8</u>
450.soplex	2	348	47.8	<u>345</u>	<u>48.4</u>	343	48.6	2	351	47.6	347	48.2	<u>348</u>	<u>47.8</u>
453.povray	2	<u>125</u>	<u>85.0</u>	127	84.0	125	85.4	2	111	95.8	<u>111</u>	<u>95.6</u>	111	95.6
454.calculix	2	<u>224</u>	<u>73.8</u>	227	72.8	223	73.8	2	<u>224</u>	<u>73.8</u>	227	72.8	223	73.8
459.GemsFDTD	2	<u>449</u>	<u>47.2</u>	450	47.2	449	47.4	2	<u>449</u>	<u>47.2</u>	450	47.2	449	47.4
465.tonto	2	379	51.8	<u>369</u>	<u>53.4</u>	366	53.8	2	348	56.6	<u>347</u>	<u>56.8</u>	345	57.0
470.lbm	2	<u>310</u>	<u>88.6</u>	311	88.4	310	88.8	2	<u>310</u>	<u>88.6</u>	311	88.4	310	88.8
481.wrf	2	259	86.2	<u>259</u>	<u>86.2</u>	260	85.8	2	259	86.2	<u>259</u>	<u>86.2</u>	260	85.8
482.sphinx3	2	<u>651</u>	<u>59.8</u>	660	59.0	643	60.6	2	<u>651</u>	<u>59.8</u>	660	59.0	643	60.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:

"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DH87MC Motherboard (Intel Celeron G1820)

**SPECfp\_rate2006 = 66.7**

CPU2006 license: 13

**Test date:** Jun-2014

Test sponsor: Intel Corporation

**Hardware Availability:** Dec-2013

Tested by: Intel Corporation

**Software Availability:** Oct-2013

## Platform Notes

```
Sysinfo program C:\SPEC14.0\Docs\sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt54BEF70B2EDF Sat Jun 28 14:48:57 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 8.1 Pro
OS Version   : 6.3.9600 N/A Build 9600
System Manufacturer: INTEL_
System Model  : DH87MC_
Processor(s) : 1 Processor(s) Installed.
[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2694 Mhz
BIOS Version  : Intel Corp. MCH8710H.86A.0047.2013.0606.1508, 6/6/2013
Total Physical Memory: 7,864 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 512
L3CacheSize  : 2048
MaxClockSpeed : 2694
Name         : Intel(R) Celeron(R) CPU G1820 @ 2.70GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2
```

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DH87MC Motherboard (Intel Celeron G1820)

**SPECfp\_rate2006 = 66.7**

CPU2006 license: 13

**Test date:** Jun-2014

**Test sponsor:** Intel Corporation

**Hardware Availability:** Dec-2013

**Tested by:** Intel Corporation

**Software Availability:** Oct-2013

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64  
416.gamess: -DSPEC\_CPU\_P64  
433.milc: -DSPEC\_CPU\_P64  
434.zeusmp: -DSPEC\_CPU\_P64  
435.gromacs: -DSPEC\_CPU\_P64  
436.cactusADM: -DSPEC\_CPU\_P64 /names:lowercase /assume:underscore  
437.leslie3d: -DSPEC\_CPU\_P64  
444.namd: -DSPEC\_CPU\_P64 /TP  
447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-Qoption\_cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros  
450.soplex: -DSPEC\_CPU\_P64  
453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP  
454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER /names:lowercase  
459.GemsFDTD: -DSPEC\_CPU\_P64  
465.tonto: -DSPEC\_CPU\_P64  
470.lbm: -DSPEC\_CPU\_P64  
481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

**SPECfp\_rate2006 = 66.7**

Intel DH87MC Motherboard (Intel Celeron G1820)

**SPECfp\_rate\_base2006 = 65.9**

**CPU2006 license:** 13

**Test date:** Jun-2014

**Test sponsor:** Intel Corporation

**Hardware Availability:** Dec-2013

**Tested by:** Intel Corporation

**Software Availability:** Oct-2013

## Peak Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
           shlw64M.lib           -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qauto-ilp32 /F1000000000 shlw64M.lib
           -link /FORCE:MULTIPLE
```

```
453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
           /F1000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DH87MC Motherboard (Intel Celeron G1820)

**SPECfp\_rate2006 = 66.7**

**SPECfp\_rate\_base2006 = 65.9**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jun-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Oct-2013

## Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll14 -Qauto /F1000000000  
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 30 10:54:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 July 2014.