



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp®_rate2006 = 133

CPU2006 license: 13


Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

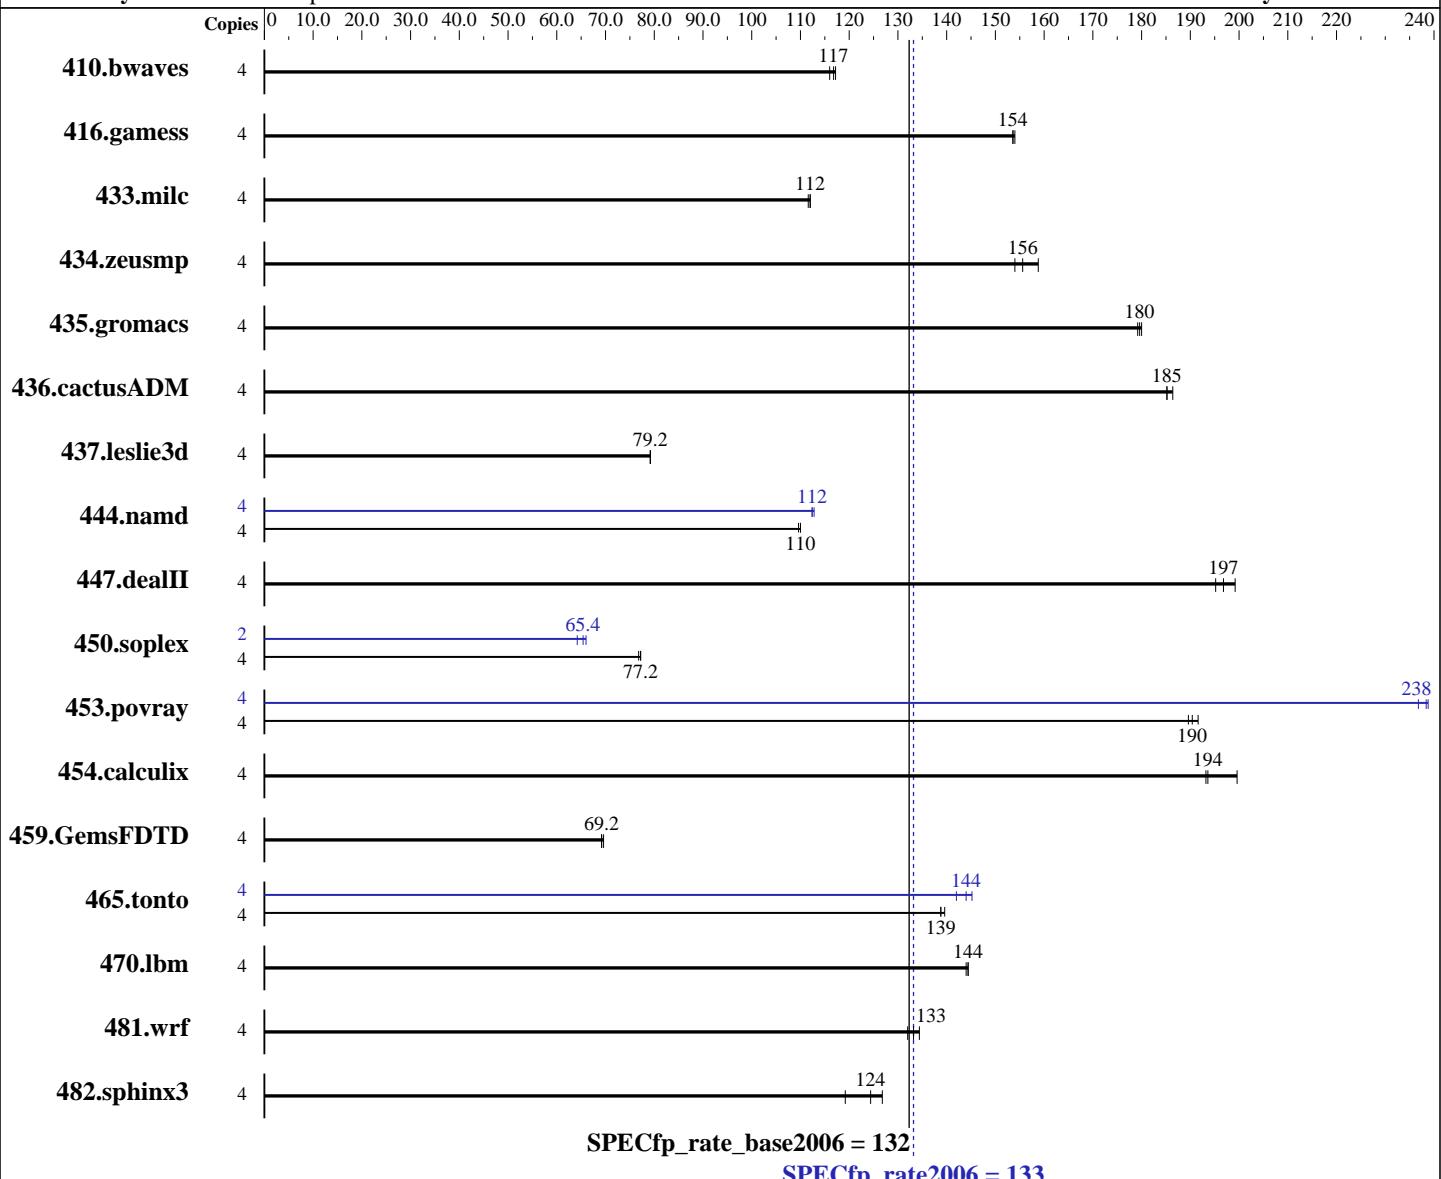

Hardware

CPU Name: Intel Core i5-4590
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_rate2006 = 133

SPECfp_rate_base2006 = 132

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	469	116	465	117	465	117	4	469	116	465	117	465	117
416.gamess	4	509	154	510	154	510	154	4	509	154	510	154	510	154
433.milc	4	329	112	328	112	328	112	4	329	112	328	112	328	112
434.zeusmp	4	230	159	236	154	234	156	4	230	159	236	154	234	156
435.gromacs	4	159	179	159	180	159	180	4	159	179	159	180	159	180
436.cactusADM	4	258	185	258	185	257	186	4	258	185	258	185	257	186
437.leslie3d	4	474	79.2	475	79.2	474	79.2	4	474	79.2	475	79.2	474	79.2
444.namd	4	292	110	292	110	291	110	4	285	112	285	112	285	113
447.dealII	4	233	197	235	195	230	199	4	233	197	235	195	230	199
450.soplex	4	432	77.2	433	77.2	434	76.8	2	260	64.2	253	66.0	255	65.4
453.povray	4	112	190	112	190	111	192	4	89.8	237	89.1	239	89.2	238
454.calculix	4	170	194	171	193	165	200	4	170	194	171	193	165	200
459.GemsFDTD	4	612	69.2	611	69.6	612	69.2	4	612	69.2	611	69.6	612	69.2
465.tonto	4	283	139	283	139	282	140	4	274	144	271	145	277	142
470.lbm	4	381	144	381	144	380	144	4	381	144	381	144	380	144
481.wrf	4	335	133	332	134	339	132	4	335	133	332	134	339	132
482.sphinx3	4	653	119	616	127	627	124	4	653	119	616	127	627	124

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:

"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_rate2006 = 133

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes

```
Sysinfo program C:\SPEC14.0\Docs\sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DEDFA Sat Jun 28 07:54:11 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 8.1 Pro
OS Version   : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model  : All Series
Processor(s)  : 1 Processor(s) Installed.
[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3301 Mhz
BIOS Version  : American Megatrends Inc. 2001, 6/13/2014
Total Physical Memory: 8,006 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 1024
L3CacheSize  : 6144
MaxClockSpeed : 3301
Name         : Intel(R) Core(TM) i5-4590 CPU @ 3.30GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_rate2006 = 133

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

SPECfp_rate_base2006 = 132

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption_cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F10000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F10000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F10000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F10000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 133

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_rate_base2006 = 132

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
           shlw64M.lib           -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qauto-ilp32 /F1000000000 shlw64M.lib
           -link /FORCE:MULTIPLE
```

```
453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
           /F1000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECfp_rate2006 = 133

SPECfp_rate_base2006 = 132

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jun-2014

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll14 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 9 10:50:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 August 2014.