



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp®\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

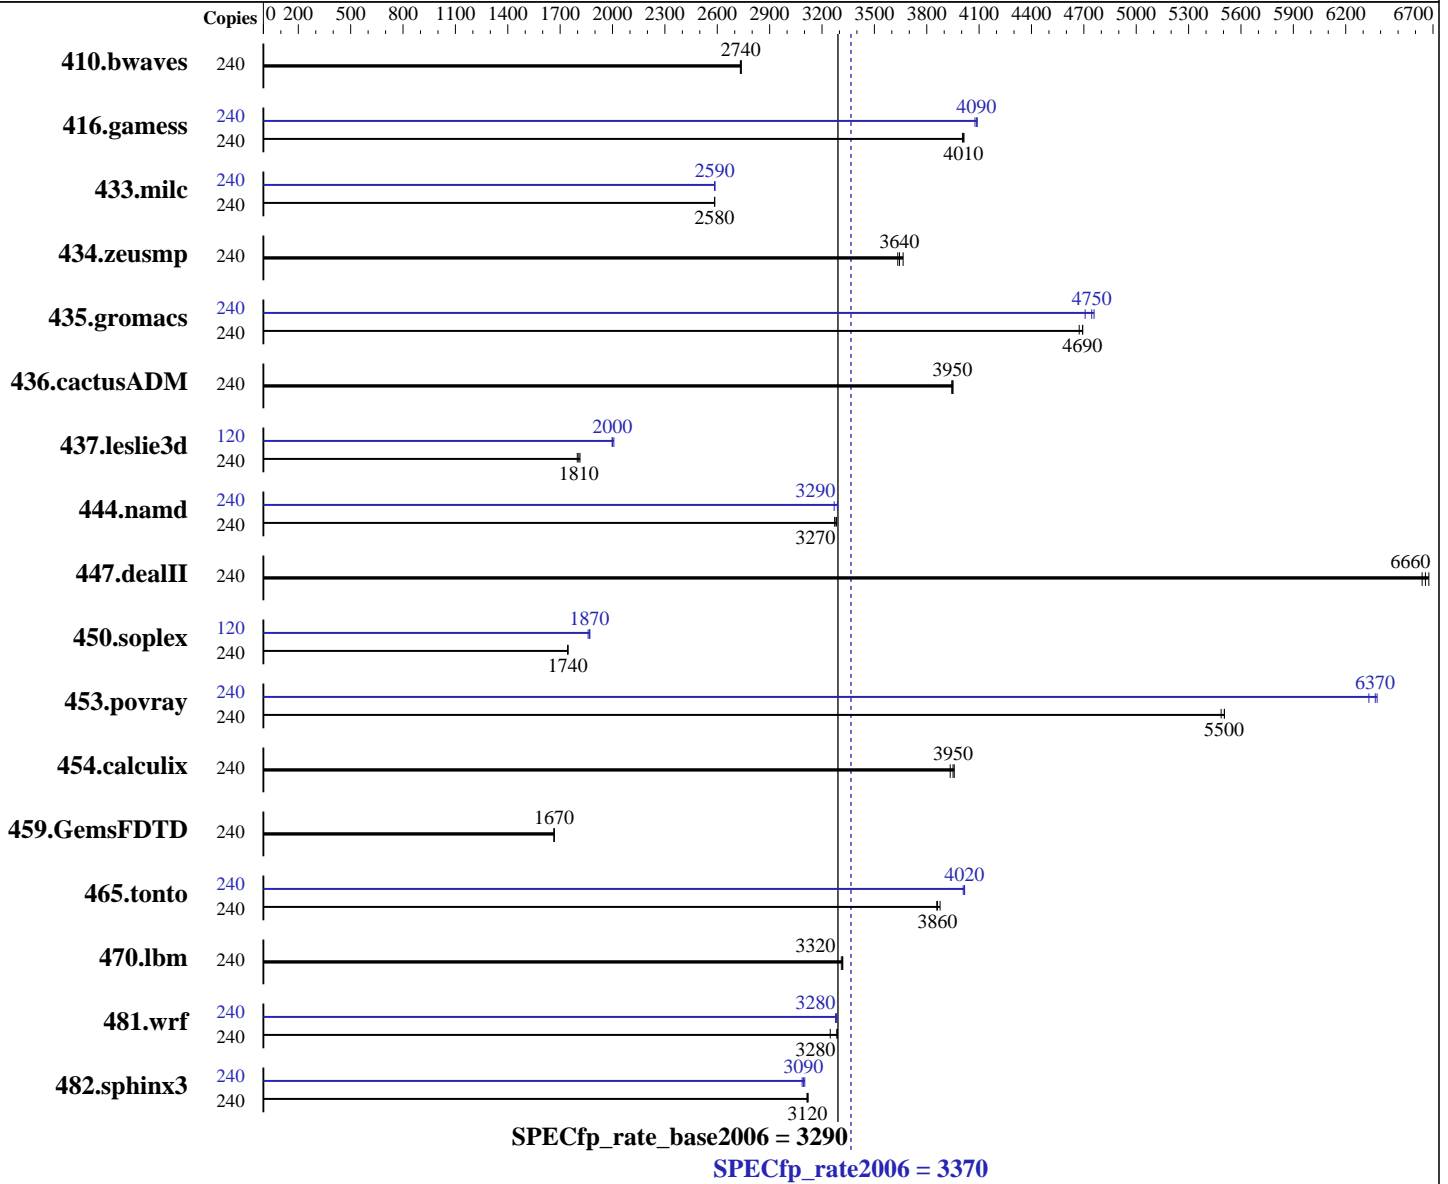

### Hardware

CPU Name: Intel Xeon E7-8890 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 120 cores, 8 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 4,8 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

L3 Cache: 37.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 2 TB (128 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	240	1194	2730	1191	2740	<b>1192</b>	<b>2740</b>	240	1194	2730	1191	2740	<b>1192</b>	<b>2740</b>
416.gamess	240	1171	4010	<b>1172</b>	<b>4010</b>	1173	4000	240	1149	4090	<b>1150</b>	<b>4090</b>	1153	4080
433.milc	240	852	2590	<b>852</b>	<b>2580</b>	853	2580	240	852	2580	852	2590	<b>852</b>	<b>2590</b>
434.zeusmp	240	596	3660	601	3630	<b>599</b>	<b>3640</b>	240	596	3660	601	3630	<b>599</b>	<b>3640</b>
435.gromacs	240	367	4670	365	4690	<b>365</b>	<b>4690</b>	240	364	4710	360	4760	<b>361</b>	<b>4750</b>
436.cactusADM	240	727	3940	726	3950	<b>726</b>	<b>3950</b>	240	727	3940	726	3950	<b>726</b>	<b>3950</b>
437.leslie3d	240	1255	1800	1244	1810	<b>1249</b>	<b>1810</b>	120	<b>564</b>	<b>2000</b>	562	2010	564	2000
444.namd	240	<b>588</b>	<b>3270</b>	586	3280	588	3270	240	585	3290	589	3270	<b>585</b>	<b>3290</b>
447.dealII	240	414	6640	<b>412</b>	<b>6660</b>	411	6680	240	414	6640	<b>412</b>	<b>6660</b>	411	6680
450.soplex	240	1147	1750	1148	1740	<b>1148</b>	<b>1740</b>	120	535	1870	<b>535</b>	<b>1870</b>	538	1860
453.povray	240	233	5490	<b>232</b>	<b>5500</b>	232	5510	240	202	6330	<b>200</b>	<b>6370</b>	200	6380
454.calculix	240	500	3960	503	3930	<b>501</b>	<b>3950</b>	240	500	3960	503	3930	<b>501</b>	<b>3950</b>
459.GemsFDTD	240	<b>1529</b>	<b>1670</b>	1529	1660	1529	1670	240	<b>1529</b>	<b>1670</b>	1529	1660	1529	1670
465.tonto	240	609	3880	612	3860	<b>612</b>	<b>3860</b>	240	589	4010	<b>588</b>	<b>4020</b>	588	4020
470.lbm	240	996	3310	994	3320	<b>994</b>	<b>3320</b>	240	996	3310	994	3320	<b>994</b>	<b>3320</b>
481.wrf	240	815	3290	<b>816</b>	<b>3280</b>	826	3250	240	818	3280	<b>817</b>	<b>3280</b>	816	3280
482.sphinx3	240	1499	3120	<b>1501</b>	<b>3120</b>	1502	3110	240	<b>1512</b>	<b>3090</b>	1508	3100	1516	3090

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

### Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock\_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on rh8100v3 Sat Jul 26 22:11:27 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8890 v2 @ 2.80GHz

8 "physical id"s (chips)

240 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 15

siblings : 30

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

cache size : 38400 KB

From /proc/meminfo

MemTotal: 2117574308 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux rh8100v3 2.6.32-431.el6.x86\_64 #1 SMP Sun Nov 10 22:19:54 EST 2013

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jul 26 06:46

SPEC is set to: /spec

Filesystem Type Size Used Avail Use% Mounted on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jul-2014  
Hardware Availability: Feb-2014  
Software Availability: Nov-2013

## Platform Notes (Continued)

```
/dev/sdb1      ext4  673G  214G  426G  34% /spec
```

Additional information from dmidecode:

BIOS American Megatrends Inc. BLHSV016 06/05/2014

Memory:

128x 16 GB

123x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank

5x Hynix HMT42GR7MFR4C-PB 16 GB 1333 MHz 2 rank

64x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 2 TB and the dmidecode description should have two lines reading as:

123x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank

5x Hynix HMT42GR7MFR4C-PB 16 GB 1333 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

482.sphinx3: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 3370

Huawei RH8100 V3 (Intel Xeon E7-8890 v2)

SPECfp\_rate\_base2006 = 3290

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 3 12:06:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 September 2014.