



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

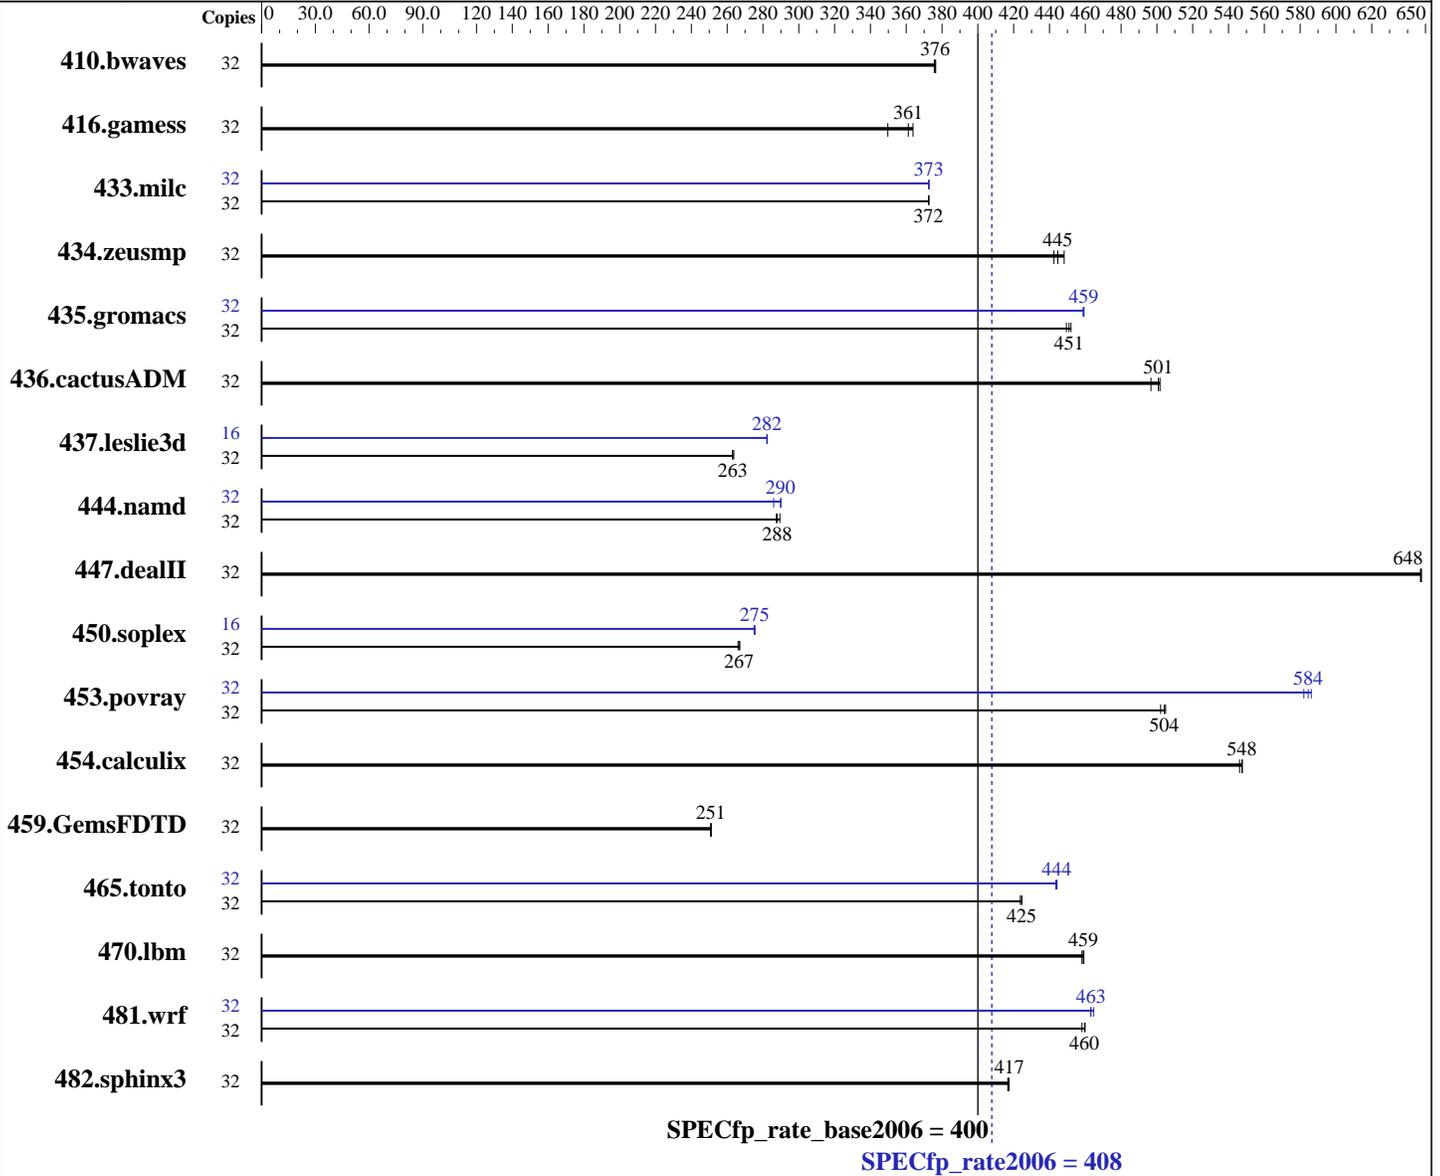

Hardware

CPU Name: Intel Xeon E5-2658
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10000RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1155	376	<u>1156</u>	<u>376</u>	1158	376	32	1155	376	<u>1156</u>	<u>376</u>	1158	376
416.gamess	32	1722	364	1792	350	<u>1735</u>	<u>361</u>	32	1722	364	1792	350	<u>1735</u>	<u>361</u>
433.milc	32	<u>789</u>	<u>372</u>	788	373	789	372	32	789	372	<u>788</u>	<u>373</u>	788	373
434.zeusmp	32	<u>655</u>	<u>445</u>	650	448	658	442	32	<u>655</u>	<u>445</u>	650	448	658	442
435.gromacs	32	<u>507</u>	<u>451</u>	508	449	505	452	32	497	459	498	459	<u>498</u>	<u>459</u>
436.cactusADM	32	762	502	770	497	<u>764</u>	<u>501</u>	32	762	502	770	497	<u>764</u>	<u>501</u>
437.leslie3d	32	<u>1143</u>	<u>263</u>	1144	263	1141	264	16	533	282	<u>533</u>	<u>282</u>	533	282
444.namd	32	887	289	893	287	<u>891</u>	<u>288</u>	32	<u>886</u>	<u>290</u>	897	286	885	290
447.dealII	32	<u>565</u>	<u>648</u>	565	648	566	647	32	<u>565</u>	<u>648</u>	565	648	566	647
450.soplex	32	999	267	<u>1001</u>	<u>267</u>	1003	266	16	485	275	484	276	<u>485</u>	<u>275</u>
453.povray	32	337	505	339	502	<u>338</u>	<u>504</u>	32	290	586	<u>291</u>	<u>584</u>	292	582
454.calculix	32	482	548	483	546	<u>482</u>	<u>548</u>	32	482	548	483	546	<u>482</u>	<u>548</u>
459.GemsFDTD	32	1354	251	<u>1353</u>	<u>251</u>	1352	251	32	1354	251	<u>1353</u>	<u>251</u>	1352	251
465.tonto	32	<u>742</u>	<u>425</u>	743	424	742	425	32	710	444	709	444	<u>709</u>	<u>444</u>
470.lbm	32	<u>958</u>	<u>459</u>	960	458	957	459	32	<u>958</u>	<u>459</u>	960	458	957	459
481.wrf	32	<u>778</u>	<u>460</u>	777	460	780	458	32	772	463	<u>772</u>	<u>463</u>	769	465
482.sphinx3	32	1497	417	<u>1495</u>	<u>417</u>	1494	417	32	1497	417	<u>1495</u>	<u>417</u>	1494	417

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Custom
Baseboard Management Controller used to adjust the fan speed to 100%

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Platform Notes (Continued)

Sysinfo program /spec/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on wbspeccpu Thu Jul 17 01:19:25 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132103760 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux wbspeccpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 16 09:29
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  270G   66G  191G  26% /
```

```
Additional information from dmidecode:
BIOS Insyde Corp. RMIBV372 12/21/2013
Memory:
 16x Micron 18JSF1G72PDZ-1G6E 8 GB 1600 MHz 2 rank
 8x NO DIMM NO DIMM
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175

Test date: Jul-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
 -inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 408

Huawei RH1288 v2 (Intel Xeon E5-2658)

SPECfp_rate_base2006 = 400

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 3 17:50:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 August 2014.